V364 **Relay**

External Bluetooth® (max 3 meters)

CONNECTED ACTUATOR WITH EXTERNAL BLUETOOTH®





Make your access points smart

Relay allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.


Concealed installation

Relay device can have an integrated or external Bluetooth antenna, in order to install the device even in unconventional installation spaces: the antenna can be installed in another point and connected to the device.

Product features

- Allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact
- REX (REquest to eXit) is and Opto-insulated input to open the relay with a button distant up to 100 meters
- The OUTPUT relay is a signal relay (1A) and can be also configured as NO (default) or NC by a jumper under
- the cover enclosure. It can be configured for different functions
- Real Time Clock/Calendar
- Software upgradeable on-site via Bluetooth® phone (Stand Alone)

V364 **Relay** External Bluetooth® (max 3 meters)

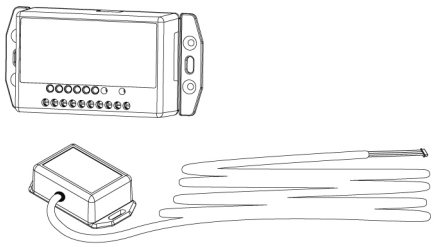

DIMENSIONS
Smart Relay's dimensions:
- Width: 109mm
- Height: 53mm
- Depth: 26 mm

Bluetooth® Antenna's dimensions:
- Width: 65mm
- Height: 35mm
- Depth: 15mm

MATERIAL
Technopolymer

COLOUR
Black

cod. **5E066502**

Technical features

FIRMWARE
1RIS

RELEASE
2.0

POWER UNIT
10÷30 Vdc (2W) 12÷24 Vac (4VA)

HARDWARE SPECIFICATIONS
2 INPUTS: REX (Request to Exit = opening command) and configurable INPUT
2 OUTPUTS: RELAY 5 A and Signal Relay 1 A Configurable

MOUNTING

- Wall mounted
- DIN Rail 35 mounted

WORKING TEMPERATURE
-25°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +70°C

PACKAGE
1 Relay, 1 Plastic pin to setup Programming Mode, 1 DIN rail mounting clip with screws, 1 Bluetooth® remote module with 3 meters cable, 1 Installation guide (EN/IT)

Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
-	•	•	•