1NCA Smart

Cable Free Finger

CABLE FREE RFID AND BLUETOOTH® READER, BATTERY OPERATED, FEATURING A CAPACITIVE NUMERIC KEYBOARD AND A FINGERPRINT READER, CAN BE COUPLED TO ANY ISEO CONNECTED SMART LOCKING DEVICE





A new range of multistandard readers

1NCA Smart Readers is an innovative range of multi-standard, wall-mounted and weatherproof readers of ISEO Connected products line, designed for access management in residential and light commercial buildings. These readers can be easily installed and can manage internal doors but also outdoor gates since they have the IP66 certification.


Elegant in every situation

All 1NCA Smart Readers combine leek and minimalist design with premium and durable materials, which is well suited to different environments. Experience the perfect blend of elegance and reliability, elevating your security measures to new heights and unlocking your freedom to move.

Product features

- The reader can be coupled to any ISEO Connected Smart locking device via Bluetooth®, in order to increase its credential capabilities
- Memorize up to 300 users credentials
- Records the last 1000 events
- Wake up by RFID card detection or phone (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Light and acoustic signals
- Permanently open mode (office mode) without extra battery consumption
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

1NCA Smart Cable Free Finger

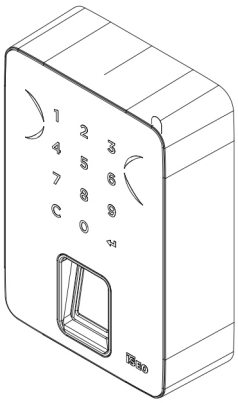

DIMENSIONS
- Height: 120 mm
- Width: 82 mm
- Depth: 35 mm

FINISH
Technopolymer

COLOUR
Glossy black

cod. **5E1511355**

ACCESS CREDENTIALS

- Badge
- Bracelet
- Keyfob
- Smartphone
- Apple Watch
- Numeric Keypad
- Fingerprint

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1

CERTIFICATIONS

- Compliance to RED, European and UK directives concerning radio equipment regulations

Technical features

FIRMWARE
ARGO

POWER UNIT
4 Alkaline AA batteries Max Power consumption 1W
Automatic low power mode max. 0,4mW

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- Led 3-colour series green, red, blue
- Multi-frequency buzzer

MOUNTING

- Wall mounted

ENVIRONMENTAL FEATURES

- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +70°C

PACKAGE
1 reader, 4 Alkaline AA batteries, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25).

Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
●	●	-	-