

Locks for metal frames

Multiblindo Smart 2-8
es. code 7A3E0*-7A3E1*

Multiblindo Emotion 2-20
es. code 7A36*-7A37*

Multiblindo Easy 2-30
es. code 7A39*-7A32*-7A*-1A*

Multiblindo classic 2-60
es. code 7991*-7951*-7955*-7911*

Performa 2-94
es. code 72*

Top Exit 2-136
es. code 707*-717*

Thesis 2.0 2-146
es. code 0750*-0751*-0760*-0780*

Electa 2-184
es. code 785*-781*-783*-782*-743*-713*
711*-714*

ShutterTop 2-218
es. code 7C3*-7C2*

741N - 741A 2-223
es. code 74*N*

Locks for glass doors 2-227
es. code 745*

Locks for metal frames 2-228
es. code 75*-76*-90*-30*

**Mortice locks
for metal frames** 2-236
es. code 96*-98*-55*-704*-70*-71*-72*

**Serie 5
Electric locks** 2-253
es. code 52*-53*-510*-500*-38*

**500
Electric locks** 2-259
es. code 510*-500*-505*

Ferroglietto 2-261
es. code 315*-310*

Portoncino 2-262
es. code 48*-43*

Iron frames and gates 2-264
es. code 66*-120*-14*-15*-77*-504*- 60*
61*-62*-63*

Shutters and garage doors 2-274
es. code 64*-109*

Multi-purpose locks 2-278
es. code 651*-653*

**Locks for
electric cabins** 2-280
es. code 818*-868*

Match 2-290
es. code 56*-040*-033*

Striking plates 2-298
es. code 038*-033*


LEGEND

For aluminium frames

For iron frames

How to read the marking EN12209:2016

Classification of mechanically operated locks, latches and locking plates (single-point locking)

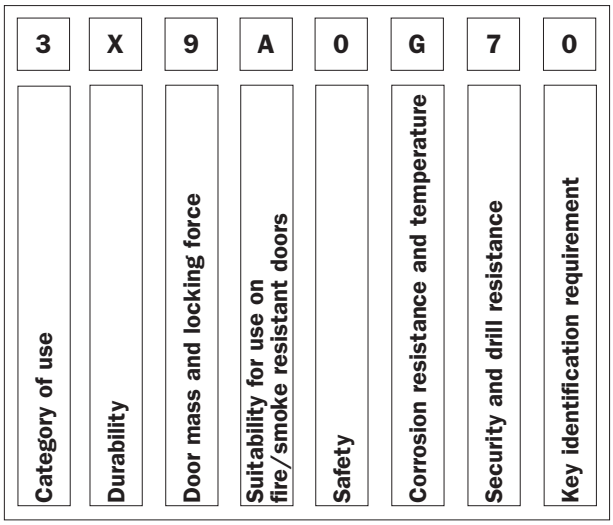

Category of use
There are three grades (example: grade 1 for residential doors, grade 2 for offices doors, grade 3 for doors in public buildings)

Durability
There are eleven grades (example: grade A 50.000 operations and no load on latchbolt
grade X 200.000 operations and 120 N load on latchbolt)

Door mass and locking force
There are ten grades (example: grade 1 up to 100 kg door mass with 50 N maximum locking force,
grade 9 over 200 kg door mass with 15 N maximum locking force)

Suitability for use on fire/smoke resistant doors
There are four grades (example: grade 0 non suitable for use on fire/smoke resistant doors, grade B suitable for use on fire/smoke resistant doors, grade N suitable for use on groups of fire/smoke resistant doors, based on tests in which the lock does not help to keep the door in the closed position during the fire and/or smoke test)

Safety
There is only one grade: grade 0 no safety requirement

Corrosion resistance and temperature
There are six grades (example: grade 0 no corrosion resistance and no temperature requirement,
grade G very high corrosion resistance 240 hours at NSS and temperature from -10°C a +60°C)


Security and drill resistance
There are eight grades (example: grade 0: minimum security and no drill resistance,
grade 7 very high security and drill resistance)

Key identification requirements
There are nine grades (example: grade 0 no requirement, grade H minimum eight sealing elements,
extended number of effective encryptions)

For further information please refer to EN 12209:16 standard

How to read the marking pr EN15685:2022

Classification of mechanically operated multipoint locks and locking plates (multipoint locking)

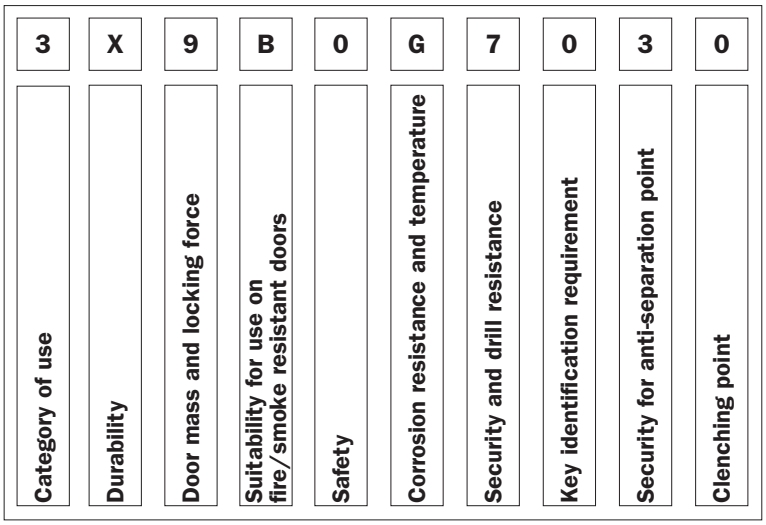

Category of use
There are three grades (example: grade 1 for residential doors, grade 2 for offices doors, grade 3 for doors in public building)

Durability
There are eleven grades (example: grade A 50.000 operations and no load on latchbolt for locks without latchbolt, grade X 200.000 operations and 120 N load on latchbolt)

Door mass and locking force
There are ten grades (example: grade 1 up to 100 kg door mass and 50 N maximum locking force, grade 9 over 200 kg door mass and 15 N maximum locking force)

Suitability for use on fire/smoke resistant doors
There are four grades (example: grade 0 non suitable for use on fire/smoke resistant doors, grade B suitable for use on fire/smoke resistant doors, grade N suitable for use on groups of fire/smoke resistant doors, based on tests in which the lock does not help to keep the door in the closed position during the fire and/or smoke test)

Safety
There is only one grade: grade 0 no safety requirement

Corrosion resistance and temperature
There are fifteen grades (example: grade 0 no corrosion resistance and no temperature requirement, grade M very high corrosion resistance 240 hours at NSS and temperature from -25°C to +70°C)

Security and drill resistance
There are eight grades (example: grade 0 minimum security and no drill resistance, grade 7 very high security and drill resistance)

Key identification requirement
There are nine grades (example: grade 0 no requirements, grade H minimum eight detaining elements, extended number of effective differs)


Security for anti-separation point
There are eight grades (example: grade 0 no declared anti-separation point, grade 7 very high performance with drill resistance)

Clenching point
There are five grades (example: grade 0 no clenching force requirements, grade 4 clenching force = 120 N)

For further information please refer to pr EN15685:2022

How to read the marking EN14846:2008

Classification electromechanically operated locks and strike plates (single point and multipoint locking)

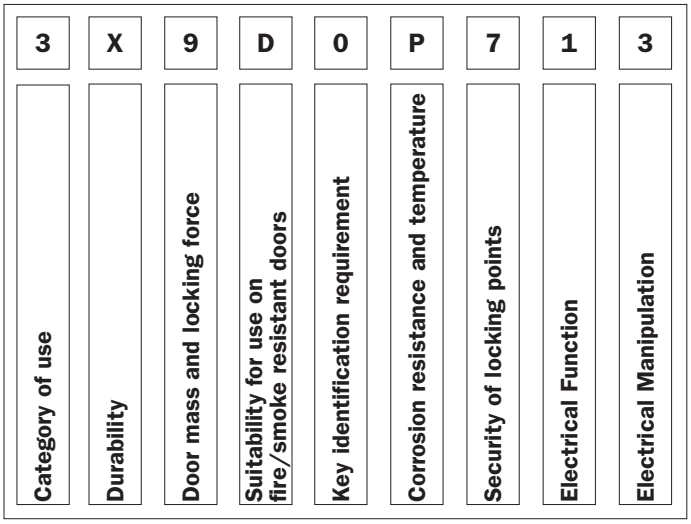

Category of use
There are three grades (example: grade 1 for residential doors, grade 2 for offices doors, grade 3 for doors in public buildings)

Durability
There are ten grades (example: grade A 50.000 operations and no load on latchbolt
grade Z 500.000 operations and 120 N load on latchbolt)

Door mass and locking force
There are ten grades (example: grade 1 up to 100 kg door mass with 50 N maximum locking force,
grade 9 over 200 kg door mass with 15 N maximum locking force)

Suitability for use on fire/smoke resistant doors
There are seven grades (example: grade 0 non suitable for use on fire/smoke resistant doors,
grade F suitable for use on fire/smoke resistant doors, with a classification time of EI 120 min. or greater)

Key identification requirement
There are nine grades (example: grade 0 no requirements, grade H minimum eight detaining elements,
extended number of effective differs)


Corrosion resistance and temperature
There are eight grades (example: grade 0 no corrosion resistance and no temperature requirement,
grade G very high corrosion resistance and temperature from -25°C to +70°C)

Security of locking points
Eight grades are identified (example: grade 0 no security requirement, grade 7 very high security with drilling resistance)

Electrical Function
Eight grades are identified (example: grade 0 no anti-separation point, grade 7 very high security with drilling resistance)

Electrical Manipulation
Five grades are identified (example: grade 0: not applicable, grade 4 crushing force = 120 N)

For further information please refer to EN14846:2008 standard

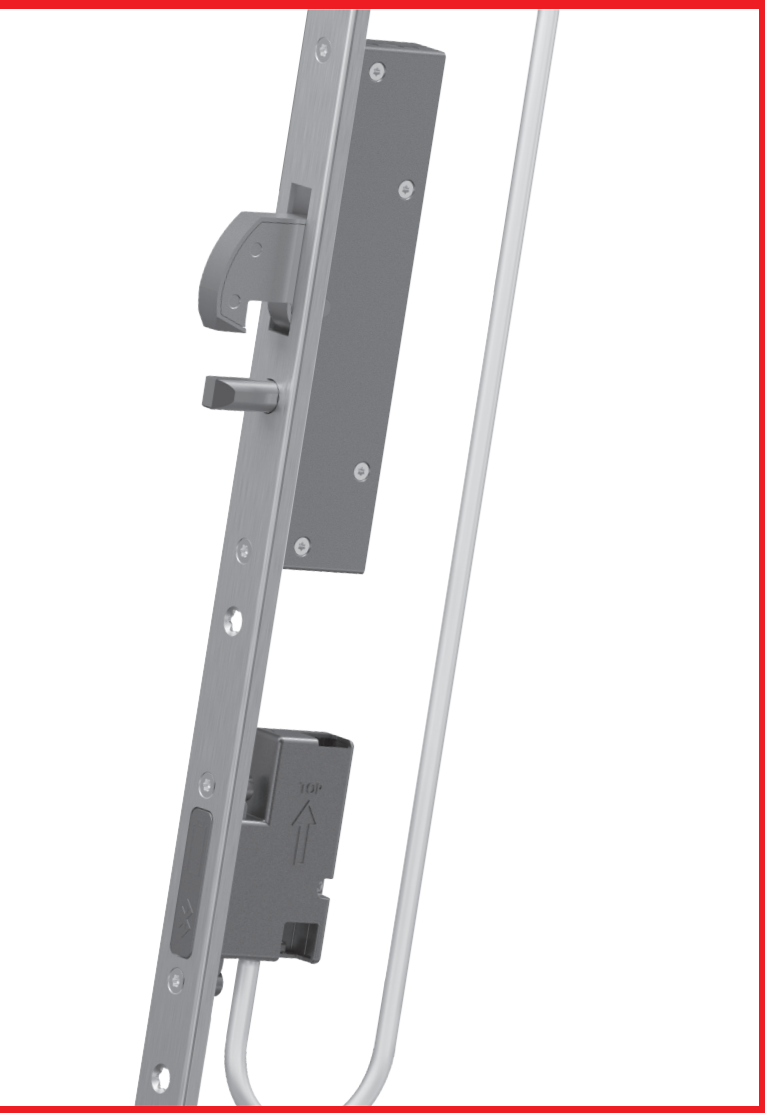

Multiblindo Smart

Connected, motorized and self-locking lock

Multiblindo Smart

Perfect combination of ease of use and security in all situations. The new motorized self-locking lock represents the electronic evolution of Multiblindo Emotion in the world of connected products.
The lock is equipped with a panic function for the opening of emergency doors, in combination with an emergency operation bar. From the outside, the Multiblindo Smart can be operated without a key, using the latest electronic access control systems by ISEO. It is compatible with push-button, RFID and fingerprint readers, or can be controlled remotely via smartphone using the ARGO App. The great innovation of the Multiblindo Smart is the possibility to choose the power supply for the lock: it can be powered via the traditional mains cable - combined with a backup battery that activates in in the event of a power failure - or alternatively, fully battery-operated.
From the inside it operates electronically in a simple and quick manner using a standard keypad. Furthermore, same as with the Multiblindo Emotion, it is always possible to programme the lock according to the customer's choice: Total, Light, Free.
Multiblindo Smart ensures top-level protection against intrusion attempts, it doesn't lose the settings in case of a blackout: the mechanical action of the key and handle is always guaranteed, allowing manual operation if necessary.

Connected and Monitoring functions

In combination with 1NCA readers and using the ARGO app, access can be managed intuitively and securely, allowing real-time monitoring with simplicity.



Time Customisation

The reclosing time is also customizable: the user, according to his needs, can decide how much time will lapse between the opening impulse and the automatic reclosing of the door.

Multiblindo Smart has three options allowing an instant opening as well as to choose the automatic re-locking mode according to the user's security requirements in a specific moment. The type of locking can then be managed by operating an electronic control that allows the setting of functions:

Total. Through an electrical impulse from an access control device or a simple button, the door opens and providing an audible feedback. When the door is closed again, Multiblindo Smart triggers the latch inside the strike plate and automatically arms the deadbolts: the audible signal will indicate of total closure. Total security: no one can enter until the button button is pressed again.

Light. Activating the electrical impulse opens the door, providing an audible feedback. When it closes again, Multiblindo Smart will automatically trigger only the latch inside the counterplate. Flexible security: partial and rapid closing of the door.

Free. With this setting, Multiblindo Smart keeps the latchbolt and deadbolts completely unlocked: the door will stay in a free-opening state, in the classic hold-open situation.
Total freedom ensuring a free access both from inside and outside until a new setting is applied.

Multiblindo Smart

It's certified

EN 14846:08 - Multiblindo Smart

3	X	9	F	0	P	7	1	3

EN 14846:08 - Multiblindo Smart + Extension

3	X	6	A	0	P	7	1	3

EN 179:08 - Multiblindo Smart + Lever handle

3	7	7	B	1	4	5	2	A	B

EN 179:08 - Multiblindo Smart + Extension + Lever handle

3	7	7	A	1	3	5	2	A	A/B


EN 1125:08 - Multiblindo Smart + Pro EXIT

3	7	7	B	1	4	2	1	A	B

EN 1125:08 - Multiblindo Smart + Extension + Pro EXIT


3	7	7	A	1	3	2	1	A	A/B


Doors opening direction.

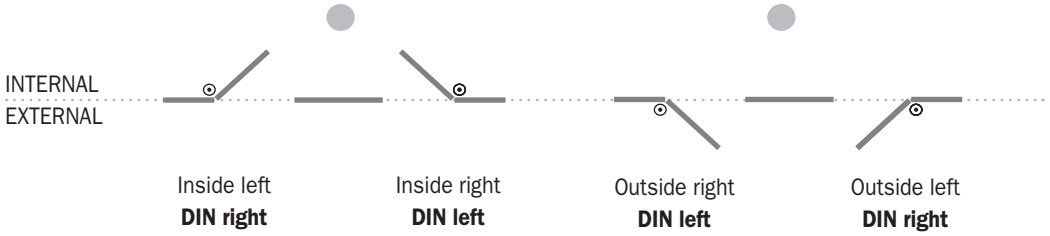

CSI

Multiblindo Smart



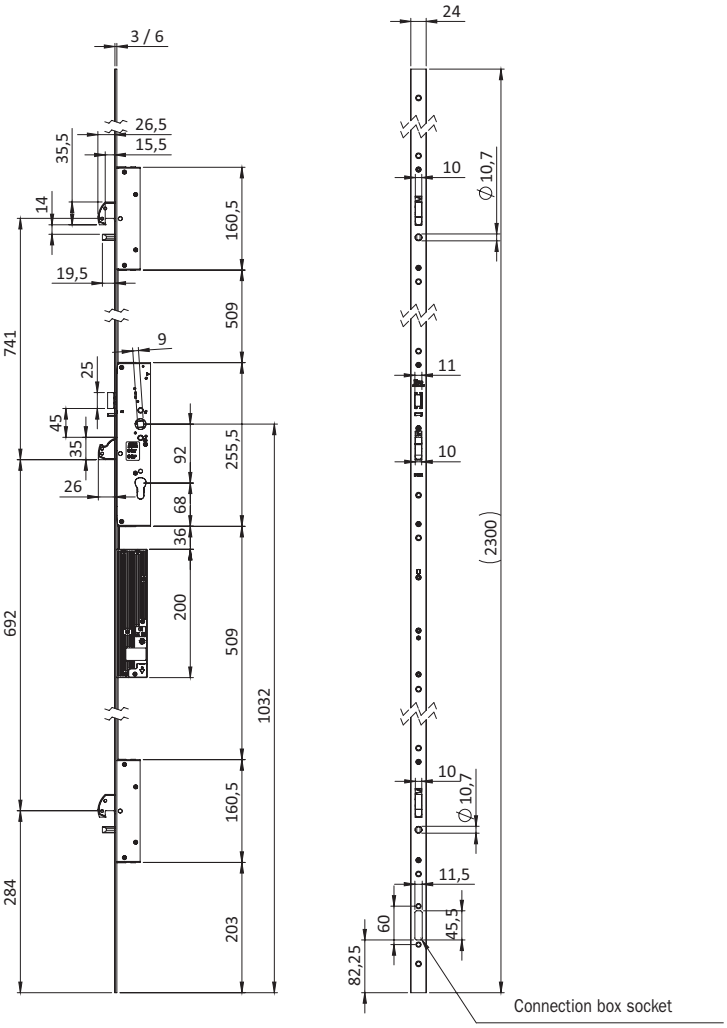

Electromechanical **24vdc** multipoint mortice lock for metal frames, self-locking latchbolt and 3 deadbolts, **rotating hook deviators and pin.** Central lock, centre distances 92 mm, operating with European profile cylinder. Right or left latchbolt, **non reversible**. Deadbolts and latchbolt operated by key, handle or motor. Lock and deviators deadbolts 27 mm throw, with anti-drill and anti-cut cover plates in hardened steel. Adapter for 8 mm square handle, 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Matching accessories:
Cable for PWW and BKW configurations 7A0E200
Cable for PWF and BKF configurations 7A0E210
Cable for PWF+R and BKF+R configurations 7A0E220
Cable for PWW+R and BKW+R configurations 7A0E230
Cable for PWN BKN ATLAS V364 configurations 7A0E240
Connection box Bluetooth® Low energy 5.1 main power supply 7A0E110
Connection box, main power supply 7A0E120
Connection box Bluetooth® Low energy 5.1 battery 7A0E130
Connection box, battery 7A0E140
Single holder for batteries + cable 7A0E300
Double holder for batteries + cables 7A0E310

Extension for U front plate
Version with latch bolt deviator for fourth locking point 7AX100002
Version with latch bolt deviator and M8 rod preparation and ferrule for fifth locking point 7AX200002 (not suitable to be used on emergency or panic doors)

Extension for flat front plate
Version with latch bolt deviator for fourth locking point 7AX100002
Version with latch bolt deviator and M8 rod preparation and ferrule for fifth locking point 7AX200002 (not suitable to be used on emergency or panic doors)

Strike plates for U front plate
Long mechanical strike plates 032600 - 032601
Long mechanical strike plates for semi-fixed secondary leaf 032608 - 032610
Mechanical strike plates 033232 - 033233
Strike plates for deviators 033167 - 033171
Strike plates for Extensions 24X6X180 033107
Long mechanical strike plates for Extensions 032620
Long mechanical strike plates for Extensions semi-fixed secondary leaf 032624 - 032626

Strike plates for flat front plate
Long mechanical strike plates 032602 - 032603
Long mechanical strike plates for semi-fixed secondary leaf 032616 - 032617
Mechanical strike plates 033230 - 033231
Strike plates for deviators 033165 - 033169
Strike plates for Extensions 24X3X180 033108
Long mechanical strike plates for Extensions 032621

Configuration

The Multiblindo Smart features a modular design that allows for adaptation to various installation requirements and user needs. It is possible to configure the following combinations:

Power supply



Powered by 24Vdc

Powered from an external 24Vdc power supply connected to mains



Powered by 24Vdc with backup batteries

Powered from an external 24Vdc power supply connected to mains and in addition on the door there is a battery pack (9 Alkaline AA) as backup, in case of mains power failure (black-out), the lock will continue to work.



Full Battery

No cabling is necessary for external power supply. The lock is powered from two battery packs (9 Alkaline AA each) installed on the door.

1NCA Smart Reader



1NCA Smart Cable Free



1NCA Smart Standard 485



1NCA Smart Mullion 485

only for PWW PWW+R

No Reader

It is still possible to manage the lock with the ARGO App from a smartphone.


Output relay

Cable with output relay in order to get the door status or manage an automatic door operator


Configuration

The e-CATALOG Connected Smart allows to select the desired configuration for the Multiblindo Smart and to define the components required and the connections.


Configuration flow

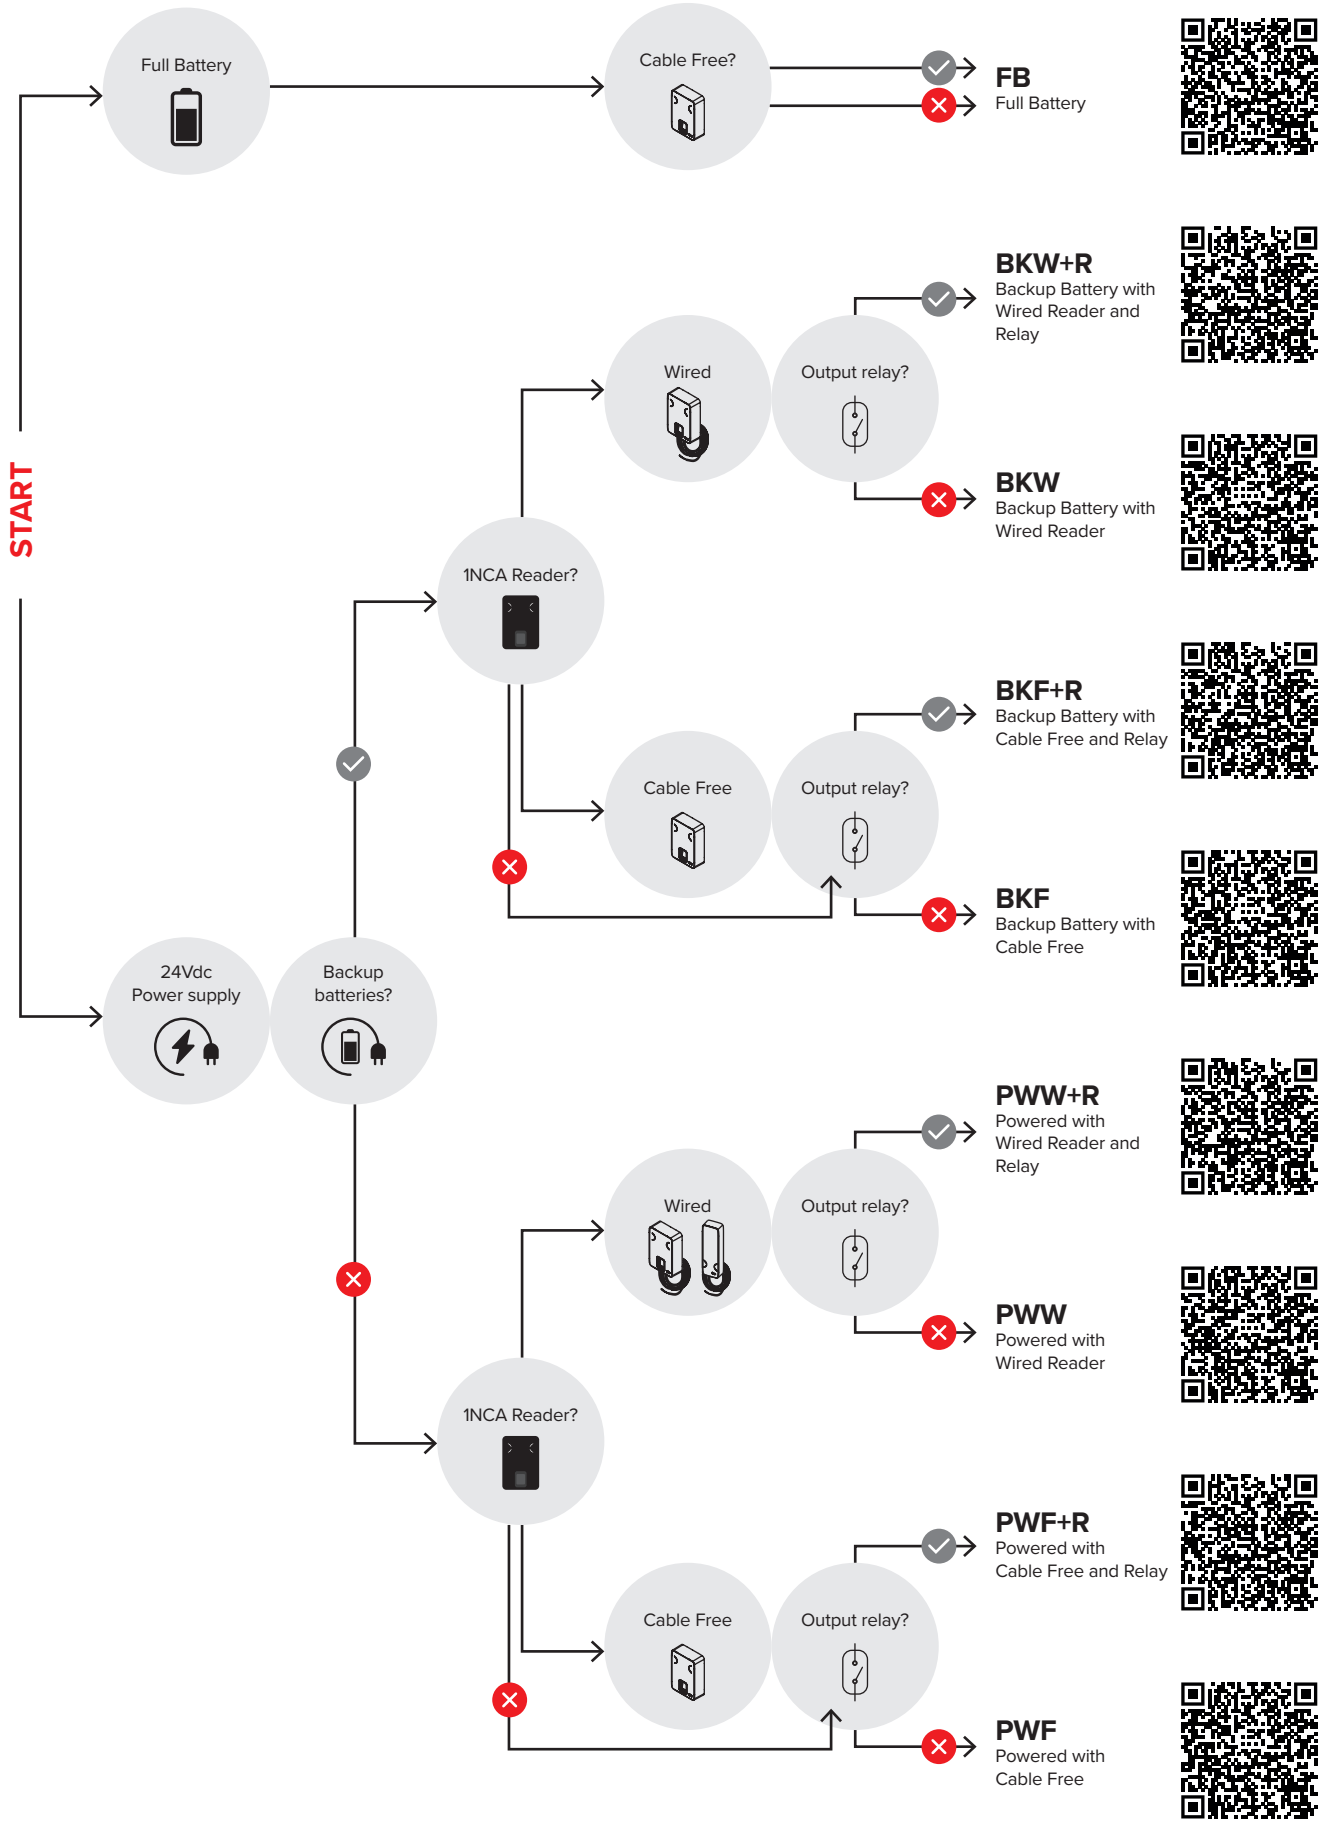

Multiblindo Smart



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3E003525D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3E004025D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3E004525D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3E005025D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A3E005525D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3E006025D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3E006525D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3E003525S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3E004025S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3E004525S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3E005025S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3E005525S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3E006025S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3E006525S**	1	-	1





	Code	Single package	Multiple package	Min. ord.
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3E103525D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3E104025D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3E104525D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3E105025D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A3E105525D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3E106025D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3E106525D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3E103525S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3E104025S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3E104525S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3E105025S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3E105525S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3E106025S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3E106525S**	1	-	1

	Code	Single package	Multiple package	Min. ord.

Multiblindo Smart

PWF
PWF+R




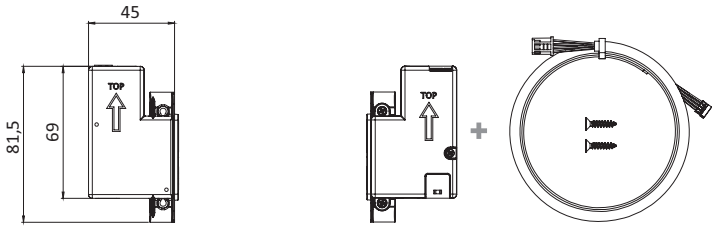

CONNECTION BOX FOR EXTERNAL 24Vdc POWER SUPPLY, WITH BLUETOOTH®
Used in Multiblindo Smart configurations **Powered by 24Vdc with Cable Free reader (PWF) and Powered by 24Vdc with Cable Free reader and output relay (PWF+R).**
Package: 1 Connection Box, 1 cable, instruction manual. **7A0E110** 1 - 1

PWW
PWW+R



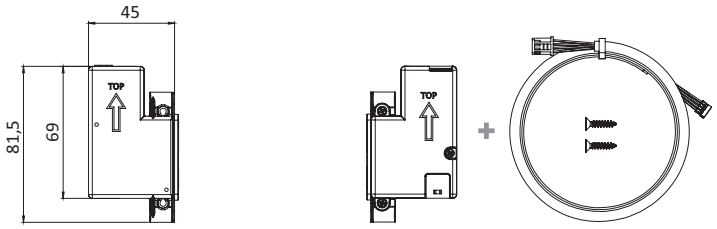



CONNECTION BOX FOR EXTERNAL WIRED POWER SUPPLY, WITHOUT BLUETOOTH®
Used in Multiblindo Smart configurations **Powered by 24Vdc with wired reader (PWW) and Powered by 24Vdc with wired reader and output relay (PWW+R).**
Package: 1 Connection Box, 1 cable, instruction manual. **7A0E120** 1 - 1

Multiblindo Smart

	Code	Single package	Multiple package	Min. ord.


BKF
BKF+R
FB




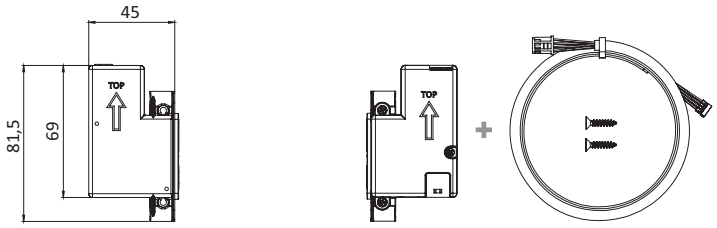

CONNECTION BOX FOR CONFIGURATION WITH BACKUP BATTERIES, WITH BLUETOOTH®
Used in Multiblindo Smart configurations **Powered by 24Vdc with backup batteries and Cable Free reader (BKF), Powered by 24Vdc with backup batteries, Cable Free reader and Relay (BKF+R) and Full Battery (FB), version** without external 24Vdc power supply.
Package: 1 Connection Box, 1 cable, instruction manual. **7A0E130** 1 - 1





BKW
BKW+R



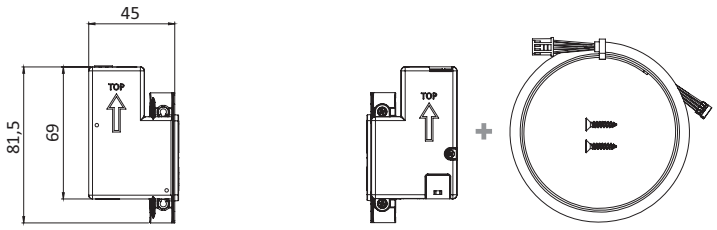


CONNECTION BOX FOR CONFIGURATION WITH BACKUP BATTERIES, WITHOUT BLUETOOTH®
Used in Multiblindo Smart configurations **Powered by 24Vdc with backup batteries and wired reader (BKW) and Powered by 24Vdc with backup batteries, wired reader and output relay (BKW+R).**
Package: 1 Connection Box, 1 cable, instruction manual. **7A0E140** 1 - 1

Multiblindo Smart


	Code	Single package	Multiple package	Min. ord.
 6-WIRE CONNECTION CABLE FOR MULTBILINDO SMART Used in Multiblindo Smart configurations **Powered by 24Vdc with wired reader (PWW) and Powered by 24Vdc with backup batteries with wired reader (BKW).** Package: 1 Connection Cable	**7A0E200**	1	-	1
 4-WIRE CONNECTION CABLE FOR MULTBILINDO SMART Used in Multiblindo Smart configurations **Powered by 24Vdc with Cable Free reader (PWF) and Powered by 24Vdc with backup batteries with Cable Free reader (BKF).** Package: 1 Connection Cable	**7A0E210**	1	-	1
 6-WIRE CONNECTION CABLE FOR MULTBILINDO SMART Used in Multiblindo Smart configurations **Powered by 24Vdc with Cable Free reader and output relay (PWF+R) and Powered by 24Vdc with backup batteries, Cable Free reader and output relay (BKF+R)** Package: 1 Connection Cable	**7A0E220**	1	-	1
 8-WIRE CONNECTION CABLE FOR MULTBILINDO SMART Used in Multiblindo Smart configurations **Powered by 24Vdc with wired reader and output relay (PWF+R) and Powered by 24Vdc with backup batteries, wired reader and output relay (BKF+R** Package: 1 Connection Cable	**7A0E230**	1	-	1

Multiblindo Smart


	Code	Single package	Multiple package	Min. ord.

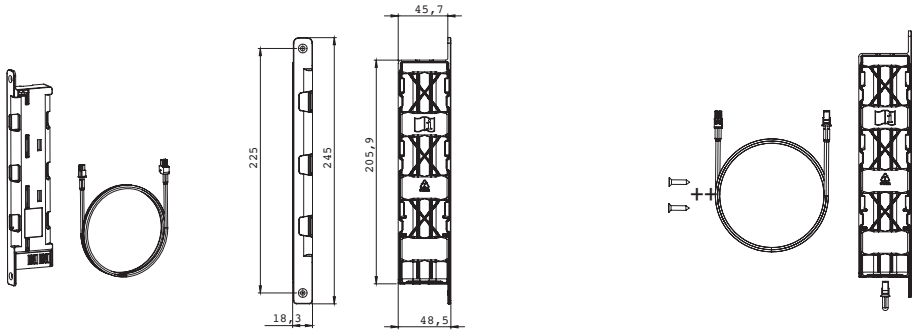

SINGLE BATTERY HOLDER + CONNECTION CABLE
Single battery holder in black nylon for 9 type AA batteries.
Compatible with MULTIBLINDO SMART, supplied with connection cable.
(batteries not provided).
Package: 1 Battery holder, 1 connection cable **7A0E300** 1 - 1



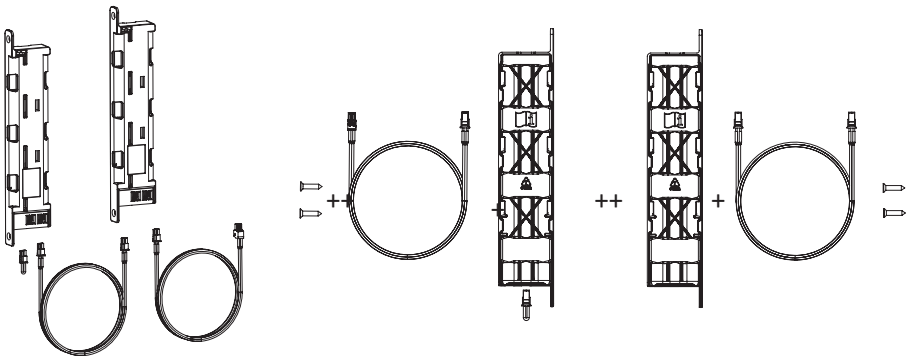


DOUBLE BATTERY HOLDER + CONNECTION CABLES
Double battery holder in black nylon for 9x2 type AA batteries.
Compatible with MULTIBLINDO SMART, supplied with connection cables.
(batteries not provided).
Package: 2 Battery holder, 2 connection cable **7A0E310** 1 - 1



PACKAGE 9 BATTERIES
Duracell Procell AA alkaline battery **7A0E320** 1 - 1

Multiblindo Smart

	Code	Single package	Multiple package	Min. ord.
 POWER SUPPLY UNIT 24Vdc - 70W Input 120-230Vac. Output 24Vdc 3A. DIN35 rail mounting. Package: 1 Power Supply, instruction manual	**5E3502**	1	-	1
 FLEXIBLE CABLE FOR RIM MOUNTING, EXTERNAL Length 300 mm, for opening up to 180°	**94403010E**	1	-	1
FLEXIBLE CABLE FOR RIM MOUNTING, EXTERNAL Length 290 mm, for opening up to 90°	**94403110E**	1	-	1
 STAINLESS STEEL PLATE FOR MAGNET HOLDER with flat front plate - dimensions 24X3 mm	**033103**	1	-	1
 STAINLESS STEEL PLATE FOR MAGNET HOLDER with U-shaped front plate - dimensions 24X6 mm	**033104**	1	-	1



Multiblindo Emotion

Electromechanical self-locking lock

Multiblindo Emotion

Perfect combination of comfort and security in any situations.
The new electromechanical self-locking lock represents the electronic evolution of Multiblindo Easy.
From the outside it operates by the most advanced electronic access control systems available on the market, or by the key.
From the inside it operates electronically in a simple and quick way through a normal keyboard, allowing to set three different locking functions according to the needs of the customer: Total, Light, Free.
Multiblindo Emotion ensures top-level protection against intrusion attempts, it doesn't lose the settings in case of a blackout: the mechanical action of the key and handle is always guaranteed, so it can be operated manually if necessary.

It is certified

EN14846:08 - Multiblindo Emotion

3	X	9	F	0	P	7	1	3

EN14846:08 - Multiblindo Emotion + Extension

3	X	6	A	0	P	7	1	3

Ringing feedback

It is always possible to check the status of the door through a special device which sends acoustic signals when the user opens or closes the gate; the acoustic signals can be always scheduled by the user, who can also prefers to completely exclude them.



Set your time

The re-closing time is also customisable: the user, according to his needs, can decide how much time will pass between the opening impulse and the automatic re-closing of the lock, if the door is not open.

Multiblindo Emotion has three options allowing an instant opening as well as to choose the automatic re-locking mode according to the user's security requirements in a specific moment. The type of locking can then be managed by operating an electronic control that allows the setting of functions:


Total. Through an electrical impulse from an access control device or a simple button, the door opens and gives a ringing feedback. When the door is closed again, Multiblindo Emotion triggers the latch inside the strike plate and automatically arms the deadbolts: the audible signal will warn of total closure. Total security: no one can enter until the button button is pressed again.

Light. Activating the electrical impulse opens the door, giving a ringing feedback. When it closes again, Multiblindo Emotion will automatically trigger only the latch inside the counterplate.
Flexible security: partial and fast closing of the door.

Free. With this setting, Multiblindo Emotion keeps the latchbolt and deadbolts completely unlocked: the door will stay in a free-opening status, in the classic hold-open situation.
Total freedom ensuring a free access both from inside and outside until a new setting is given.


Multiblindo Emotion


Doors opening direction.

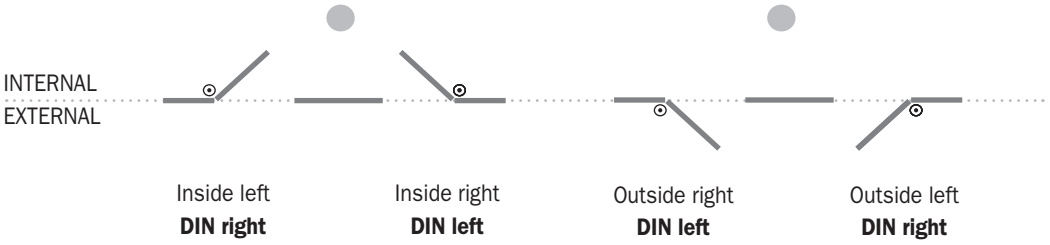


CSI


Multiblindo Emotion 92 mm centre distance

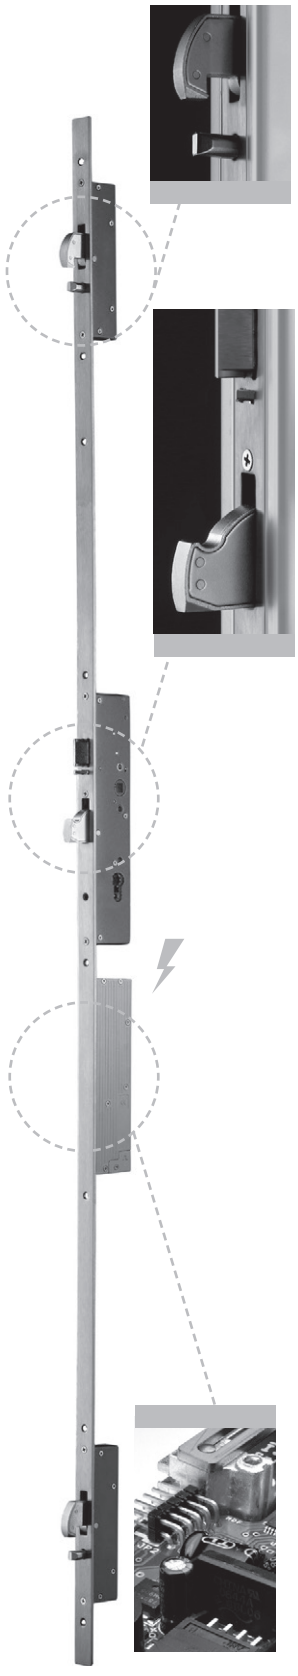

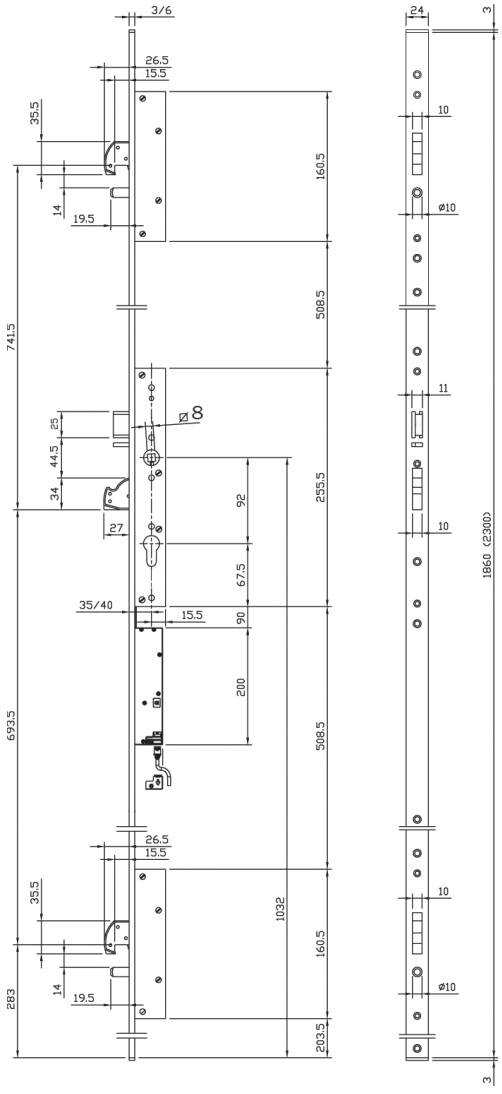

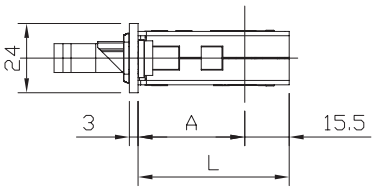

BACKSET	A	L
35	32	47.5
40	37	52.5
45	42	57.5
50	47	62.5
55	52	67.5
60	57	72.5
65	62	77.5

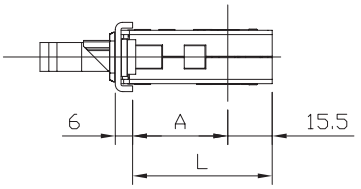

BACKSET	A	L
35	28	43.5
40	33	48.5
45	38	53.5
50	43	58.5
55	48	63.5
60	53	68.5
65	58	73.5

Electromechanical 12vdc multipoint mortice lock for metal frames, self-locking latchbolt and 3 deadbolts, **rotating hook deviators and pin**. Central lock, centre distances 92 mm, operating with European profile cylinder. Right or left latchbolt, **non reversible**. Deadbolts and latchbolt operated by key, handle or motor. Lock and deviators deadbolts 27 mm throw, with anti-drill and anti-cut cover plates in hardened steel. 6 mt connection cable, 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Matching accessories:


Extension for **U front plate**
Version with latch bolt deviator for fourth locking point 7AX100002
Version with latch bolt deviator and M8 rod preparation and ferrule for fifth locking point 7AX200002

Strike plates for **U front plate**
Long mechanical strike plates 032600 - 032601
Long mechanical strike plates for semi-fixed secondary leaf 032608 - 032610
Mechanical strike plates 033232 - 033233
Strike plates for deviators 033167 - 033171
Strike plates for Extensions 24X6X180 033107
Long mechanical strike plates for Extensions 032620
Long mechanical strike plates for Extensions semi-fixed secondary leaf 032624 - 032626


Extension for **flat front plate**
Version with latch bolt deviator for fourth locking point 7AX100002
Version with latch bolt deviator and M8 rod preparation and ferrule for fifth locking point 7AX200002

Strike plates for **flat front plate**
Long mechanical strike plates 032602 - 032603
Long mechanical strike plates for semi-fixed secondary leaf 032616 - 032617
Mechanical striker 033230 - 033231
Strike plates for deviators 033165 - 033169
Strike plates for Extensions 24X3X180 033108
Long mechanical strike plates for Extensions 032621

Multiblindo Emotion 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3600352.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3600402.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3600452.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3600502.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A3600552.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3600602.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3600652.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3600352.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3600402.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3600452.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3600502.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3600552.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3600602.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3600652.S**	1	-	1




Flat front plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3610352.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3610402.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3610452.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3610502.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A3610552.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3610602.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3610652.D**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3610352.S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3610402.S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3610452.S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3610502.S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3610552.S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3610602.S**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3610652.S**	1	-	1



Power supply **230Vac - 12Vdc - 3A**	**94403000E**	1	-	1



External soft cable tube L=300 - opening up to 180°	**94403010E**	1	-	1



Built-in soft cable tube L=260 - opening up to 90°	**94403110E**	1	-	1

Multiblindo Emotion EXIT

The new electromechanical self-locking lock Multiblindo Emotion EXIT with panic function has got the same features as the Multiblindo Emotion lock and in addition it has an emergency door opening function (which works in combination with panic bar or panic handle).
From the outside it operates by key or the most advanced electronic access control systems available on the market.
From the inside it operates electronically in a simple and quick way through a normal keyboard, allowing to set three different locking functions according to the needs of the customer: Total, Light, Free. The deadbolts and latchbolt are always operated by the panic bar.



Pro EXIT **panic bar**

Operating bar on which a microswitch can be applied. It detects the emergency opening.
With AntiGerm antibacterial protection.

It is certified

EN14846:08 - Multiblindo Emotion EXIT

3	X	9	F	0	P	7	1	3

EN14846:08 - Multiblindo Emotion EXIT + Extension

3	X	6	A	0	P	7	1	3

EN179:08 - Multiblindo Emotion EXIT + Lever handle

3	7	7	B	1	4	5	2	A	B

EN179:08 - Multiblindo Emotion EXIT + Extension + Lever handle

3	7	7	A	1	3	5	2	A	A/B

EN1125:08 - Multiblindo Emotion EXIT + Pro EXIT

3	7	7	B	1	4	2	1	A	B

EN1125:08 - Multiblindo Emotion EXIT + Extension + Pro EXIT

3	7	7	A	1	3	2	1	A	A/B

Multiblindo Emotion EXIT



Set your time

The re-closing time is also customisable: the user, according to his needs, can decide how much time will pass between the opening impulse and the automatic re-closing of the door.


Multiblindo Emotion EXIT has three options allowing an instant opening as well as to choose the automatic re-locking mode according to the user's security requirements in a specific moment. The type of locking can then be managed by operating an electronic control that allows the setting of functions:


Total. Through an electrical impulse from an access control device or a simple button, the door opens and gives a ringing feedback. When the door is closed again, Multiblindo Emotion triggers the latch inside the strike plate and automatically arms the deadbolts: the audible signal will warn of total closure. Total security: no one can enter until the button button is pressed again.


Light. Activating the electrical impulse opens the door, giving a ringing feedback. When it closes again, Multiblindo Emotion will automatically trigger only the latch inside the counterplate.
Flexible security: partial and fast closing of the door.

Free. With this setting, Multiblindo Emotion keeps the latchbolt and deadbolts completely unlocked: the door will stay in a free-opening status, in the classic hold-open situation.
Total freedom ensuring a free access both from inside and outside until a new setting is given.


Multiblindo Emotion EXIT 92 mm centre distance

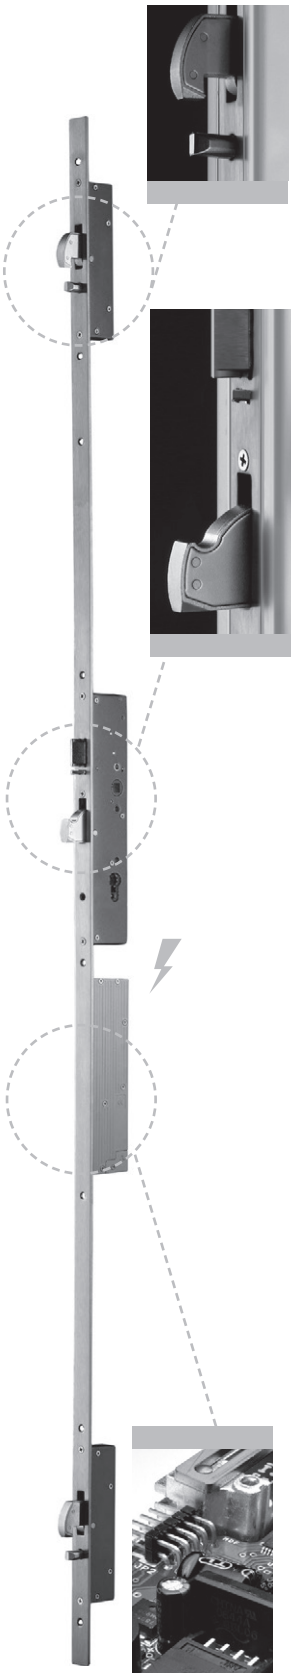

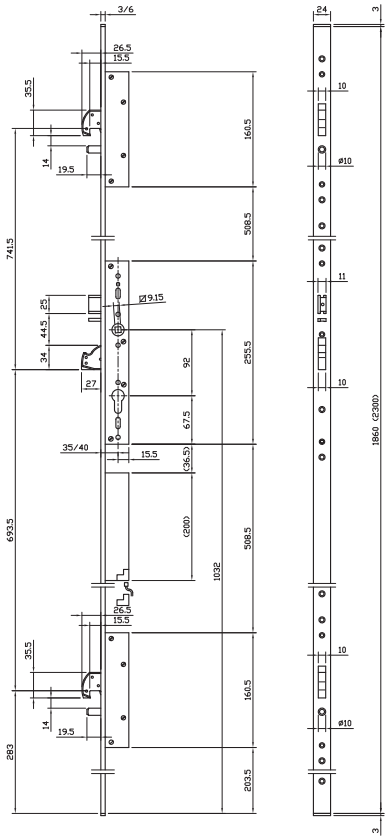


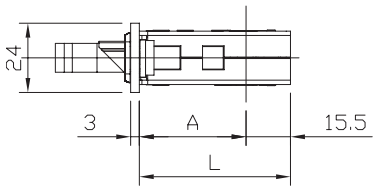

BACKSET	A	L
35	32	47.5
40	37	52.5
45	42	57.5
50	47	62.5
55	52	67.5
60	57	72.5
65	62	77.5

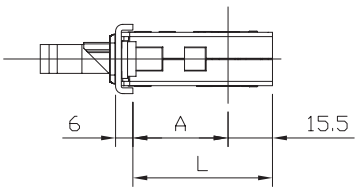

BACKSET	A	L
35	28	43.5
40	33	48.5
45	38	53.5
50	43	58.5
55	48	63.5
60	53	68.5
65	58	73.5

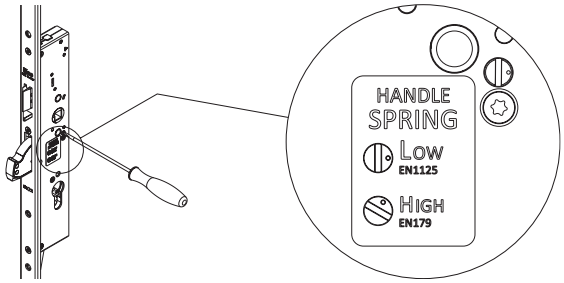

Multiblindo Emotion EXIT with panic function is operated by an horizontal bar and is composed by the motorised multipoint Multiblindo Emotion **12vdc** mortise door lock for metal frames and the with corresponding strike plates and the the operating bar Pro EXIT or panic handle. It has self-locking latch and 3 deadbolts, **round-hook deviators**. With microswitch detects and signals the deadbolt status (armed deadbolts). Central lock, centre distance 92 mm, operating with European profile cylinder. Right or left latchbolt, **non reversible**. Deadbolts and latchbolt operated by key, handle or motor. Lock and deviators deadbolts 27 mm throw, with anti-drill and anti-cut cover plates in carbonitrided steel. 6 mt connection cable, 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Matching accessories:


Extension for U front plate
Version with latch bolt deviator for fourth locking point
7AX100002

Strike plates for U front plate
Long mechanical strike plates 032600 - 032601
Long mechanical strike plates for semi-fixed secondary leaf 032608 - 032610
Mechanical strike plates 033232 - 033233
Strike plates for deviators 033167 - 033171
Strike plates for Extensions 24X6X180 033107
Long mechanical strike plates for Extensions 032620
Long mechanical strike plates for Extensions semi-fixed secondary leaf 032624 - 032626


Extension for flat front plate
Version with latch bolt deviator for fourth locking point
7AX100002

Strike plates for flat front plate
Long mechanical strike plates 032602 - 032603
Long mechanical strike plates for semi-fixed secondary leaf 032616 - 032617
Mechanical striker 033230 - 033231
Strike plates for deviators 033165 - 033169
Strike plates for Extensions 24X3X180 033108
Long mechanical strike plates for Extensions 032621

Multiblindo Emotion EXIT 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A37003521D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A37004021D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A37004521D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A37005021D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A37005521D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A37006021D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A37006521D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN LEFT**	**7A37003521S.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN LEFT**	**7A37004021S.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN LEFT**	**7A37004521S.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN LEFT**	**7A37005021S.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN LEFT**	**7A37005521S.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN LEFT**	**7A37006021S.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN LEFT**	**7A37006521S.A.1**	1	-	1



Flat front plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A37103521D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A37104021D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A37104521D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A37105021D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A37105521D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A37106021D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A37106521D.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN LEFT**	**7A37103521S.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN LEFT**	**7A37104021S.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN LEFT**	**7A37104521S.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN LEFT**	**7A37105021S.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN LEFT**	**7A37105521S.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN LEFT**	**7A37106021S.A.1**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN LEFT**	**7A37106521S.A.1**	1	-	1



Multiblindo Easy

Self-locking lock

Multiblindo Easy

It is a Multiblindo by all means: same sizes and dimensions, same security level. But it is an all-new Multiblindo, **conceived with 3 different locking functions which can be set by the user**.
To use Multiblindo Easy there is the need to apply an external fixed knob or a pull handle or a panic bar; as a matter of fact, a "classic handle" would unlock the door.

It is certified

pr EN15685:22 - Multiblindo Easy

3	X	9	B	0	G	7	0	3	0

pr EN15685:22 - Multiblindo Easy + Extension

3	X	6	A	0	F	7	0	3	0











Locking

The lock is self-locking: by closing the leaf, the lock engages the deadbolts and the latches automatically.
The end user can change anytime the re-closing settings by switching the mechanical selector placed on the lock front plate. A specific high performance patented system allows the operation of the bolts only when the latch is engaged in the strike plate by at least 3 mm. The latchbolt aligns perfectly the leaf to the door jamb; this operation ensures the best condition for the free movement of the deadbolts.

Opening

Outside opening: the deadbolts are unlocked with a single turn of the key in the opening direction; the latchbolt is unlocked with a further ¼ turn.
Inside opening: the deadbolts are unlocked with a single turn of the key in the opening direction; the latchbolt is unlocked with a further ¼ turn. Latchbolt and deadbolts are unlocked with 45° lever rotation.

Handle exclusion

The lever operation inside is blocked with a single turn of the key in the closing direction.
The operation is restored with single turn of key in the opposite direction. To avoid incorrect or accidental use, the lever block operation is only allowed when the deadbolts are completely locked.
This also ensures that:

- deadbolts self-locking is fully completed.
- the operation of the deadbolts is locked in the secure closed position of the leaf. (Any attack on one deadbolt has no effect on the others, which are independent of the attack).

From a security point of view, the exclusion of handle operation is intended to prevent opening from the inside, or from the outside in the event of a possible break-in on the door (e.g. in the case of breakage of the glass).
In terms of safety it ensures a better exit control.


Total "0" **Deadbolts and latchbolt automatic locking**

Light "1" **Locking by latchbolt only**

Free "2" **Setting without locking** (it allows to set the hold-open function)

Multiblindo Easy


Doors opening direction.

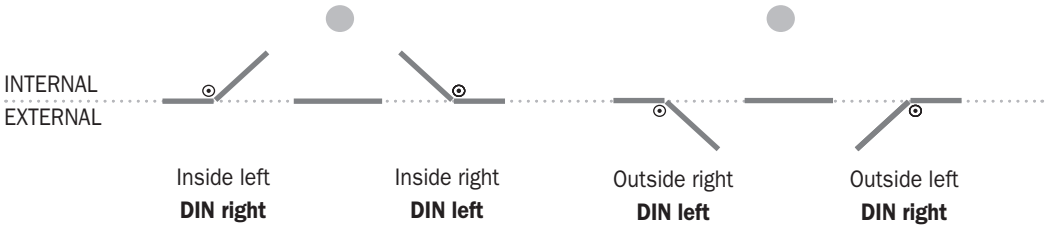


CSI


Multiblindo Easy 92 mm centre distance



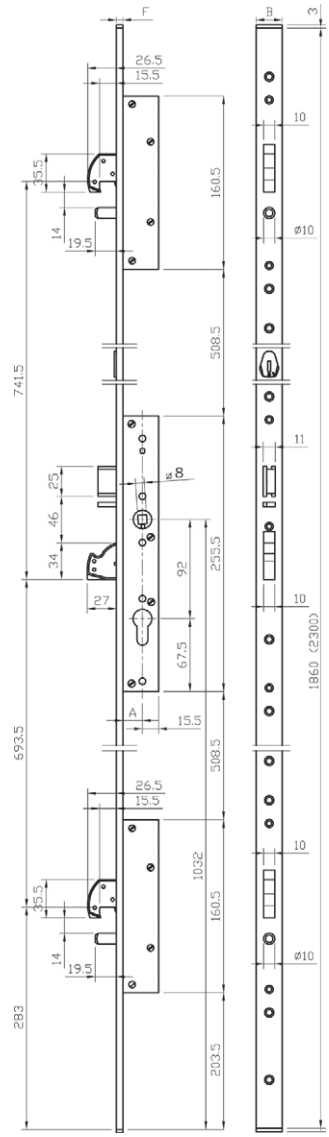

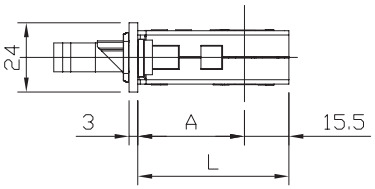

BACKSET	A	L
35	32	47.5
40	37	52.5
45	42	57.5
50	47	62.5
55	52	67.5
60	57	72.5
65	62	77.5

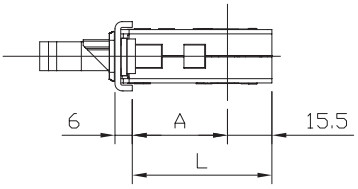

BACKSET	A	L
35	28	43.5
40	33	48.5
45	38	53.5
50	43	58.5
55	48	63.5
60	53	68.5
65	58	73.5

Multipoint mortice lock for metal frames, self-locking latchbolt and 3 deadbolts, **rotating hook deviators and pin**. Central lock, centre distances 92 mm, operating with European profile cylinder. Right or left latchbolt, non **reversible**. Deadbolts and latchbolt operated by key or handle. Lock and deviators deadbolts 27 mm throw, with anti-drill and anti-cut cover plates in hardened steel. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Matching accessories:


Extension for U-shaped front plate
Version with latch bolt deviator for fourth locking point 7AX100002
Version with latch bolt deviator and M8 rod preparation and ferrule for fifth locking point 7AX200002

Strike plates for U front plate in stainless steel 24x6
Long mechanical strike plates 032600 - 032601
Long mechanical strike plates for semi-fixed secondary leaf 032608 - 032610
Mechanical strike plates 033232 - 033233
Electric strikes 033242 - 033243
Strike plates for deviators 033167 - 033171
Strike plates for Extensions 24X6X180 033107
Long mechanical strike plates for Extensions 032620
Long mechanical strike plates for Extensions semi-fixed secondary leaf 032624 - 032626


Extension for flat front plate
Version with latch bolt deviator for fourth locking point 7AX100002
Version with latch bolt deviator and M8 rod preparation and ferrule for fifth locking point 7AX200002

Strike plates for flat front plate in stainless steel 24x3
Long mechanical strike plates 032602 - 032603
Long mechanical strike plates for semi-fixed secondary leaf 032616 - 032617
Mechanical strike plates 033230 - 033231
Electric strikes 033240 - 033241
Strike plates for deviators 033165 - 033169
Strike plates for Extensions 24X3X180 033108
Long mechanical strike plates for Extensions 032621


Multiblindo 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **1860x24x6** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3201352.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3201402.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3201452.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3201502.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A3201552.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3201602.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3201652.D**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3201352.S**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3201402.S**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3201452.S**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3201502.S**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3201552.S**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3201602.S**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3201652.S**	1	-	1



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3200352.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3200402.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3200452.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3200502.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A3200552.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3200602.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3200652.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3200352.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3200402.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3200452.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3200502.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3200552.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3200602.S**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3200652.S**	1	-	1



	Code	Single package	Multiple package	Min. ord.
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A3210352.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A3210402.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A3210452.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A3210502.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A3210602.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A3210652.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 35 **DIN LEFT**	**7A3210352.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 40 **DIN LEFT**	**7A3210402.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 45 **DIN LEFT**	**7A3210452.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 50 **DIN LEFT**	**7A3210502.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 55 **DIN LEFT**	**7A3210552.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 60 **DIN LEFT**	**7A3210602.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 65 **DIN LEFT**	**7A3210652.S**	1	-	1

Multiblindo Easy EXIT

The self-locking lock Multiblindo Easy EXIT with panic function has got the same features as the Multiblindo Easy lock and in addition it has an emergency door opening function (which works in combination with panic bar or panic handle). When the leaf is closed the synchronisation device automatically locks the deadbolts and the latchbolt, as soon as the leaf is perfectly aligned. A microswitch detects and signals the deadbolt status.



Pro EXIT **panic bar**

Operating bar on which a microswitch can be applied. It detects the emergency opening.
With AntiGerm antibacterial protection.

It is certified

EN12209:12 - Multiblindo Easy EXIT Lateral

3	X	9	B	0	G	7	0

EN179:08 - Multiblindo Easy EXIT Lateral

3	7	7	B	1	4	5	2	A	B

EN1125:08 - Multiblindo Easy EXIT Lateral

3	7	7	B	1	4	2	1	A	B

pr EN15685:22 - Multiblindo Easy EXIT

3	X	9	B	0	G	7	0	3	0

EN179:08 - Multiblindo Easy EXIT + Lever handle

3	7	7	B	1	4	5	2	A	B

EN179:08 - Multiblindo Easy EXIT + Extension + Lever handle

3	7	7	A	1	3	5	2	A	A/B

EN1125:08 - Multiblindo Easy EXIT + Pro EXIT

3	7	7	B	1	4	2	1	A	B

EN1125:08 - Multiblindo Easy EXIT + Extension + Pro EXIT

3	7	7	A	1	3	2	1	A	A/B

Multiblindo Easy EXIT



Locking

The lock is self-locking: by closing the leaf, the lock engages the deadbolts and the latches automatically. The end user can change anytime the re-closing settings by switching the mechanical selector placed on the lock front plate. A specific high performance patented system allows the operation of the bolts only when the latch is engaged in the strike plate by at least 3 mm. The latchbolt aligns perfectly the leaf to the door jamb; this operation ensures the best condition for the free movement of the deadbolts.



Opening

Outside opening: the deadbolts are unlocked with a single turn of the key in the opening direction; the latchbolt is unlocked with a further ¼ turn.
Inside opening: the deadbolts are unlocked with a single turn of the key in the opening direction; the latchbolt is unlocked with a further ¼ turn. Deadbolts and latchbolt are unlocked with the panic operating bar.



Total "0" **Deadbolts and latchbolt automatic locking**





Light "1" **Locking by latchbolt only**




Free "2" **Setting without locking** (it allows to set the hold-open function)


Multiblindo Easy EXIT 92 mm centre distance

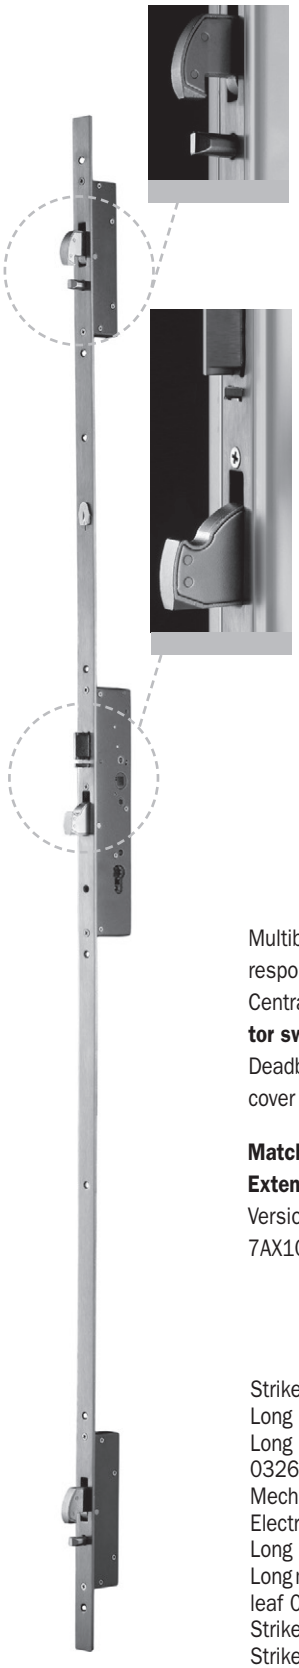

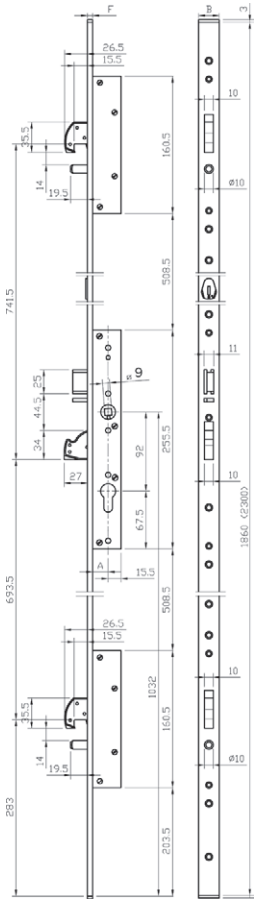


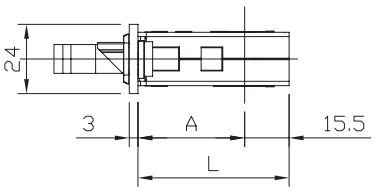

BACKSET	A	L
35	32	47.5
40	37	52.5
45	42	57.5
50	47	62.5
55	52	67.5
60	57	72.5
65	62	77.5

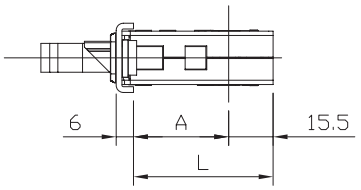

BACKSET	A	L
35	28	43.5
40	33	48.5
45	38	53.5
50	43	58.5
55	48	63.5
60	53	68.5
65	58	73.5

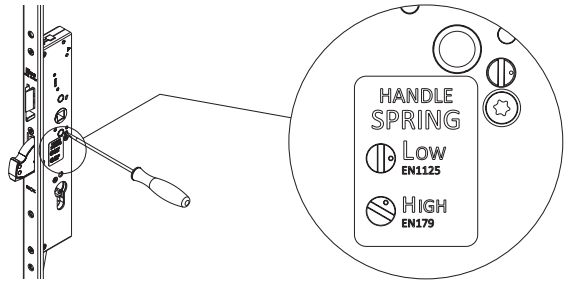

Multiblindo Easy EXIT with panic function is composed by the multipoint mortise door lock for metal frames and the with corresponding strike plates and the the operating bar Pro EXIT or panic handle (to be ordered separately).
Central lock, centre distance 92 mm, operating with European profile cylinder. **Hold-open function**. **Mechanical selector switch** for the functions total locking, latch-only locking and hold-open function. Right or left latchbolt, **non reversible**. Deadbolts and latchbolt operated by key or handle. Lock and deviators deadbolts 27 mm throw, with anti-drill and anti-cut cover plates in hardened steel. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Matching accessories:


Extension for U front plate
Version with latch bolt deviator for fourth locking point
7AX100002

Extension for flat front plate
Version with latch bolt deviator for fourth locking point
7AX100002


Strike plates for **U front plate stainless steel** 24X6
Long mechanical strike plates 032600 - 032601
Long mechanical strike plates for semi-fixed secondary leaf 032608 - 032610
Mechanical strike plates 033232 - 033233
Electric strikers 033242 - 033243
Long mechanical strike plates for Extensions 032620
Long mechanical strike plates for Extensions semi-fixed secondary leaf 032624 - 032626
Strike plates for deviators 033167 - 033171
Strike plates for Extensions 24X6X180 033107

Strike plates for **flat front plate stainless steel** 24X3
Long mechanical strike plates 032602 - 032603
Long mechanical strike plates for semi-fixed secondary leaf 032616 - 032617
Mechanical striker 033230 - 033231
Electric strikers 033240 - 033241
Strike plates for deviators 033165 - 033169
Strike plates for Extensions 24X3X180 033108
Long mechanical strike plates for Extensions 032621

Multiblindo Easy EXIT 92 mm centre distance




	Code	Single package	Multiple package	Min. ord.
U-front plate **2300x24x6** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A39003522D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A39004022D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A39004522D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A39005022D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A39005522D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A39006022D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A39006522D.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 35 **DIN LEFT**	**7A39003522S.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 40 **DIN LEFT**	**7A39004022S.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 45 **DIN LEFT**	**7A39004522S.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 50 **DIN LEFT**	**7A39005022S.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 55 **DIN LEFT**	**7A39005522S.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 60 **DIN LEFT**	**7A39006022S.A.1**	1	-	1
U-front plate **2300x24x6** in stainless steel. Backset mm 65 **DIN LEFT**	**7A39006522S.A.1**	1	-	1




Flat front-plate **2300x24x3** in stainless steel. Backset mm 35 **DIN RIGHT**	**7A39103522D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 40 **DIN RIGHT**	**7A39104022D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 45 **DIN RIGHT**	**7A39104522D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 50 **DIN RIGHT**	**7A39105022D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 55 **DIN RIGHT**	**7A39105522D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 60 **DIN RIGHT**	**7A39106022D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 65 **DIN RIGHT**	**7A39106522D.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 35 **DIN LEFT**	**7A39103522S.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 40 **DIN LEFT**	**7A39104022S.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 45 **DIN LEFT**	**7A39104522S.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 50 **DIN LEFT**	**7A39105022S.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 55 **DIN LEFT**	**7A39105522S.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 60 **DIN LEFT**	**7A39106022S.A.1**	1	-	1
Flat front-plate **2300x24x3** in stainless steel. Backset mm 65 **DIN LEFT**	**7A39106522S.A.1**	1	-	1

Multiblindo Easy EXIT **lateral**



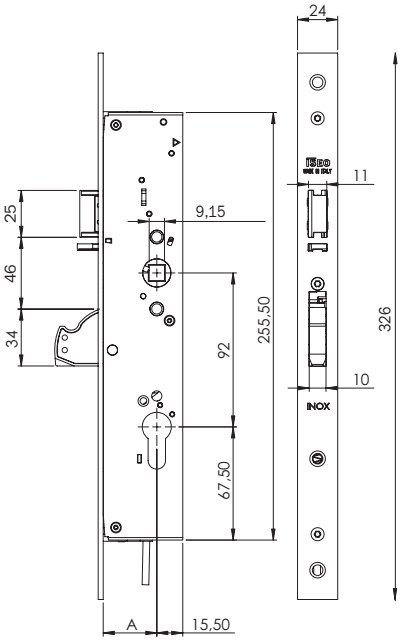

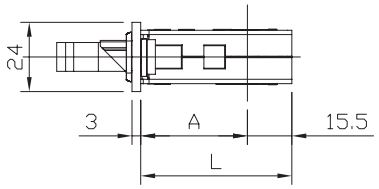


BACKSET	A	L
35	32	47.5
40	37	52.5
45	42	57.5
50	47	62.5
55	52	67.5
60	57	72.5
65	62	77.5

Multiblindo Easy Exit panic function/emergency is made up of the lateral mortice lock with its striking plates and the operation bar Pro EXIT or handle (to be ordered separately). Central lock, centre distance 92 mm, operating with European profile cylinder. **Without hold-open function**. With microswitch detects and signals the deadbolt status. Right or left latchbolt, **non reversible**. Deadbolts and latchbolt operated by key or handle/rod. Lock and deviators deadbolt, 27 mm throw, with anti-drill and anti-cut cover
plates in hardened steel. Fixing screws. Instruction sheet.

Matching accessories:
Strike plates for **U front plate stainless steel** 24X6
Mechanical strike plates 033232 - 033233
Strike plates for **flat front plate stainless steel** 24X3
Mechanical strike plates 033230 - 033231


Multiblindo Easy EXIT lateral



	Code	Single package	Multiple package	Min. ord.
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 35 **DIN RIGHT**	**7A1A163522D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 40 **DIN RIGHT**	**7A1A164022D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 45 **DIN RIGHT**	**7A1A164522D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 50 **DIN RIGHT**	**7A1A165022D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 55 **DIN RIGHT**	**7A1A165522D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 60 **DIN RIGHT**	**7A1A166022D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 65 **DIN RIGHT**	**7A1A166522D.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 35 **DIN LEFT**	**7A1A163522S.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 40 **DIN LEFT**	**7A1A164022S.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 45 **DIN LEFT**	**7A1A164522S.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 50 **DIN LEFT**	**7A1A165022S.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 55 **DIN LEFT**	**7A1A165522S.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 60 **DIN LEFT**	**7A1A166022S.A**	1	-	1
Flat front-plate **326x24x3** in stainless steel. 9 Handle follower. Backset mm 65 **DIN LEFT**	**7A1A166522S.A**	1	-	1


Pro EXIT



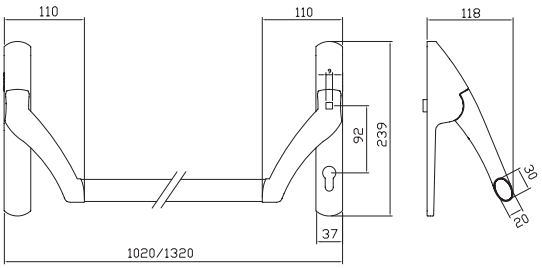


Pro EXIT. Operating bar for Multiblindo Easy EXIT and Multiblindo Emotion EXIT.

	Code	Single package		Multiple package	Min. ord.	Anti GERM
92 mm centre distance, handle follower 35°, **European cylinder**.						
Square spindle 8 mm. PVD finish	**94A000020698**	1	-	1	NO	
Square spindle 8 mm. ENDURANCE finish	**94A0000R0698**	1	-	1	YES	
Square spindle 8 mm. PAINTED BLACK	**94A000050698**	1	-	1	YES	
Square spindle 9 mm. PVD finish	**94A000020699**	1	-	1	NO	
Square spindle 9 mm. PAINTED BLACK	**94A000050699**	1	-	1	YES	
Square spindle 9 mm. ENDURANCE finish	**94A0000R0699**	1	-	1	YES	
Square spindle 9 mm. METAL GREY	**94A000070699**	1	-	1	YES	
94 mm centre distance, handle follower 35°, **SWISS profile cylinder**.						
Square spindle 9 mm. PAINTED BLACK	**94A000050669**	1	-	1	YES	



Horizontal oval bar for panic exit devices. Length mm **1130**						
Stainless steel	**945922**	1	-	1	NO	
ENDURANCE	**94592R**	1	-	1	YES	
Painted white	**945924**	1	-	1	YES	
Painted black	**945925**	1	-	1	YES	
Painted metal grey	**945927**	1	-	1	YES	
PAINTED RED	**945928**	1	-	1	YES	
Painted green RAL 6029	**94592V**	1	-	1	YES	



Horizontal oval bar for panic exit devices. Length mm **1330**						
STAINLESS STEEL	**945932**	1	-	1	NO	
ENDURANCE	**94593R**	1	-	1	YES	
PAINTED METAL GREY	**945937**	1	-	1	YES	
PAINTED RED	**945938**	1	-	1	YES	

Operating bar and horizontal bar to be ordered separately.



Microswitch, to be fitted in the Pro EXIT panic exit devices.						
Can be used in conjuction with security systems. Fixing screws. Instructions sheet.	**94100160**	1	-	1	NO	

Anti GERM : antibacterial protection

ISEO
ULTIMATE ACCESS TECHNOLOGIES


CSI

Code | Single package | Multiple package | Min. ord.

Option: with hole for SWISS profile cylinder



For cylinder 22 mm

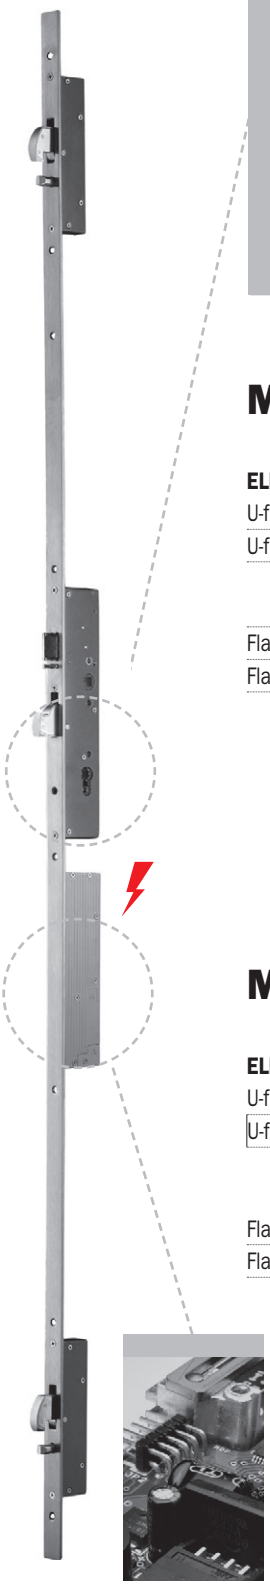

Multiblindo Emotion

ELECTROMECHANICAL central lock, centre distance 94 mm Ø 9.

U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A3800402.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN LEFT**	**7A3800402.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A3810402.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN LEFT**	**7A3810402.S**	1	-	1

Multiblindo Emotion EXIT

ELECTROMECHANICAL central lock, centre distance 94 mm Ø 9.

U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A38004021D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN LEFT**	**7A38004021S.A.1**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A38104021D.A.1**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN LEFT**	**7A38104021S.A.1**	1	-	1

Option: with hole for SWISS profile cylinder



For cylinder 22 mm



Multiblindo Easy







	Code	Single package	Multiple package	Min. ord.
ELECTROMECHANICAL central lock, centre distance 94 mm Ø 9				
U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A3400402.D**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN LEFT**	**7A3400402.S**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A3410402.D**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN LEFT**	**7A3410402.S**	1	-	1

Multiblindo Easy EXIT

	Code	Single package	Multiple package	Min. ord.
ELECTROMECHANICAL central lock, centre distance 94 mm Ø 9				
U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A34004022D.A.1**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset 40 mm **DIN LEFT**	**7A34004022S.A.1**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN RIGHT**	**7A34104022D.A.1**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset 40 mm **DIN LEFT**	**7A34104022S.A.1**	1	-	1

ISEO ULTIMATE ACCESS TECHNOLOGIES

Multipunto Multiblindo Smart. Combinations: strike plates, extensions, accessories.







	one leaf door H<2300		semi-fixed secondary leaf H<2300	one leaf door 2300<H<3220		semi-fixed secondary leaf 2300<H<3220
						
A MULTIBLINDO	7A3E0* ; 7A3E1*	7A3E0* ; 7A3E1*	7A3E0* ; 7A3E1*	7A3E0* ; 7A3E1*	7A3E0* ; 7A3E1*	7A3E0* ; 7A3E1*
B EXTENSIONS				7AX100002; 7AX110002; (7AX200002; 7AX210002 not usable on emergency doors)	7AX100002; 7AX110002; (7AX200002; 7AX210002 not usable on emergency doors)	7AX100002; 7AX110002; (7AX200002; 7AX210002 not usable on emergency doors)
MULTIPLE STRIKE PLATES	C CENTRAL LOCK STRIKE PLATES: 033326; 033327; 033230; 033231; 033232; 033233; 033328; 033329; CLOSED for EASY with electric striker 033240; 033241; 033242; 033243;			C CENTRAL LOCK STRIKE PLATES: 033326; 033327; 033230; 033231; 033232; 033233; 033328; 033329; CLOSED for EASY with electric striker 033240; 033241; 033242; 033243;		
	D DEVIATORS STRIKE PLATES: 033107; 033108; 033165 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033167 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033330 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033169 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033171 ADJUSTABLE CLOSED STRIKE PLATE HOOK			D DEVIATORS STRIKE PLATES: 033107; 033108; 033165 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033167 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033330 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033169 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033171 ADJUSTABLE CLOSED STRIKE PLATE HOOK H DEVIATORS STRIKE PLATES FOR EXTENSIONS 033107; 033108;		
SINGLE FULL-LENGTH STRIKE PLATES		E UNIQUE STRIKE PLATES: 032600; 032601; 032602; 032603			E UNIQUE STRIKE PLATES: 032600; 032601; 032602; 032603;	
					I UNIQUE STRIKE PLATES FOR EXTENSIONS: 032620; 032621;	I UNIQUE STRIKE PLATES FOR EXTENSIONS: 032620; 032621;
SINGLE FULL-LENGTH STRIKE PLATES WITH ESPAGOLETTE			F UNIQUE STRIKE PLATES WITH ESPAGNOLETTE: 032608; 032610; 032616^; 032617^;			F UNIQUE STRIKE PLATES WITH ESPAGNOLETTE: 032609; 032611; 032616^; 032617^;
			G ROD STRIKES FOR PINS AND FLOOR SOCKETS: 032154; 032164;			G ROD STRIKES FOR PINS AND FLOOR SOCKETS: 032154; 032164;

= underlined code, U-front plate

^ = Rods and rod strikes kit 032154 to be ordered separately

Multipunto Multiblindo Emotion - Multipunto Multiblindo Easy. Combinations: strike plates, extensions, accessories.

ISEO ULTIMATE ACCESS TECHNOLOGIES







	one leaf door H<2300		semi-fixed secondary leaf H<2300	one leaf door 2300<H<3220		semi-fixed secondary leaf 2300<H<3220
						
A MULTIBLINDO	7A36*; 7A38* - 7A32*; 7A34*	7A36*; 7A38* - 7A32*; 7A34*	7A36*; 7A38* - 7A32*; 7A34*	7A36*; 7A38* - 7A32*; 7A34*	7A36*; 7A38* - 7A32*; 7A34*	7A36*; 7A38* - 7A32*; 7A34*
B EXTENSIONS				7AX100002; 7AX110002; 7AX200002; 7AX210002	7AX100002; 7AX110002; 7AX200002; 7AX210002	7AX100002; 7AX110002; 7AX200002; 7AX210002
MULTIPLE STRIKE PLATES	**C CENTRAL LOCK STRIKE PLATES:** **033326; 033327; 033230; 033231; 033232; 033233; 033328; 033329;** CLOSED for EASY with electric striker **033240**; **033241**; **033242; 033243** **D DEVIATORS STRIKE PLATES:** **033107; 033108;** **033165** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK **033167** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK **033330** ADJUSTABLE CLOSED STRIKE PLATE HOOK **033169** ADJUSTABLE CLOSED STRIKE PLATE HOOK **033171** ADJUSTABLE CLOSED STRIKE PLATE HOOK			**C CENTRAL LOCK STRIKE PLATES:** **033326; 033327; 033230; 033231; 033232; 033233; 033328; 033329;** CLOSED for EASY with electric striker**033240; 033241; 033242; 033243;** **D DEVIATORS STRIKE PLATES:** **033107; 033108;** **033165** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK **033167** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK **033330** ADJUSTABLE CLOSED STRIKE PLATE HOOK **033169** ADJUSTABLE CLOSED STRIKE PLATE HOOK **033171** ADJUSTABLE CLOSED STRIKE PLATE HOOK **H DEVIATORS STRIKE PLATES FOR EXTENSIONS** **033107; 033108;** **ROD STRIKES FOR PINS AND FLOOR SOCKETS: 032154;**		
SINGLE FULL-LENGTH STRIKE PLATES					**E UNIQUE STRIKE PLATES:** **032600; 032601; 032602; 032603;**	
		E UNIQUE STRIKE PLATES: **032600; 032601; 032602; 032603;**			**I UNIQUE STRIKE PLATES FOR EXTENSIONS: 032620; 032621;** **G ROD STRIKES FOR PINS AND FLOOR SOCKETS: 032154;**	**I UNIQUE STRIKE PLATES FOR EXTENSIONS:** **032620; 032621;**
SINGLE FULL-LENGTH STRIKE PLATES WITH ESPAGOLETTE			**F UNIQUE STRIKE PLATES WITH ESPAGNOLETTE:** **032608; 032610; 032616^; 032617^;**			**F UNIQUE STRIKE PLATES WITH ESPAGNOLETTE:** **032608; 032610; 032616^; 032617^;**
			G ROD STRIKES FOR PINS AND FLOOR SOCKETS: **032154; 032164;**			**G ROD STRIKES FOR PINS AND FLOOR SOCKETS:** **032154; 032164;**

= underlined code, U-front plate

^ = Rods and rod strikes kit 032154 to be ordered separately

ISEO ULTIMATE ACCESS TECHNOLOGIES


Multipunto Multiblindo Emotion Exit - Multipunto Multiblindo Easy Exit. Combinations: strike plates, extensions, accessories.

	one leaf door H<2300		semi-fixed secondary leaf H<2300	one leaf door 2300<H<3220		semi-fixed secondary leaf 2300<H<3220
						
A MULTIBLINDO	7A37*; 7A38* - 7A39*; 7A34*	7A37*; 7A38* - 7A39*; 7A34*	7A37*; 7A38* - 7A39*; 7A34*	7A37*; 7A38* - 7A39*; 7A34*	7A37*; 7A38* - 7A39*; 7A34*	7A37*; 7A38* - 7A39*; 7A34*
B EXTENSIONS				7AX100002; 7AX110002	7AX100002; 7AX110002	7AX100002; 7AX110002
MULTIPLE STRIKE PLATES	C CENTRAL LOCK STRIKE PLATES: 033326; 033327; 033230; 033231; 033232; 033233; 033328; 033329; CLOSED for EASY with electric striker: 033240; 033241; 033242; 033243;			C CENTRAL LOCK STRIKE PLATES: 033326; 033327; 033230; 033231; 033232; 033233; 033328; 033329; CLOSED for EASY with electric striker: 033240; 033241; 033242; 033243;		
	D DEVIATORS STRIKE PLATES: 033107; 033108; 033165 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033167 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033330 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033169 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033171 ADJUSTABLE CLOSED STRIKE PLATE HOOK			D DEVIATORS STRIKE PLATES: 033107; 033108; 033165 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033167 PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/ BOTTOM HOOK 033330 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033169 ADJUSTABLE CLOSED STRIKE PLATE HOOK 033171 ADJUSTABLE CLOSED STRIKE PLATE HOOK H DEVIATORS STRIKE PLATES FOR EXTENSIONS 033107; 033108;		
SINGLE FULL-LENGTH STRIKE PLATES		E UNIQUE STRIKE PLATES: 032600; 032601; 032602; 032603			E UNIQUE STRIKE PLATES: 032600; 032601; 032602; 032603;	
					I UNIQUE STRIKE PLATES FOR EXTENSIONS: 032620; 032621;	I UNIQUE STRIKE PLATES FOR EXTENSIONS: 032620; 032621;
SINGLE FULL-LENGTH STRIKE PLATES WITH ESPAGOLETTE			F UNIQUE STRIKE PLATES WITH ESPAGNOLETTE: 032608; 032610; 032616^; 032617^;			F UNIQUE STRIKE PLATES WITH ESPAGNOLETTE: 032609; 032611; 032616^; 032617^;
			G ROD STRIKES FOR PINS AND FLOOR SOCKETS: 032154; 032164;			G ROD STRIKES FOR PINS AND FLOOR SOCKETS: 032154; 032164;

= underlined code, U-front plate

^ = Rods and rod strikes kit 032154 to be ordered separately


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

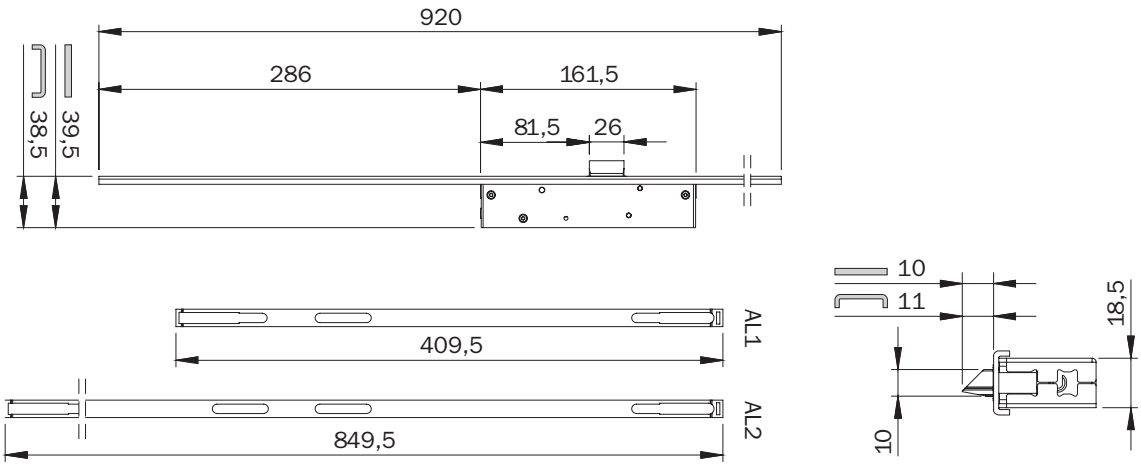

Extension

Extension with ambidextrous reversible latch bolt deviator for fourth locking point.
The extension allows the Multiblindo lock to be fitted on doors up to 3220 mm.

	Code	Single package		Multiple package	Min. ord.
U front plate **24X6X920**	**7AX100002**	1	-	1	
Flat front plate **24X3X920**	**7AX110002**	1	-	1	

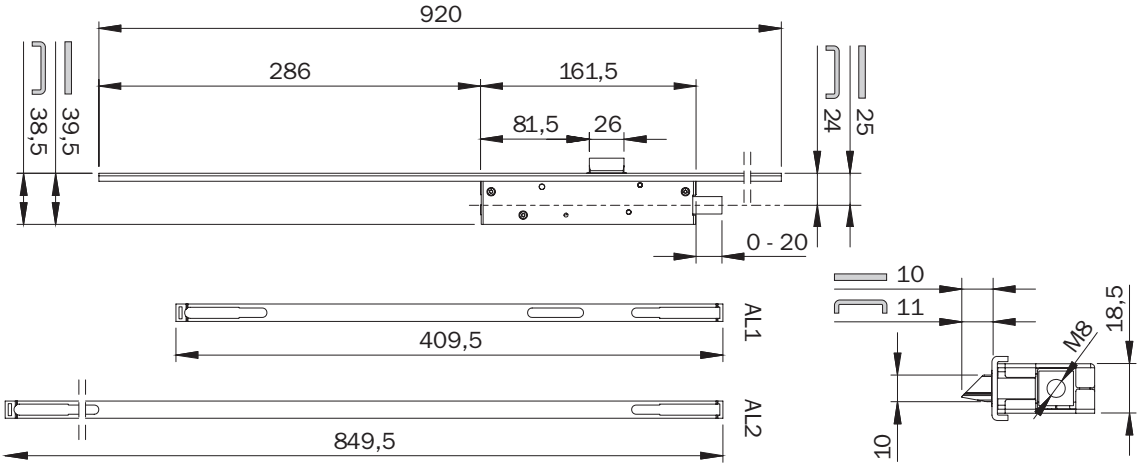


Extension

(Can only be combined with Multiblindo Easy and Multiblindo Emotion - Cannot be used on EXIT versions)
Extension with latch deviator and provision for M8 rod and ferrule, for fourth and fifth point of closure The extension allows the Multiblindo lock to be fitted on doors up to 3220 mm.


	Code	Single package		Multiple package	Min. ord.
U front plate **24X6X920**	**7AX200002**	1	-	1	
Flat front plate **24X3X920**	**7AX210002**	1	-	1	


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion



Long strike plate for one leaf door in stainless steel for Multiblindo Smart, Easy/ Easy Exit and Emotion/Emotion Exit

	Code	Single package		Multiple package
U front plate **24X6X2300** RIGHT	**032600**	1	-	1
U front plate **24X6X2300** LEFT	**032601**	1	-	1
Flat front-plate **24X3X2300** RIGHT	**032602**	1	-	1
Flat front-plate **24X3X2300** LEFT	**032603**	1	-	1






Long strike plate Extensions for one leaf door in stainless steel for Multiblindo Smart, Easy/Easy Exit and Emotion/Emotion Exit

	Code	Single package		Multiple package
U front plate **24X6X1080**	**032620**	1	-	1
Flat front-plate **24X3X1080**	**032621**	1	-	1


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

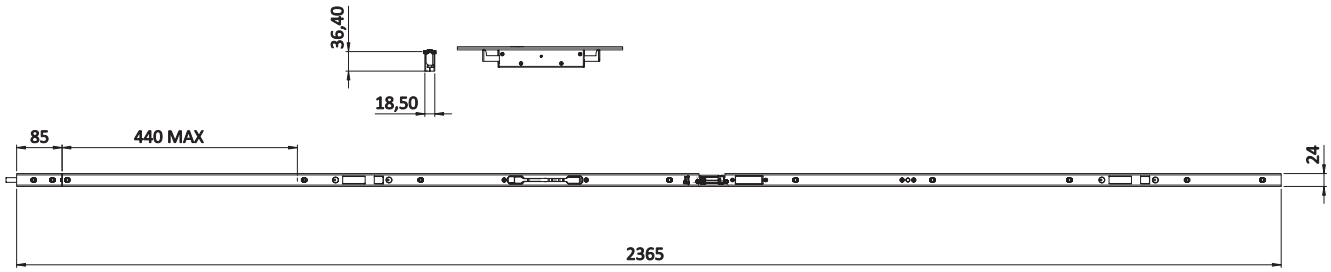

Long strike plate for semi-fixed secondary leaf with U-front plate in stainless steel and manual lever espagnolette for Multiblindo Smart, Easy/Easy Exit and Emotion/Emotion Exit*


	Code	Single package		Multiple package	Min. ord.
U front plate **24X6X2300** RIGHT	**032608**	1	-	1	
U front plate **24X6X2300** LEFT	**032610**	1	-	1	

* Kit includes external rods, high and low pins and rod strikes for pins

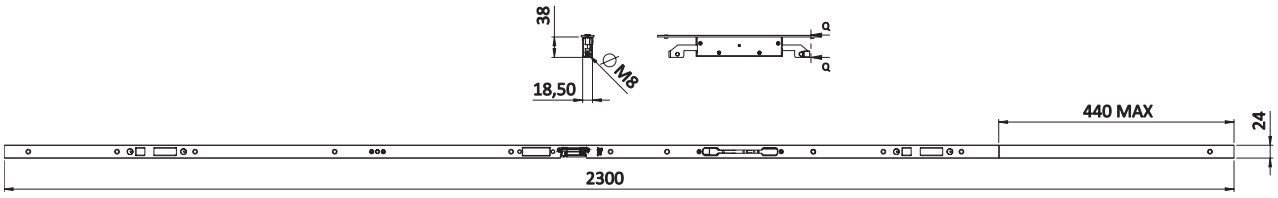

Long strike plate for semi-fixed secondary leaf with flat front plate in stainless steel and manual lever espagnolette for Multiblindo Smart, Easy/Easy Exit and Emotion/ Emotion Exit







	Code	Single package		Multiple package	Min. ord.
Flat front-plate **24X3X2300** RIGHT	**032616**	1	-	1	
Flat front-plate **24X3X2300** LEFT	**032617**	1	-	1	

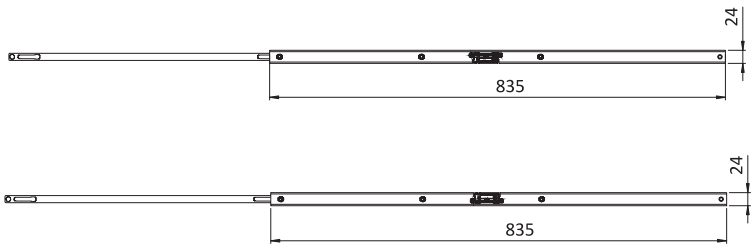

Long strike plate Extensions for semi-fixed secondary leaf in stainless steel for Multiblindo Smart, Easy/Easy Exit and Emotion/Emotion Exit

	Code	Single package		Multiple package	Min. ord.
U front plate **24X6X835** RIGHT	**032624**	1	-	1	
U front plate **24X6X835** LEFT	**032626**	1	-	1	

Accessories

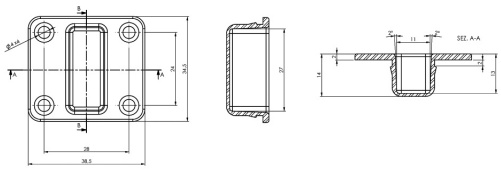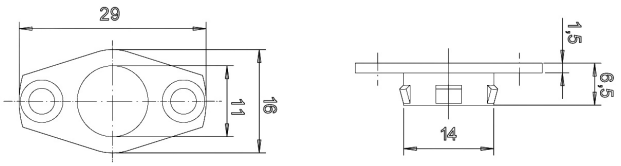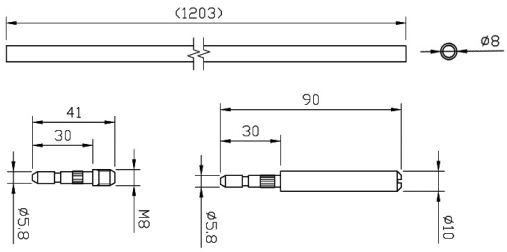
	Code	Single package	Multiple package	Min. ord.
  **Rod hasp top**	**032154**	-	10	10
  **Floor strike cup**	**032164**	-	10	10
  **Rod hasp bottom**	**032174**	-	10	10
  **Rods for counterlock/flush bolt M8 complete with tips**	**032184**	1	-	1
 **Rods extension for counterlock/flush bolt** L= 3400	**0321A4**	1	-	1

Accessories

	Code	Single package	Multiple package	Min. ord.
 Steel **plate for bottom rod hasp,** to be fixed on **reversible secondary leafs**	**032704**	-	10	10


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

	Code	Single package	Multiple package	Min. ord.

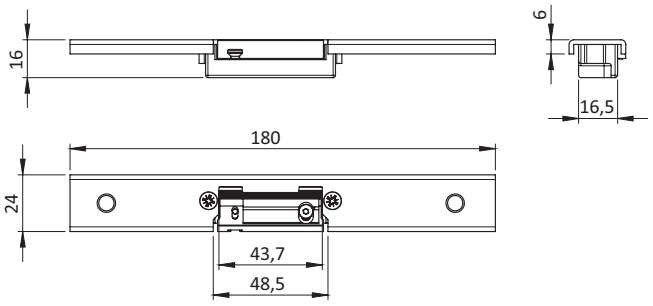

Closed strike plate
Adjustable and ambidextrous closed strike plate for Multiblindo Easy and Multiblindo Emotion extension deviator in stainless steel with mechanical striker.

U front plate **24X6X180**	**033107**	1	-	10

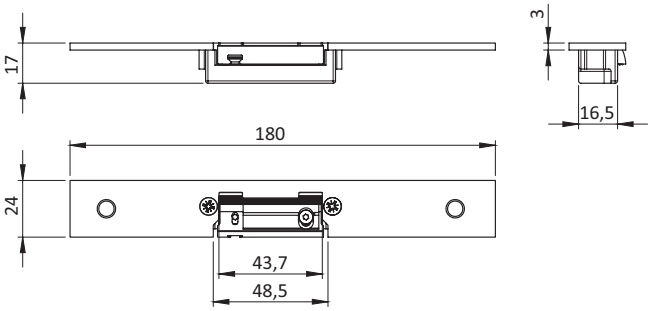


Closed strike plate
Adjustable and ambidextrous closed strike plate for Multiblindo Easy and Multiblindo Emotion extension deviator in stainless steel with mechanical striker.

Flat front-plate **24X3X180**	**033108**	1	-	10


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

	Code	Single package	Multiple package	Min. ord.

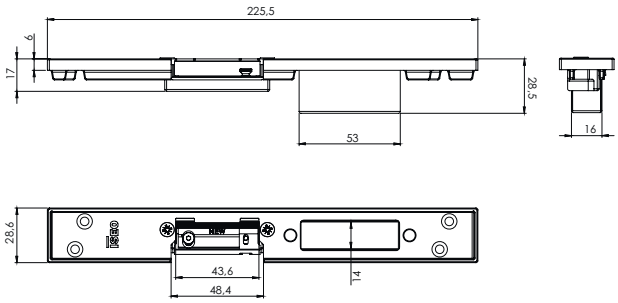

Adjustable closed striking plate for **central lock** with adapter
Multiblindo Easy and Multiblindo Emotion.
In stainless steel with mechanical striker. Specifically for profile TYPE R.


Flat front-plate **24x3x220 (adapter 225,5x28,6x6) DIN LEFT**	**033326**	10	-	10

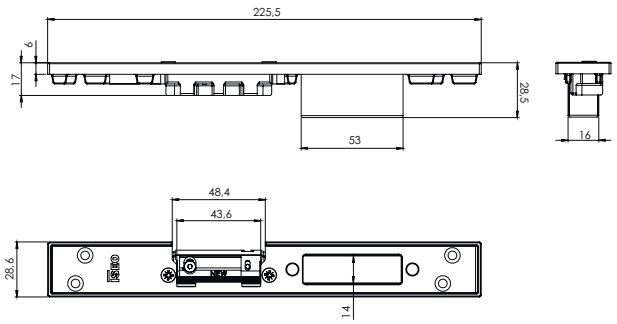


Adjustable closed striking plate for **central lock** with adapter
Multiblindo Easy and Multiblindo Emotion.
In stainless steel with mechanical striker. Specifically for profile TYPE R.


Flat front-plate **24x3x220 (adapter 225,5x28,6x6) DIN RIGHT**	**033327**	10	-	10


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion



Full-size scale

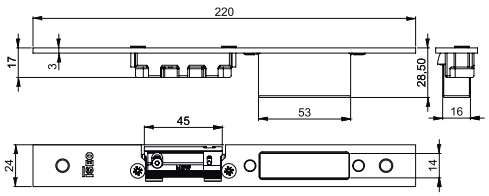








In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate

Code	Single package	Multiple package	Min. ord.
Adjustable closed striking plate for **central lock** Multiblindo Smart, Easy, Emotion. In stainless steel with mechanical striker.			
Flat front-plate **24x3x220 DIN LEFT**	**033230**	10 -	10
Flat front-plate **24x3x220 DIN RIGHT**	**033231**	10 -	10



Full-size scale

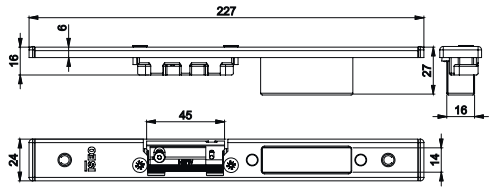




In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate


Adjustable closed striking plate for **central lock** Multiblindo Smart, Easy, Emotion. In stainless steel with mechanical striker.				
U-front plate **24x6x220 DIN LEFT**	**033232**	10	-	10
U-front plate **24x6x220 DIN RIGHT**	**033233**	10	-	10

Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

Code	Single package	Multiple package	Min. ord.

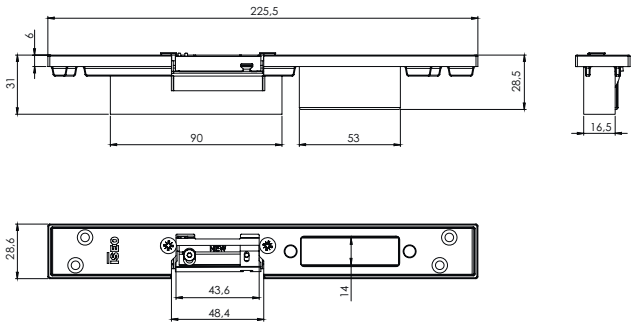


Adjustable closed striking plate for **central lock**
Multiblindo Smart, Easy, Emotion.
In stainless steel with mechanical striker. Specific for profile TYPE R with electric striker eleasing only during the electrical impulse 12Vac 15W.
Flat front-plate **24x3x220 DIN LEFT** **033328** 10 - 10

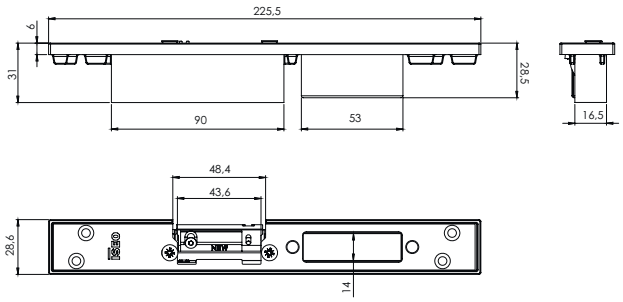


Adjustable closed striking plate for **central lock**
Multiblindo Smart, Easy, Emotion.
In stainless steel with mechanical striker. Specific for profile TYPE R with electric striker eleasing only during the electrical impulse 12Vac 15W.
Flat front-plate **24x3x220 DIN RIGHT** **033329** 10 - 10


Code	Single package	Multiple package	Min. ord.


Multiblindo Easy



Full-size scale

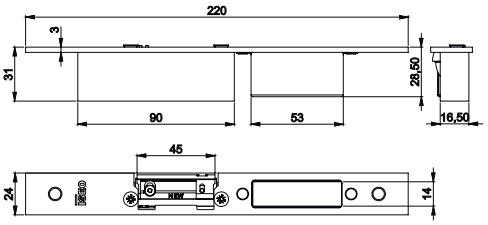







In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate


Adjustable closed striking plate for **central lock**
Multiblindo Easy.
In stainless steel with electric striker releasing only during the electrical impulse **12Vac 15W**.

Flat front-plate **24x3x220 DIN LEFT**	**033240**	10	-	10
Flat front-plate **24x3x220 DIN RIGHT**	**033241**	10	-	10



Full-size scale

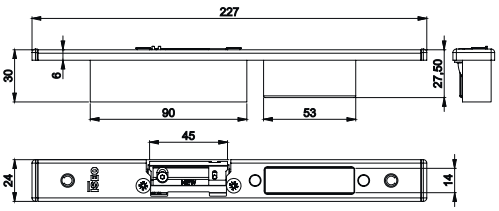



In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate

Adjustable closed striking plate for **central lock**
Multiblindo Easy.
In stainless steel with electric striker releasing only during the electrical impulse 12Vac 15W.


U-front plate **24x6x220 DIN LEFT**	**033242**	10	-	10
U-front plate **24x6x220 DIN RIGHT**	**033243**	10	-	10


Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

Code | Single package | Multiple package | Min. ord.




Full-size scale

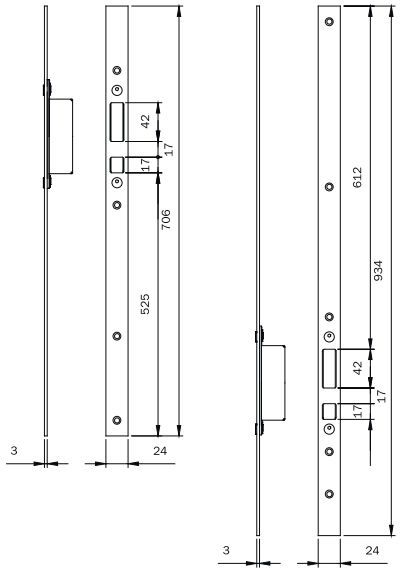

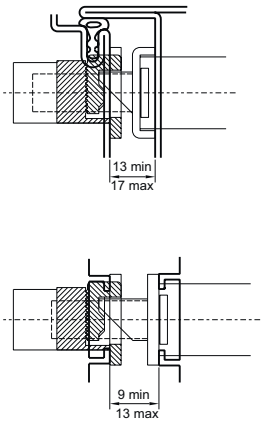



In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate

Pair of **adjustable** closed **striking plates** for top/bottom
Hook deviators Multiblindo Smart, Easy, Emotion. In stainless steel. Flat front plate **24X3X1860**
Can be used with central strike plates.
033230 - 033231 - 033240 - 033241 - 033160 - 033161 | **033165** | 10 | - | 10



Full-size scale

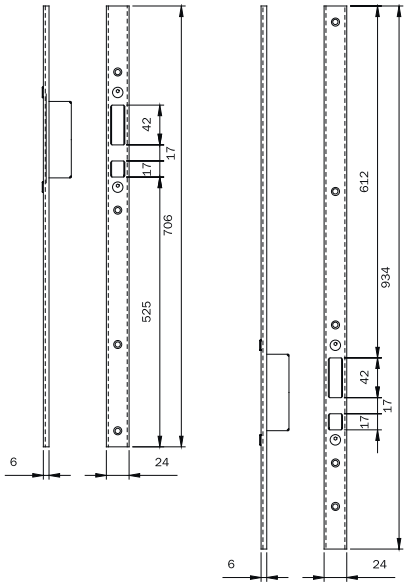




In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate


Pair of **adjustable** closed **striking plates** for top/bottom
Hook deviators Multiblindo Smart, Easy, Emotion. In stainless steel. U-front plate **24X6X1860**.
Can be used with central strike plates.
033232 - 033233 - 033242 - 033243 - 033162 - 033163 | **033167** | 10 | - | 10


Multiblindo Easy - Multiblindo Emotion

Code	Single package	Multiple package	Min. ord.

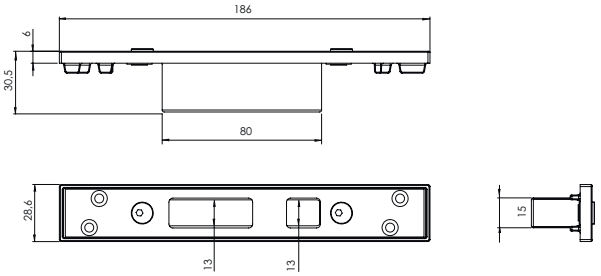


Adjustable closed striking plate for **hook deviators** with adapter
Multiblindo Easy and Multiblindo Emotion.
In stainless steel. Flat front plate **24x3x180 (adapter 225,5x28,6x6).**
Specifically for profile TYPE R with electric striker. To be used with strike plates.
033328 - 033231 - 033329 - 033326 - 033327 **033330** 10 - 10

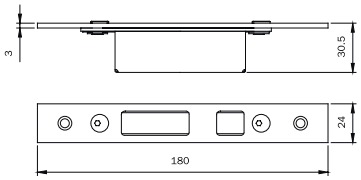



Full-size scale


In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate





Adjustable closed striking plate for **hook deviators**
Multiblindo Easy and Multiblindo Emotion.
In stainless steel. Flat front plate **24X3X180**.
To be used with strike plates.
033230 - 033231 - 033240 - 033241 - 033160 - 033161 **033169** 10 - 10

Multiblindo Smart - Multiblindo Easy Multiblindo Emotion

	Code	Single package	Multiple package	Min. ord.




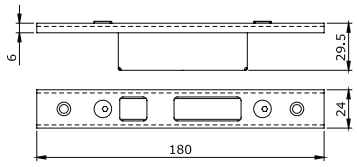




In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate

Adjustable closed striking plate for **hook deviators**
Multiblindo Smart, Easy, Emotion
In stainless steel. U-front plate **24X6X180**.
To be used with strike plates.
033232 - 033233 - 033242 - 033243 - 033162 - 033163 — **033171** — 10 - 10



Full-size scale

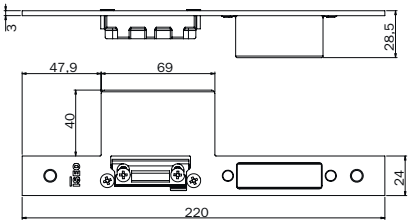

Striking plate plate with fins for wooden doors.
Adjustable for central lock
Multiblindo Smart, Easy, Emotion
In stainless steel with mechanical striker.
DIN Left — **033244** — 10 - 10
DIN Right — **033245** — 10 - 10



Multiblindo Classic

Lock for metal frames

Multiblindo Classic

It is certified

EN12209:16 - Blindo

3	X	9	A	0	G	7	0

pr EN15685:22 - Multiblindo Classic

3	X	9	A	0	G	7	0	3	0


pr EN15685:22 - Multiblindo Classic + Extension


3	X	6	A	0	F	7	0	3	0

Using Multiblindo in combination with ISEO cylinders range, means reaching an extremely high security standard to the doors. Multiblindo's security features include:
- steel lock case, closed on all sides;
- reinforced deadbolts with hardned steel layers for high cut and drill protection;
- new deadbolt system (patented) preventing break-in attempts (fig. 2,3,4);
- external forces applied on one of the deadbolts have no effect on the other two, which means that any eventual break-in attempts would have to be repeated separately for each deadbolt.


Multiblindo Classic

A) Deadbolt fulcrum pin
B) Programmed breaking point
C) Security pins
D) Movement transmission and deadbolt locking rod







Open lock



Closed lock. Blocking is ensured by element "D", which opposes the deadbolt and secures it against the back wall of the lock case. Pins "C" are not operating.



By appling an upwards force, equivalent to one metric ton, breaking point "B" yields letting pins "C" insert themselves into their respective spaces in the plate consolidated to the lock case. The deadbolt and the case fundamentally become one single body.





The deadbolt can no longer enter again the lock case when its rotation axis is moved, as it interferes with the front plate "E".

CSI


Multiblindo Classic 92 mm centre distance



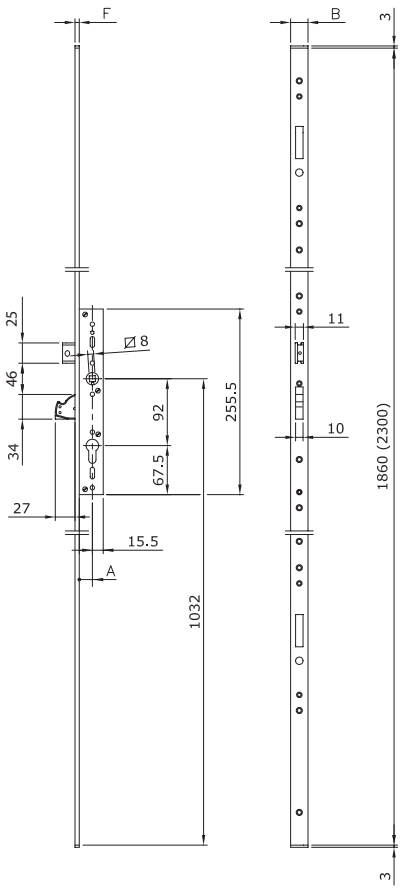




Code							
Art		E		A	S	B	F
79**	10	25	2	22	37.5	24	3
		30		27	42.5		
		35		32	47.5		
		40		37	52.5		



Code							
Art.		E		A	S	B	F
79**	00	25	2	18	33.5	24	6
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		
	01	25		18	33.5		
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		




Code							
Art.		E		A	S	B	F
79**	50	25	0	18	33.5	22	7
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		

Multiblindo mortice lock for metal frames, **modular, rotating deadbolt**.
Central lock, centre distance 92 mm, operating with European profile cylinder.
Front plate with holes for additional deviators.
Rotating deadbolt, 27 mm throw with antidrill/anticut cover plates in hardned steel.
Supplied with reversible and adjustable latchbolt. The latchbolt can be replaced with roller or cap for deadlocking only. Latchbolt/roller operated by key or 8 mm handle follower.
Built-in connecting rods between lock and deviators. 2 nylon end blocks for U-version.
Fixing screws. Instruction sheet.


Matching accessories:
Rotating deadbolt deviator - ref. 790330000
Rotating hook deviator - ref. 790340000
Bottom-locking deviator - ref. 790310000
Top-locking deviator - ref. 790320000
Extension with rotating hook deviators and pin, **U front plate** 79X300002
Extension with rotating hook deviators and pin, **flat front plate**79X310002
Modular roller for latchbolt hole - ref. 040801/2/3/4
Modular cap for latchbolt hole - ref. 040810
Cylinder escutcheon - ref. 040809 - cod. 98.05.04/05/06
Anti-drill plate - ref. 040805. 25/30/35/40
Long strike plates cod. 032604, 032605, 03606, 032607
Long strike plates for extension cod. 032622, 032623
Long strike plates for semi-fixed secondary leaf cod. 032612, 032614, 03618, 032619
Long strike plates for extensions on semi-fixed secondary leaf cod. 032628




Multiblindo Classic 92 mm centre distance




	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 25	**799100252**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 30	**799100302**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35	**799100352**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40	**799100402**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 25	**799101252**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 30	**799101302**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 35	**799101352**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 40	**799101402**	1	-	1



U-front plate mm **2300x24x5** in stainless steel. Backset mm 25	**799130252**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 30	**799130302**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 35	**799130352**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 40	**799130402**	1	-	1




Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 25	**799110252**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 30	**799110302**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 35	**799110352**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 40	**799110402**	1	-	1



U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 25	**799150250**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 30	**799150300**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 35	**799150350**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 40	**799150400**	1	-	1


Multiblindo classic

	Code	Single package	Multiple package	Min. ord.



Deviator for Multiblindo, lower locking, to be applied on the modular front plate.
M8 threaded square for tip bolt. Multi-faceted, anti-screw **tip bolt Ø 14X55**
with threaded hole M8, tip length 20 mm. Antidust brass rod cap Ø 18 Cod. 040807.
Screws and pins.

	790310000	1	10	10



Deviator for Multiblindo, upper locking, to be applied on the modular front plate.
M8 threaded square for tip bolt. Multi-faceted, anti-screw **tip bolt Ø 14X55** with
tip length 20 mm. Zinc-plated plate and nylon tip-guiding spacer Cod. 040806.
Screws and pins.

	790320000	1	10	10



Deviator for Multiblindo, lateral locking, to be applied on the modular front plate.
Rotating Deadbolt 27 mm throw with antidrill and anticut
cover plates in carbonitrided steel. Screws.
Accessories to be ordered separately: Striking plates

	790330000	1	10	10




Deviator for Multiblindo, lateral locking, to be applied on the modular front plate.
Rotating hook and pivot pin, clearance 15,5 mm and 26,5 mm throw with antidrill and
anticut cover plates in carbonitrided steel and sliding latchbolt. Screws.
Accessories to be ordered separately: Striking plates


	790340000	1	10	10

CSI


Multiblindo Classic 92 mm centre distance 92 mm



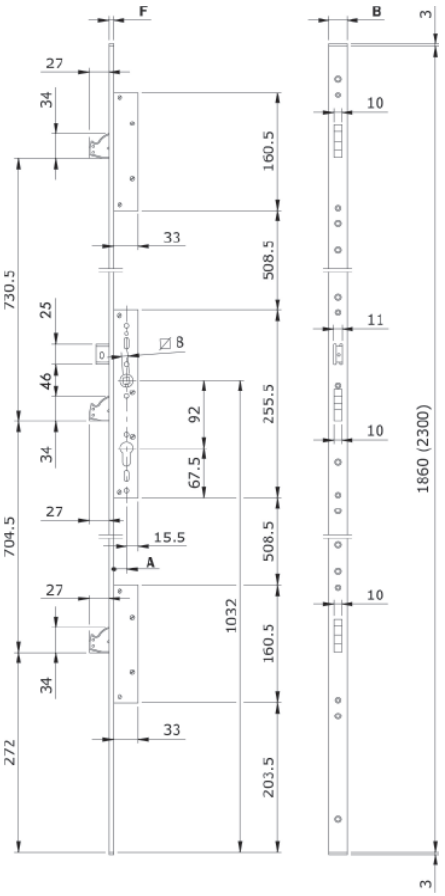




Code							
Art		E		A	S	B	F
79**	10	25	2	22	37.5	24	3
		30		27	42.5		
		35		32	47.5		
		40		37	52.5		



Code							
Art.		E		A	S	B	F
79**	00	25	2	18	33.5	24	6
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		
	01	25		18	33.5		
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		



Code							
Art.		E		A	S	B	F
79**	50	25	0	18	33.5	22	7
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		

Multiblindo mortice lock for metal frames, **deviators with rotating deadbolt and pin**.
Central lock, centre distance 92 mm, operating with European profile cylinder.
Rotating deadbolt, 27mm throw with antidrill/anticut cover plates in hardned steel.
Supplied with reversible and adjustable latchbolt. The latchbolt can be replaced with roller or cap for deadlocking only.
Latchbolt/roller operated by key or 8 mm handle follower.
2 lateral-locking deviators, assembled, with rotating deadbolt 27 mm throw
with antidrill/anticut cover plates in carbonitrided steel.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.


Matching accessories:
Extension with rotating hook deviators and pin, **U front plate** 79X300002
Extension with rotating hook deviators and pin, **flat front plate**79X310002
Long strike plates cod. 032604, 032605, 03606, 032607
Long strike plates for extension cod. 032622, 032623
Long strike plates for semi-fixed secondary leaf cod. 032612, 032614, 03618, 032619
Long strike plates for extensions on semi-fixed secondary leaf cod. 032628
Modular roller for latchbolt hole - ref. 040801/2/3/4/11/12/13/14/15
Modular cap for latchbolt hole - ref. 040810 ref. 040816
Cylinder escutcheon - ref. 040809 - ref. 98.05.04/05/06
Anti-drill plate - ref. 040805. 25/30/35/40/45/50/55/60/65

ISEO
ULTIMATE ACCESS TECHNOLOGIES


CSI

Al Fe


Multiblindo Classic 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 25	**795100252**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 30	**795100302**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35	**795100352**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40	**795100402**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45	**795100452**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50	**795100502**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55	**795100552**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60	**795100602**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65	**795100652**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 25	**795101252**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 30	**795101302**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 35	**795101352**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 40	**795101402**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 45	**795101452**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 50	**795101502**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 55	**795101552**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 60	**795101602**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 65	**795101652**	1	-	1




U-front plate mm **2300x24x5** in stainless steel. Backset mm 25	**795130252**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 30	**795130302**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 35	**795130352**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 40	**795130402**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 45	**795130452**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 50	**795130502**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 55	**795130552**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 60	**795130602**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 65	**795130652**	1	-	1



Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 25	**795110252**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 30	**795110302**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 35	**795110352**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 40	**795110402**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 45	**795110452**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 50	**795110502**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 55	**795110552**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 60	**795110602**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 65	**795110652**	1	-	1

Multiblindo Classic 92 mm centre distance





	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 25	**795150250**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 30	**795150300**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 35	**795150350**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 40	**795150400**	1	-	1


CSI


Multiblindo Classic 92 mm centre distance



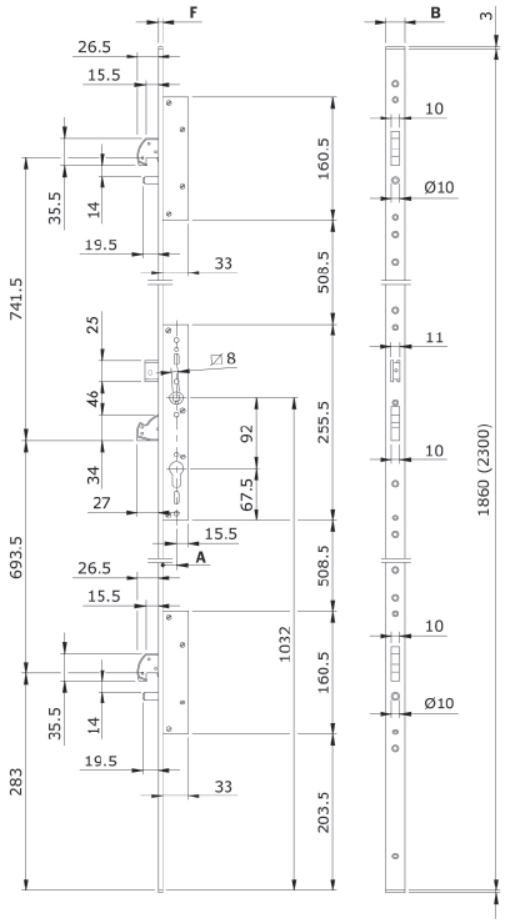







Code							
Art		E		A	S	B	F
79**	10	25	2	22	37.5	24	3
		30		27	42.5		
		35		32	47.5		
		40		37	52.5		


Code							
Art.		E		A	S	B	F
79**	00	25	2	18	33.5	24	6
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		
	01	25		18	33.5		
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		

Code							
Art.		E		A	S	B	F
79**	50	25	0	18	33.5	22	7
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		


Multiblindo three-point mortice lock for metal frames, **deviators with rotating deadbolt and pin**.
Central lock, centre distance 92 mm, operating with European profile cylinder.
Rotating deadbolt, 27 mm throw with antidrill/anticut cover plates in hardned steel.
Supplied with reversible and adjustable latchbolt. The latchbolt can be replaced with roller or cap for deadlocking only.
Latchbolt/roller operated by key or 8 mm handle follower.
2 lateral-locking deviators, assembled, with rotating deadbolt 27 mm throw
with antidrill/anticut cover plates in carbonitrided steel.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Matching accessories:
Extension with rotating hook deviators and pin, **U front plate** 79X300002
Extension with rotating hook deviators and pin, **flat front plate**79X310002
Long strike plates cod. 032604, 032605, 03606, 032607
Long strike plates for Extension cod. 032622, 032623
Long strike plates for semi-fixed secondary leaf cod. 032612, 032614, 03618, 032619
Long strike plates for Extensions on semi-fixed secondary leaf cod. 032628
Modular roller for latchbolt hole - ref. 040801/2/3/4/11/12/13/14/15
Modular cap for latchbolt hole - ref. 040810 ref. 040816
Cylinder escutcheon - ref. 040809 - ref. 98.05.04/05/06
Anti-drill plate - ref. 040805. 25/30/35/40/45/50/55/60/65


Multiblindo Classic 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. Backset mm 25	**795500252**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 30	**795500302**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 35	**795500352**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 40	**795500402**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 45	**795500452**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 50	**795500502**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 55	**795500552**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 60	**795500602**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. Backset mm 65	**795500652**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 25	**795501252**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 30	**795501302**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 35	**795501352**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 40	**795501402**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 45	**795501452**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 50	**795501502**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 55	**795501552**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 60	**795501602**	1	-	1
U-front plate mm **1860x24x6** in stainless steel. Backset mm 65	**795501652**	1	-	1




U-front plate mm **2300x24x5** in stainless steel. Backset mm 25	**795530252**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 30	**795530302**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 35	**795530352**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 40	**795530402**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 45	**795530452**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 50	**795530502**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 55	**795530552**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 60	**795530602**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. Backset mm 65	**795530652**	1	-	1



Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 25	**795510252**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 30	**795510302**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 35	**795510352**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 40	**795510402**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 45	**795510452**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 50	**795510502**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 55	**795510552**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 60	**795510602**	1	-	1
Flat front-plate mm **2300x24x3** in stainless steel. Backset mm 65	**795510652**	1	-	1

Multiblindo Classic 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 25	**795550250**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 30	**795550300**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 35	**795550350**	1	-	1
U-front plate mm **2300x22x7** in BLACK PAINTED aluminium. Backset mm 40	**795550400**	1	-	1


ISEO
ULTIMATE ACCESS TECHNOLOGIES


CSI

Code | Single package | Multiple package | Min. ord.

Blindo 92 mm centre distance



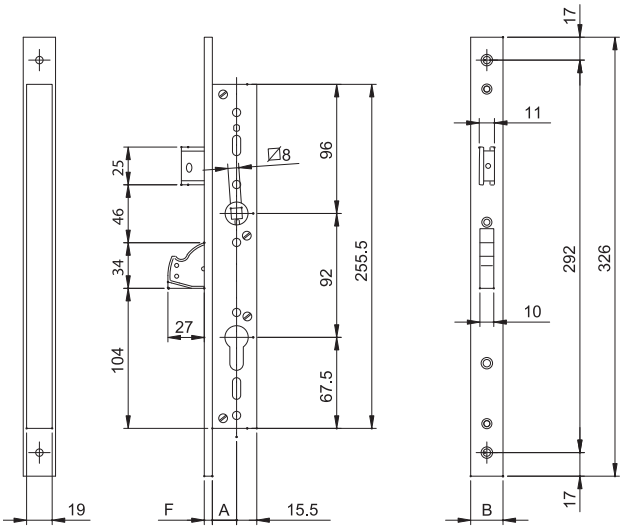

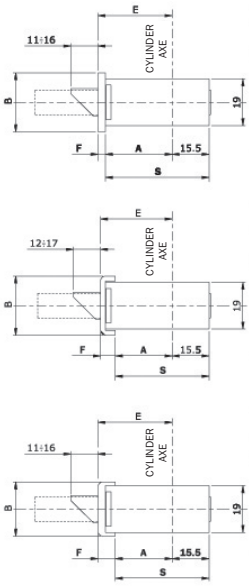


Code							
Art.		E		A	S	B	F
7911	10	25	2	22	37.5	24	3
		30		27	42.5		
		35		32	47.5		
		40		37	52.5		

Code							
Art.		E		A	S	B	F
7911	00	25	2	18	33.5	24	6
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		


Code							
Art.		E		A	S	B	F
7911	50	25	0	18	33.5	22	7
		30		23	38.5		
		35		28	43.5		
		40		33	48.5		

Blindo mortice lock for metal frames, lateral locking, **rotating deadbolt**.
Centre distance 92 mm, operating with European profile cylinder.
Rotating deadbolt, 27 mm throw, with antidrill/anticut cover plates in carbonitrided steel.
Supplied with reversible and adjustable latchbolt. The latchbolt can be replaced with roller or cap for deadlocking only. Latchbolt/roller operated by key or 8 mm handle follower. Cylinder screw.
2 nylon end blocks for U-version. Instruction sheet.

Matching accessories:
Striking plates
Modular roller for latchbolt hole - ref. 040801/2/3/4
Cylinder escutcheon - ref. 040809
Antidrill plate - ref. 040805. 25/30/35/40




U-front plate mm **326x24x6** in stainless steel. Backset mm 25	**791100252**	1	10	10
U-front plate mm **326x24x6** in stainless steel. Backset mm 30	**791100302**	1	10	10
U-front plate mm **326x24x6** in stainless steel. Backset mm 35	**791100352**	1	10	10
U-front plate mm **326x24x6** in stainless steel. Backset mm 40	**791100402**	1	10	10




U-front plate mm **326x24x5** in stainless steel. Backset mm 25	**791133252**	1	10	10
U-front plate mm **326x24x5** in stainless steel. Backset mm 35	**791133352**	1	10	10
U-front plate mm **326x24x5** in stainless steel. Backset mm 40	**791133402**	1	10	10


Blindo 92 mm centre distance



	Code		Single package	Multiple package	Min. ord.
Flat front-plate mm **326x24x3** in stainless steel. Backset mm 25	**791110252**		1	10	10
Flat front-plate mm **326x24x3** in stainless steel. Backset mm 30	**791110302**		1	10	10
Flat front-plate mm **326x24x3** in stainless steel. Backset mm 35	**791110352**		1	10	10
Flat front-plate mm **326x24x3** in stainless steel. Backset mm 40	**791110402**		1	10	10





Flat front-plate mm **326x22x3** in stainless steel. Backset mm 25	**791112252**		1	10	10
Flat front-plate mm **326x22x3** in stainless steel. Backset mm 30	**791112302**		1	10	10
Flat front-plate mm **326x22x3** in stainless steel. Backset mm 35	**791112352**		1	10	10
Flat front-plate mm **326x22x3** in stainless steel. Backset mm 40	**791112402**		1	10	10





U-front plate mm **326x22x7** in BLACK PAINTED aluminium. Backset mm 25	**791150250**		1	10	10
U-front plate mm **326x22x7** in BLACK PAINTED aluminium. Backset mm 30	**791150300**		1	10	10
U-front plate mm **326x22x7** in BLACK PAINTED aluminium. Backset mm 35	**791150350**		1	10	10
U-front plate mm **326x22x7** in BLACK PAINTED aluminium. Backset mm 40	**791150400**		1	10	10

Accessories

	Code	Single package	Multiple package	Min. ord.
 Modular roller for Multiblindo and Blindo with a nylon insert for fixed striking plate and a nylon insert for adjustable striking plate. It can replace the latchbolt.				
For lock backset mm 25	**040801**	10	-	10
For lock backset mm 30	**040802**	10	-	10
For lock backset mm 35	**040803**	10	-	10
For lock backset mm 40	**040804**	10	-	10
For lock backset mm 45	**040811**	10	-	10
For lock backset mm 50	**040812**	10	-	10
For lock backset mm 55	**040813**	10	-	10
For lock backset mm 60	**040814**	10	-	10
For lock backset mm 65	**040815**	10	-	10
 Modular cap for Multiblindo and Blindo for backsets from 25 mm to 65 mm. In nylon. To be fitted instead of the latchbolt for only deadbolt versions. Screw.	**040816**	10	-	10
 Modular antidrill plate for Multiblindo and Blindo.				
For lock backset mm 25	**040805.25**	5	-	10
For lock backset mm 30	**040805.30**	5	-	10
For lock backset mm 35	**040805.35**	5	-	10
For lock backset mm 40	**040805.40**	5	-	10
For lock backset mm 45	**040805.45**	5	-	10
For lock backset mm 50	**040805.50**	5	-	10
For lock backset mm 55	**040805.55**	5	-	10
For lock backset mm 60	**040805.60**	5	-	10
For lock backset mm 65	**040805.65**	5	-	10
 Upper striker for Multiblindo, vertical locking. 2 tip-guiding plates Ø mm 14. Rod-guiding nylon spacer.	**040806**	10	-	10
 Brass floor socket with antidust spring cap for rods. Inside hole Ø mm 18. For Multiblindo tip bolt.	**040807**	10	-	10

Accessories

	Code	Single package	Multiple package	Min. ord.
 Multi-faceted Ø mm 14 TIP for threaded rods M8. For Multiblindo. In zinc-plated carbonitrided steel. Elastic pin. Drawing pin.	**040808**	10	-	10
  Modular escutcheon for Multiblindo and Blindo, European profile cylinder, internal fixing. Internal and external escutcheons in aluminium. External plate and antidrill disk in carbonitrided steel. Plate spacer. Spacers. Antidrill balls for screw protection. Screws. BLACK PAINTED	**040809**	1	-	1
Modular escutcheon for Multiblindo and Blindo, European profile cylinder, internal fixing. Internal and external escutcheons in aluminium. External plate and antidrill disk in carbonitrided steel. Plate spacer. Spacers. Anti-drill balls for screw protection. Screws. RAW ALUMINIUM	**040809G**	1	-	1









Escutcheons and cylinders protection in tempered steel, internal escutcheon in nylon and fixing screw included.

latch projection 16 mm - NICHEL MATT	**0000098050204**	6	-	6
latch projection 16 mm - BLACK ELECTROPAINTED	**0000098050205**	6	-	6
latch projection 16 mm - POLISHED BRASS VARNISHED	**0000098050206**	6	-	6
latch projection 12 mm - NICHEL MATT	**0000098050104**	6	-	6
latch projection 12 mm - BLACK VARNISHED	**0000098050105**	6	-	6
latch projection 12 mm - POLISHED BRASS VARNISHED	**0000098050106**	6	-	6

ISEO ULTIMATE ACCESS TECHNOLOGIES

Multipunto Multiblindo Classic. Combinations: strike plates, extensions, accessories.

	one leaf door H<2300		semi-fixed secondary leaf H<2300	one leaf door 2300<H<3220		semi-fixed secondary leaf 2300<H<3220
						
A MULTIBLINDO	795*; 799*	795*; 799*	795*; 799*	795*; 799*	795*; 799*	795*; 799*
B EXTENSIONS				7AX300002; 7AX310002	7AX300002; 7AX310002	7AX300002; 7AX310002
MULTIPLE STRIKE PLATES	C **CENTRAL LOCK STRIKE PLATES:** **033160; 033161; 033162; 033163; 038079; 038085; 038088; 038091; 038094; 038097** CLOSED for MULTIBLINDO with mechanical striker 040890 or electric striker 040900-040910: **033173; 033174; 033175; 033176** Adjustable mechanical striker 040890 can be used with Multiblindo central strike plates: **033160; 033161; 033162; 033163; 033173; 033174; 033175; 033176**			C **CENTRAL LOCK STRIKE PLATES:** **033160; 033161; 033162; 033163; 038079; 038085; 038088; 038091; 038094; 038097** CHIUSA per MULTIBLINDO con incontro meccanico 040890 o incontro elettrico 040900-040910: **033173; 033174; 033175; 033176** Incontro meccanico regolabile 040890 abbinabile a contropiastre centrali Multiblindo: **033160; 033161; 033162; 033163; 033173; 033174; 033175; 033176**		
	D **DEVIATORS STRIKE PLATES** **033168; 033169; 033170; 033171; 033181; 033182; 033183; 033184; 038089; 038090; 038092; 038093; 038095; 038096; 038098; 038099;** **0033164; 033165; 033168** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **DEADBOLT** **033166; 033167; 033171;** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **DEADBOLT** **033178; 033181; 033182** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **HOOK** **0033183; 033184** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **HOOK**			D H **DEVIATORS STRIKE PLATES:** **033168; 033169; 033170; 033171; 033181; 033182; 033183; 033184; 038089; 038090; 038092; 038093; 038095; 038096; 038098; 038099;** **0033164; 033165; 033168** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **DEADBOLT** **033166; 033167; 033171;** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **DEADBOLT** **033178; 033181; 033182** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **HOOK** **0033183; 033184** PAIR OF ADJUSTABLE CLOSED STRIKE PLATES TOP/BOTTOM **HOOK**		
SINGLE FULL-LENGTH STRIKE PLATES		E **UNIQUE STRIKE PLATES:** 032604; 032605; 032606; 032607;			E **UNIQUE STRIKE PLATES:** 032604; 032605; 032606; 032607;	
					I **UNIQUE STRIKE PLATES FOR EXTENSIONS:** 032622; 032623;	I **UNIQUE STRIKE PLATES FOR EXTENSIONS:** 032628; 032629;
SINGLE FULL-LENGTH STRIKE PLATES WITH ESPAGOLETTE			F **UNIQUE STRIKE PLATES WITH ESPAGNOLETTE:** 032612; 032614; 032618; 032619;			F **UNIQUE STRIKE PLATES WITH ESPAGNOLETTE:** 032612; 032614; 032618; 032619;
			G **ROD STRIKES FOR PINS AND FLOOR SOCKETS:** 032154; 032164;			G **ROD STRIKES FOR PINS AND FLOOR SOCKETS:** 032154; 032164;


= underlined code, U-front plate

^ = Rods and rod strikes kit 032154 to be ordered separately

CSI


Code | Single package | Multiple package | Min. ord.

Multiblindo Classic

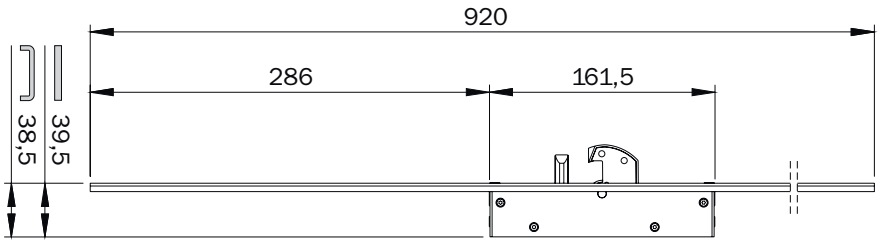

Extension
Ambidextrous extension with rotating hook deviator for Multiblindo Classic.
The extension allows the Multiblindo lock to be fitted on doors up to 3220 mm.
Rotating hook and pivot pin 15.5 mm spindle 26.5 mm with cover plates in anti-drill and anti-cut hardened steel.
Matching accessories: strike plates

U front plate **24X6X920**	**79X300002**	1	-	1
Flat front plate **24X3X920**	**79X310002**	1	-	1

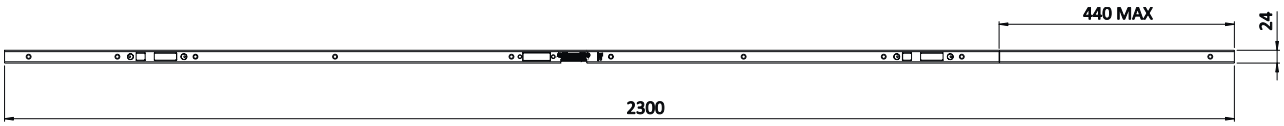


Long strike plate for one leaf door in stainless steel for Multiblindo Classic

U front plate 24X6X2300 RIGHT	**032604**	1	-	1
U front plate 24X6X2300 LEFT	**032605**	1	-	1
Flat front-plate 24X3X2300 RIGHT	**032606**	1	-	1
Flat front-plate 24X3X2300 LEFT	**032607**	1	-	1

Multiblindo Classic


	Code	Single package	Multiple package	Min. ord.



Long strike plate Extensions in stainless steel for Multiblindo Classic

U front plate **24X6X920**	**032622**	1	-	1
Flat front-plate **24X3X920***	**032623**	1	-	1

* Can also be used with long strike plate Extensions for semi-fixed secondary leaf and flat front plate

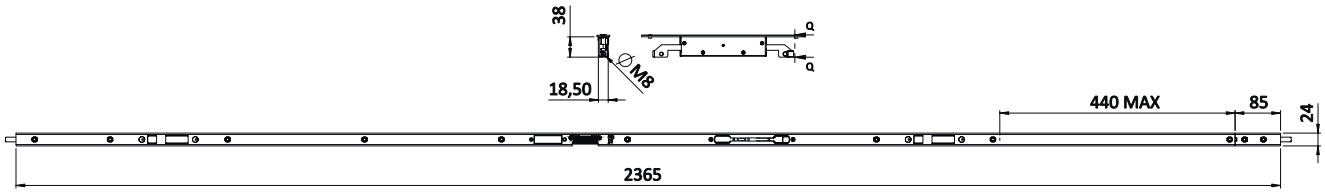


Long strike plate for semi-fixed secondary leaf with U-front plate in stainless steel and manual lever espagnolette for Multiblindo Classic*

U front plate **24X6X2300** RIGHT	**032612**	1	-	1
U front plate **24X6X2300** LEFT	**032614**	1	-	1

* Kit includes external rods, high and low pins and rod strikes for pins


Multiblindo Classic

		Code	Single package	Multiple package	Min. ord.



Long strike plate for semi-fixed secondary leaf with U-front plate in stainless steel and manual lever espagnolette for Multiblindo Classic







Flat front-plate **24X3X2300** RIGHT	**032618**	1	-	1
Flat front-plate **24X3X2300** LEFT	**032619**	1	-	1



Long strike plate Extensions for semi-fixed secondary leaf in stainless steel for Multiblindo Easy/Easy Exit and Emotion/Emotion Exit

U front plate **24X6X920**	**032628**	1	-	1

Accessories

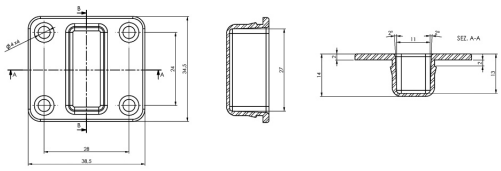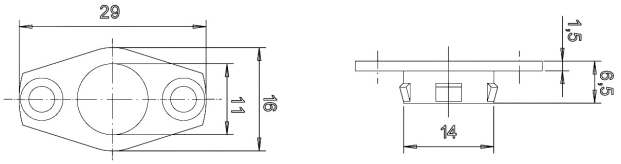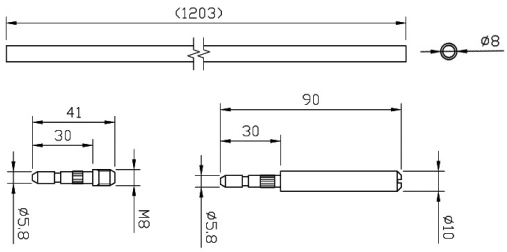	Code	Single package	Multiple package	Min. ord.
  **Rod hasp top**	**032154**	-	10	10
  **Floor strike cup**	**032164**	-	10	10
  **Rod hasp bottom**	**032174**	-	10	10
  **Rods for counterlock/flush bolt M8 complete with tips**	**032184**	1	-	1
 **Rods extension for counterlock/flush bolt** L= 3400	**0321A4**	1	-	1


Accessories

	Code	Single package	Multiple package	Min. ord.
 Steel **plate for bottom rod hasp,** to be fixed on **reversible secondary leafs**	**032704**	-	10	10


Multiblindo Classic

Code | Single package | Multiple package | Min. ord.

Full-size scale




Closed adjustable striking stainless steel plate for **central lock** Multiblindo. Material: stainless steel.
Flat front plate **220x24x3**. Can be used with mechanical striker 040890 or electric striker 040900-040910.

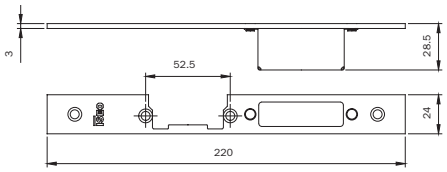


ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
DOMAL Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
PASSERINI Ekip Blindo
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT

DIN LEFT — **033160** — 1 — 10 — 10

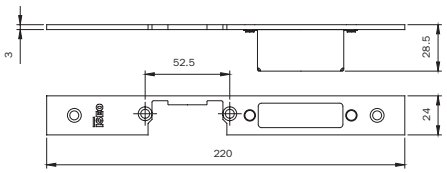


DIN RIGHT — **033161** — 1 — 10 — 10

Full-size scale




Closed adjustable striking plate for **central lock** Multiblindo. Material: stainless steel.
U-front plate **220x24x6**. Can be used with mechanical striker 040890 or electric striker 040900-040910.

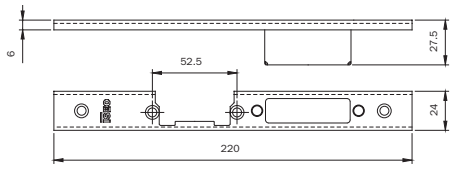

ALCAN Abithal Keeper Porta 53-60 / 61-68
Abithal Porta / Winner Porta
ALCOA FB 12 Blindato Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALNOR Montreal Porta
ALUSUISSE Alsec 2000 Porta 59 / Alsec 2000 Porta 69
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
BODEGA Extrablind 70
DOMAL Domal Break 52 Porta / Domal Break 70 Porta
Security Porta / Shops Porta / Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / 70 Porta 2 Ante
FRESIA Global 48 Porta
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta
NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
NEW TEC New Tec 50 Porta Complanare
OCMA SV 47 Porta 1 Anta
SV 62 Porta 1 Anta
SV 62 TT Porta 1 Anta
PASSERINI Ekip Blindo
Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht TH 60/68 Porta 1 Anta
Ekip Maastricht TH 60/68 Porta 2 Ante
Ekip Thermo 53 Porta
PROFILATI PE " Eku 53" Porta
PE "Eku 64 TT " Porta
PE "Eku 72 Tt " Porta
Sistema 1 PE 40 Complanare /Esterno 2 Ante
Sistema 1 PE 40 Sormonto 2 Ante
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT
WICONA L60-A / L70-A

DIN LEFT — **033162** — 1 — 10 — 10

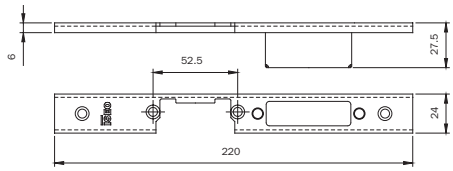


DIN RIGHT — **033163** — 1 — 10 — 10

ISEO ULTIMATE ACCESS TECHNOLOGIES

Multiblindo Classic

Code	Single package	Multiple package	Min. ord.

Full-size scale

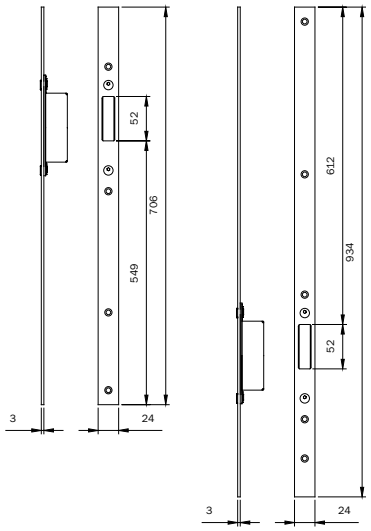


ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
DOMAL Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
PASSERINI Ekip Blindo
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT

Pair of **adjustable** closed striking plates for top/bottom **deadbolt deviators**
Multiblindo. Material: stainless steel.
Flat front plate **1860x24x3**.
Can be used with central striking plates 033160-033161

033164 | 1 | 10 | 10

Full-size scale

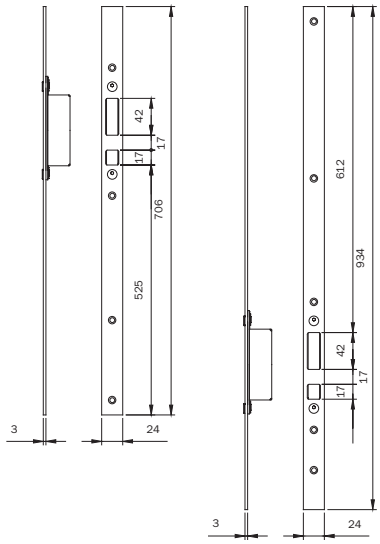


ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
DOMAL Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
PASSERINI Ekip Blindo
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT

Pair of **adjustable** closed striking plates for top/bottom **Hook deviators** Multiblindo. Material: stainless steel.
Flat front plate **1860x24x3.**
Can be used with central striking plates 033160-033161

033165 | 1 | 10 | 10

Multiblindo Classic

Full-size scale

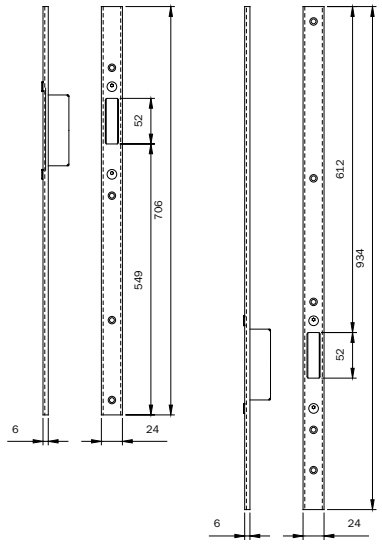


Pair of **adjustable** closed striking plates for top/bottom **deadbolt deviators** Multiblindo.
Material: stainless steel. U-front plate **1860x24x6**.
Can be used with central striking plates 033162-033163

ALCAN Abithal Keeper Porta 53-60 / 61-68
Abithal Porta / Winner Porta
ALCOA FB 12 Blindato Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALNOR Montreal Porta
ALUSUISSE Alsec 2000 Porta 59 / Alsec 2000 Porta 69
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
BODEGA Extrablind 70
DOMAL Domal Break 52 Porta / Domal Break 70 Porta
Security Porta / Shops Porta / Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / 70 Porta 2 Ante
FRESIA Global 48 Porta
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
NEW TEC New Tec 50 Porta Complanare
OCMA SV 47 Porta 1 Anta
SV 62 Porta 1 Anta
SV 62 TT Porta 1 Anta
PASSERINI Ekip Blindo
Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht TH 60/68 Porta 1 Anta
Ekip Maastricht TH 60/68 Porta 2 Ante
Ekip Thermo 53 Porta
PROFILATI PE " Eku 53" Porta
PE "Eku 64 TT " Porta
PE "Eku 72 Tt " Porta
Sistema 1 PE 40 Complanare /Extérieur 2 Ante
Sistema 1 PE 40 Sormonto 2 Ante
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT
WICONA L60-A / L70-A

Code	Single package	Multiple package	Min. ord.
033166	1	10	10

Full-size scale

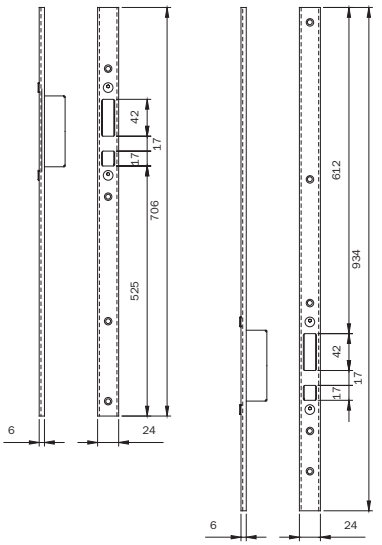

Pair of **adjustable** closed striking plates for top/bottom **hook deviators** Multiblindo.
Material: stainless steel.
U-front plate **1860x24x6**.
Can be used with central striking plates 033162-033163


ALCAN Abithal Keeper Porta 53-60 / 61-68
Abithal Porta / Winner Porta
ALCOA FB 12 Blindato Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALNOR Montreal Porta
ALUSUISSE Alsec 2000 Porta 59 / Alsec 2000 Porta 69
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
BODEGA Extrablind 70
DOMAL Domal Break 52 Porta / Domal Break 70 Porta
Security Porta / Shops Porta / Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / 70 Porta 2 Ante
FRESIA Global 48 Porta
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
NEW TEC New Tec 50 Porta Complanare
OCMA SV 47 Porta 1 Anta
SV 62 Porta 1 Anta
SV 62 TT Porta 1 Anta
PASSERINI Ekip Blindo
Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht TH 60/68 Porta 1 Anta
Ekip Maastricht TH 60/68 Porta 2 Ante
Ekip Thermo 53 Porta
PROFILATI PE " Eku 53" Porta
PE "Eku 64 TT " Porta
PE "Eku 72 Tt " Porta
Sistema 1 PE 40 Complanare /Extérieur 2 Ante
Sistema 1 PE 40 Sormonto 2 Ante
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT
WICONA L60-A / L70-A

Code	Single package	Multiple package	Min. ord.
033167	1	10	10

Multiblindo Classic

Full-size scale


Adjustable closed striking plate for Multiblindo. Material: stainless steel. Flat front plate **180x24x3**. Can be used with central striking plates 033160-033161

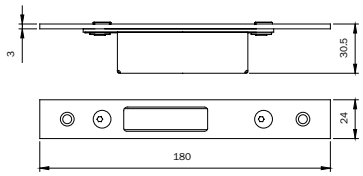

ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
DOMAL Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
PASSERINI Ekip Blindo
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT

	Code	Single package	Multiple package	Min. ord.
DEADBOLT DEVIATORS	**033168**	1	10	10


Full-size scale

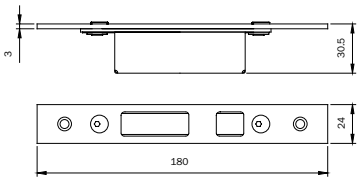

	Code	Single package	Multiple package	Min. ord.
HOOK DEVIATORS	**033169**	1	10	10

Full-size scale


Adjustable closed striking plate for Multiblindo. In INOX U-front plate **180x24x6**. Can be used with striking plates 033162-033163.

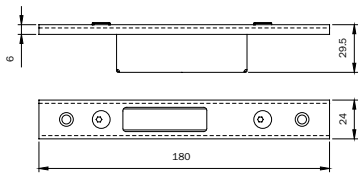

ALCAN Abithal Keeper Porta 53-60 / 61-68
Abithal Porta / Winner Porta
ALCOA FB 12 Blindato Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO All.Co 5 Porta / All.Co 5 TT Porta
Export 50/50 TT Porta / Sicurblin 65
ALNOR Montreal Porta
ALUSUISSE Alsec 2000 Porta 59 / Alsec 2000 Porta 69
ALU-K Alublindo / N 45 Porta / N 53 Porta / N 55 TT Porta
N 62 TT Porta
ALU-MEC Synthesis 57 Porta / Synthesis 60TT Porta
BODEGA Extrablind 70
DOMAL Domal Break 52 Porta / Domal Break 70 Porta
Security Porta / Shops Porta / Stopper PG Porta
ESA Blindal 60 Porta 1 Anta / 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / 70 Porta 2 Ante
FRESIA Global 48 Porta
INDINVEST Alpha 445 Porta 2 Ante
METRA NC 45 International Porta
NC 45 Superthermic Porta / NC 55 International Porta
NC 68 Superthermic Porta / Nuovo NC 50 Porta
Superblindo
NEW TEC New Tec 50 Porta Complanare
OCMA SV 47 Porta 1 Anta
SV 62 Porta 1 Anta
SV 62 TT Porta 1 Anta
PASSERINI Ekip Blindo
Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht TH 60/68 Porta 1 Anta
Ekip Maastricht TH 60/68 Porta 2 Ante
Ekip Thermo 53 Porta
PROFILATI PE " Eku 53" Porta
PE "Eku 64 TT " Porta
PE "Eku 72 Tt " Porta
Sistema 1 PE 40 Complanare /Esterno 2 Ante
Sistema 1 PE 40 Sormonto 2 Ante
SCHÜCO Royal 78 ST Blindato
Royal S 50 N
Royal S 55 TT
Royal S 65 TT
WICONA L60-A / L70-A

	Code	Single package	Multiple package	Min. ord.
DEADBOLT DEVIATORS	**033170**	1	10	10


Full-size scale

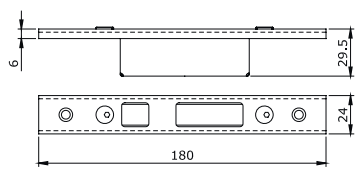


	Code	Single package	Multiple package	Min. ord.
HOOK DEVIATORS	**033171**	1	10	10

Multiblindo Classic


Full-size scale



Closed adjustable striking plate for **central lock** Multiblindo. Material: stainless steel.
Flat front plate **220x22x3**.
Can be used with mechanical striker 040890 or electric striker 040900-040910.

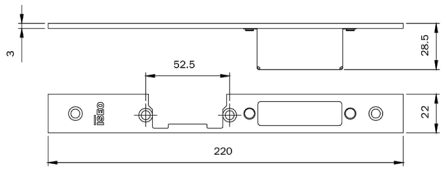

DIN LEFT

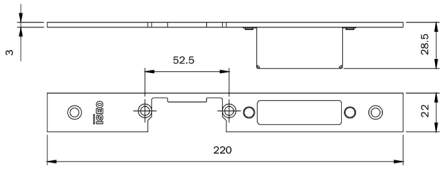


DIN RIGHT


ALCAN: Abithal Cristal / Abithal Keeper porta C.E. / Winner finestra
ALCOA: FB 12 GA / Europa GA / FB 12 TT / R 35 RÉVERSIBLE R 35 sormonto
ALL.CO: All.Co 5 complanare / Export 40 finestra Export 45 TT finestra / Export 50 finestra / Export 50 TT finestra Final 40 finestra / Ites P4 complanare / Sicurblin C.E.
ALNOR: Blindo Block / Montreal G.A.
ALU-K: N53 complanare / N 55 TT complanare
ALU-MEC: Synthesis 45 finestra / Synthesis 57 finestra Synthesis 60 TT finestra
ALUSUISSE: Alsec 2000 finestra 59 / Alsec 2000 finestra 69
BODEGA: BGA 50 / New BT 60
DOMAL: Domal Break 52 finestra / Domal Break 70 finestra Domal Stopper PG finestra
EQUIPE: Sistema 8000 G.A. finestra 1 anta Sistema 8000 G.A. finestra 2 ante / Sistema 8000 TT finestra 1 anta Sistema 8000 TT finestra 2 ante
ESA: Giuntall complanare / Giuntall porta / Isola porta
ESEDRA: GA 53 porta / TT 63 porta / TT 75 porta
INDINVEST: Alpha 255 complanare Alpha 370 TT complanare Alpha 445 finestra / Alpha 445 porta 1 anta Alpha 658 TT complanare / Alpha Blitz 2000 Alpha Globo 45 / Alpha Globo 55 / Gold 400 complanare Gold 400 sormonto / Gold 500 complanare / Gold 500 sormonto / Gold 600 complanare / Gold 600 sormonto
METRA: NC 45 International finestra / NC 45 Superthermic finestra NC 55 International finestra / NC 68 Superthermic finestra Nuovo NC 40 complanare / Nuovo NC 40 sormonto 2 ante Nuovo NC 50 complanare
MORELLI: MA 8300
OCMA: FC 47 finestra / FC 55 finestra / FC 60 TT finestra
PASSERINI: Ekip 40 complanare 2 ante Ekip 40 evoluzione 2 ante Ekip 40 sormonto 2 ante / Ekip 50 complanare 2 ante Ekip 50 sormonto 2 ante / Ekip Maastricht 53 finestra Ekip Maastricht TH 60 finestra / Ekip Maastricht TH 68 finestra Ekip Thermo 53 finestra 2 ante
PROFILATI: PE Eku 53 finestra" / PE Eku 64 TT" finestra" PE Eku 72 TT" finestra" / Sistema 1 PE 50 comp. est. 2 ante Sistema 1 PE 50 sormonto 2 ante

	Code	Single package	Multiple package	Min. ord.
DIN LEFT	033173	1	10	10
DIN RIGHT	033174	1	10	10


Full-size scale



Closed adjustable striking plate for **central lock** Multiblindo. Material: **ALUMINIUM**.
U-front plate **220x22x7**. Can be used with mechanical striker 040890 or electric striker 040900-040910.

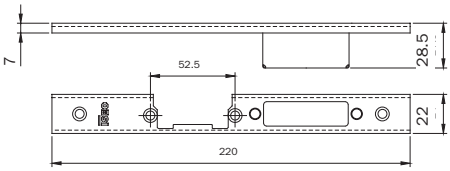

DIN LEFT

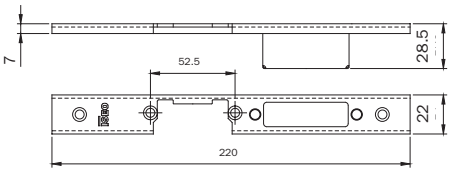

DIN RIGHT

ALCAN : Abithal Keeper porta 53-60 / 61-68 Abithal porta / Winner orta
ALCOA : FB 12 Blindato porta Plana 1 anta / Plana 2 ante
ALL.CO : All.co 5 porta / All.co 5 TT porta Export 50/50 TT porta / Sicurblin 65
ALNOR : Montreal porta
ALUSUISSE : Alsec 2000 porta 59 / Alsec 2000 porta 69
ALU-K : Alublindo / N 45 porta / N 53 porta / N 55 TT porta N 62 TT porta
ALU-MEC : Synthesis 57 porta / Synthesis 60TT porta
BODEGA : Extrablind 70
DOMAL : Domal Break 52 porta / Domal Break 70 porta Security porta / Shops porta / Stopper PG porta
ESA : Blindal 60 porta 1 anta / 60 porta 2 ante Blindal 70 porta 1 anta / 70 porta 2 ante
FRESIA : Global 48 porta
INDINVEST : Alpha 445 porta 2 ante
METRA : NC 45 International porta NC 45 Superthermic porta NC 55 International porta NC 68 Superthermic porta / Nuovo NC 50 porta Superblindo
NEW TEC : New Tec 50 porta complanare
OCMA : SV 47 porta 1 anta / SV 47 porta 2 ante SV 62 porta 1 anta / SV 62 porta 2 ante SV 62 TT porta 1 anta / SV 62 TT porta 2 ante
PASSERINI : Ekip Blindo Ekip Maastricht 53 porta 1 anta Ekip Maastricht 53 porta 2 ante Ekip Maastricht TH 60/68 porta 1 anta Ekip Maastricht TH 60/68 porta 2 ante Ekip Thermo 53 porta
PROFILATI : PE " Eku 53" porta PE "Eku 64 TT " porta PE "Eku 72 TT " porta Sistema 1 PE 40 complanare /esterno 2 ante Sistema 1 PE 40 sormonto 2 ante
SCHÜCO : Royal 78 ST blindato Royal S 50 N Royal S 55 TT Royal S 65 TT
WICONA : L60-A / L70-A

	Code	Single package	Multiple package	Min. ord.
DIN LEFT	033175	1	1	10
DIN RIGHT	033176	1	1	10

Multiblindo Classic









Full-size scale




ALCAN: Abithal Cristal / Abithal Keeper porta C.E. / Winner finestra
ALCOA: FB 12 GA / Europa GA / FB 12 TT / R 35 RÉVERSIBLE
R 35 sormonto
ALL.CO: All.Co 5 complanare / Export 40 finestra
Export 45 TT finestra / Export 50 finestra / Export 50 TT finestra
Final 40 finestra / Ites P4 complanare / Sicurblin C.E.
ALNOR: Blindo Block / Montreal G.A.
ALU-K: N53 complanare / N 55 TT complanare
ALU-MEC: Synthesis 45 finestra / Synthesis 57 finestra
Synthesis 60 TT finestra
ALUSUISSE: Alsec 2000 finestra 59 / Alsec 2000 finestra 69
BODEGA: BGA 50 / New BT 60
DOMAL: Domal Break 52 finestra / Domal Break 70 finestra
Domal Stopper PG finestra
EQUIPE: Sistema 8000 G.A. finestra 1 anta
Sistema 8000 G.A. finestra 2 ante / Sistema 8000 TT finestra 1 anta
Sistema 8000 TT finestra 2 ante
ESA: Giuntall complanare / Giuntall porta / Isola porta
ESEDRA: GA 53 porta / TT 63 porta / TT 75 porta
INDINVEST: Alpha 255 complanare
Alpha 370 TT complanare
Alpha 445 finestra / Alpha 445 porta 1 anta
Alpha 658 TT complanare / Alpha Blitz 2000 / Alpha Globo 45
Alpha Globo 55 / Gold 400 complanare / Gold 400 sormonto
Gold 500 complanare / Gold 500 sormonto / Gold 600 complanare Gold
600 sormonto
METRA: NC 45 International finestra / NC 45 Superthermic finestra
NC 55 International finestra / NC 68 Superthermic finestra
Nuovo NC 40 complanare / Nuovo NC 40 sormonto 2 ante
Nuovo NC 50 complanare
MORELLI: MA 8300
OCMA: FC 47 finestra / FC 55 finestra / FC 60 TT finestra
PASSERINI: Ekip 40 complanare 2 ante / Ekip 40 evoluzione 2 ante
Ekip 40 sormonto 2 ante / Ekip 50 complanare 2 ante
Ekip 50 sormonto 2 ante / Ekip Maastricht 53 finestra
Ekip Maastricht TH 60 finestra / Ekip Maastricht TH 68 finestra
Ekip Thermo 53 finestra 2 ante
PROFILATI: "PE Eku 53 finestra" / "PE Eku 64 TT finestra"
"PE Eku 72 TT finestra"/ Sistema 1 PE 50 comp./est. 2 ante
Sistema 1 PE 50 sormonto 2 ante

	Code	Single package	Multiple package	Min. ord.
Pair of **adjustable** closed striking plates for top/bottom **Hook deviators** Multiblindo. Material: stainless steel. Flat front plate **1860x22x3.** Can be used with central striking plates 033173-033174	**033178**	1	10	10


Multiblindo Classic

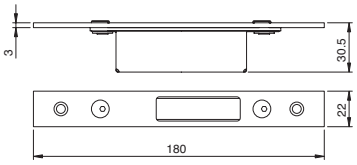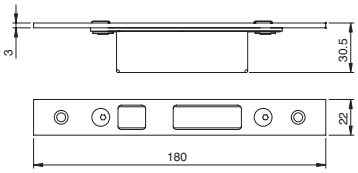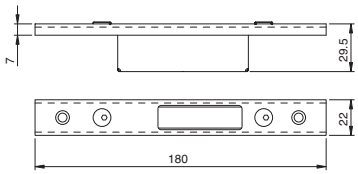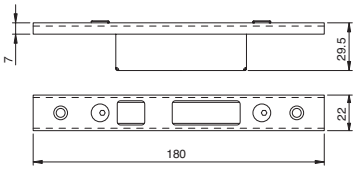	Code	Single package	Multiple package	Min. ord.
Adjustable closed striking plate Multiblindo. Material: stainless steel. Flat front plate **180x22x3**. Can be used with central striking plates 033173-033174				
Full-size scale  				
DEADBOLT DEVIATORS	**033181**	1	10	10
ALCAN : Abithal Cristal / Abithal Keeper porta C.E. / Winner finestra **ALCOA :** FB 12 GA / Europa GA / FB 12 TT / R 35 reversibile R 35 sormonto **ALL.CO :** All.Co 5 complanare / Export 40 finestra Export 45 TT finestra / Export 50 finestra / Export 50 TT finestra Final 40 finestra / Ites P4 complanare / Sicurblin C.E. **ALNOR :** Blindo Block / Montreal G.A. **ALU-K :** N53 complanare / N 55 TT complanare **ALU-MEC :** Synthesis 45 finestra / Synthesis 57 finestra Synthesis 60 TT finestra **ALUSUISSE :** Alsec 2000 finestra 59 / Alsec 2000 finestra 69 **BODEGA :** BGA 50 / New BT 60 **DOMAL :** Domal Break 52 finestra / Domal Break 70 finestra Domal Stopper PG finestra **EQUIPE :** Sistema 8000 G.A. finestra 1 anta Sistema 8000 G.A. finestra 2 ante / Sistema 8000 TT finestra 1 anta Sistema 8000 TT finestra 2 ante **ESA :** Giuntall complanare / Giuntall porta / Isola porta **ESEDRA :** GA 53 porta / TT 63 porta / TT 75 porta **INDINVEST :** Alpha 255 complanare Alpha 370 TT complanare Alpha 445 finestra / Alpha 445 porta 1 anta Alpha 658 TT complanare / Alpha Blitz 2000 / Alpha Globo 45 Alpha Globo 55 / Gold 400 complanare / Gold 400 sormonto Gold 500 complanare / Gold 500 sormonto / Gold 600 complanare Gold 600 sormonto **METRA :** NC 45 International finestra / NC 45 Superthermic finestra NC 55 International finestra / NC 68 Superthermic finestra Nuovo NC 40 complanare / Nuovo NC 40 sormonto 2 ante Nuovo NC 50 complanare **MORELLI :** MA 8300 **OCMA :** FC 47 finestra / FC 55 finestra / FC 60 TT finestra **PASSERINI :** Ekip 40 complanare 2 ante / Ekip 40 evoluzione 2 ante Ekip 40 sormonto 2 ante / Ekip 50 complanare 2 ante Ekip 50 sormonto 2 ante / Ekip Maastricht 53 finestra Ekip Maastricht TH 60 finestra / Ekip Maastricht TH 68 finestra Ekip Thermo 53 finestra 2 ante **PROFILATI :** "PE Eku 53 finestra" / "PE Eku 64 TT finestra" "PE Eku 72 TT finestra" / Sistema 1 PE 50 comp./est. 2 ante Sistema 1 PE 50 sormonto 2 ante				
Full-size scale  				
HOOK DEVIATORS	**033182**	1	10	10
Adjustable closed striking plates for top/bottom Multiblindo. Material: aluminium. U-front plate **180x22x7**. Can be used with central striking plates 033175-033176.				
Full-size scale  				
DEADBOLT DEVIATORS	**033183**	1	10	10
ALCAN : Abithal Keeper porta 53-60 / 61-68 Abithal porta / Winner orta **ALCOA :** FB 12 Blindato porta Plana 1 anta / Plana 2 ante **ALL.CO :** All.co 5 porta / All.co 5 TT porta Export 50/50 TT porta / Sicurblin 65 **ALNOR :** Montreal porta **ALUSUISSE :** Alsec 2000 porta 59 / Alsec 2000 porta 69 **ALU-K :** Alublindo / N 45 porta / N 53 porta / N 55 TT porta N 62 TT porta **ALU-MEC :** Synthesis 57 porta / Synthesis 60TT porta **BODEGA :** Extrablind 70 **DOMAL :** Domal Break 52 porta / Domal Break 70 porta Security porta / Shops porta / Stopper PG porta **ESA :** Blindal 60 porta 1 anta / 60 porta 2 ante Blindal 70 porta 1 anta / 70 porta 2 ante **FRESIA :** Global 48 porta **INDINVEST :** Alpha 445 porta 2 ante **METRA :** NC 45 International porta NC 45 Superthermic porta / NC 55 International porta NC 68 Superthermic porta / Nuovo NC 50 porta Superblindo **NEW TEC :** New Tec 50 porta complanare **OCMA :** SV 47 porta 1 anta / SV 47 porta 2 ante SV 62 porta 1 anta / SV 62 porta 2 ante SV 62 TT porta 1 anta / SV 62 TT porta 2 ante **PASSERINI :** Ekip Blindo Ekip Maastricht 53 porta 1 anta Ekip Maastricht 53 porta 2 ante Ekip Maastricht TH 60/68 porta 1 anta Ekip Maastricht TH 60/68 porta 2 ante Ekip Thermo 53 porta **PROFILATI :** PE " Eku 53" porta PE "Eku 64 TT " porta PE "Eku 72 TT " porta Sistema 1 PE 40 complanare /esterno 2 ante Sistema 1 PE 40 sormonto 2 ante **SCHÜCO :** Royal 78 ST blindato Royal S 50 N Royal S 55 TT Royal S 65 TT **WICONA :** L60-A / L70-A				
Full-size scale  				
HOOK DEVIATORS	**033184**	1	10	10

Multiblindo Classic




Full-size scale

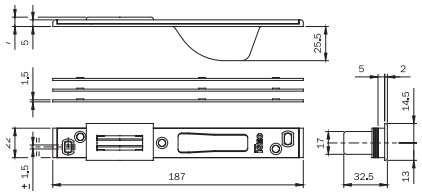


Closed striking plate for **central lock** Multiblindo. Material: stainless steel. Flat front plate **187x22x5**. With latchbolt guide and nylon roller. Spacers.
For series: 7951* - 7955* - 7971* - 7991* - 7911*.

ALCAN abithal Keeper Porta 53-60 / Abithal Keeper Porta 61-68
Abithal Porta / Winner Porta
ALCO afb 12 Blindato / Formula F40 Porta / Formula F40 Tt Porta
Formula F50 Porta / Formula F50 Tt Porta / Formula F60 Tt Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO all.Co 5 Porta / All.Co 5 Tt Porta / Export 50 Porta Export 50 Tt Porta / Sicurblin 65
ALNOR montreal Porta / Alu-kalublindo / N 45 Porta / N 53 Porta
N 55 Tt Porta / N 62 Tt Porta
ALU-MEC synthesis 57 Porta / Synthesis 60 Tt Porta
ALUSUISSE alsec 2000 Porta 59 / Alsec 2000 Porta 69
BODEGA extrablind 70
DOMAL domal Break 52 Porta / Domal Break 70 Porta
Domal Security Porta / Domal Shops Porta
Domal Stopper Pg Porta
ESA Blindal 60 Porta 1 Anta / Blindal 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / Blindal 70 Porta 2 Ante
FRESIA Global 48 Porta
INDINVEST Alpha 445 Porta 2 Ante
METRA Nc 45 International Porta / Nc 45 Superthermic Porta
Nc 55 International Porta / Nc 68 Superthermic Porta
Nuovo Nc 50 Porta / Superblindo
NEW TEC new Tec 50 Porta Complanare
New Tec 52 Tt Porta Complanare
New Tec 68 Tt Porta Complanare
OCMA fc 60 Tt Porta / Sv 47 Porta 1 Anta
Sv 47 Porta 2 Ante
Sv 62 Porta 1 Anta / Sv 62 Porta 2 Ante
Sv 62 Tt Porta 1 Anta / Sv 62 Tt Porta 2 Ante
PASSERINIekip Blindo / Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante / Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante
Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante / Ekip Thermo 53 Porta
PROFILATI "Pe Eku 53 Porta" / "Pe Eku 64 Tt Porta" "Pe Eku 72 Tt Porta" / Sistema 1 Pe 40 Comp./ Est. 2 Ante
Sistema 1 Pe 40 Sormonto 2 Ante
SCHÜCO royal 78 St Blindato / Royal S 50 N
Royal S 55 Tt / Royal S 65 Tt
WICONA l60-A / L70-A

Code	Single package	Multiple package	Min. ord.
038079	10	-	10




Full-size scale




Closed striking plate for **hook deviators** Multiblindo. Material: stainless steel. Flat front plate **141x22x5**. Spacers.
For series: 7955* - 7991*.

Code	Single package	Multiple package	Min. ord.
038083	10	-	10




Full-size scale



Closed striking plate for **deadbolt deviators** Multiblindo. Material: stainless steel. Flat front plate **141x22x5**.
For series: 7951* - 7991*.

Code	Single package	Multiple package	Min. ord.
038084	10	-	10

Multiblindo Classic

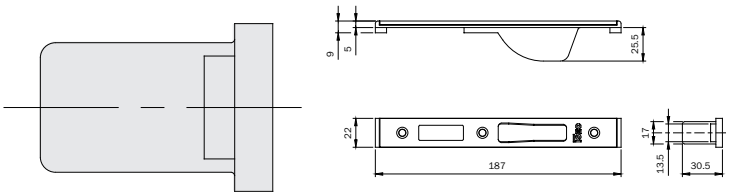


Full-size scale

Closed striking plate for **central lock**
Multiblindo. Material: stainless steel.
Flat front plate **187x22x9**.
With latchbolt guide and nylon roller. Spacers.
For series: 7951* - 7955* - 7971* - 7991* - 7911*.

ALCAN abithal Cristal / Abithal Keeper Porta C.E. / Winner Finestra
ALCOA fb 12 Ga / Europa Ga / Fb 12 T.T.
R 35 Reversibile / R 35 Sormonto
ALL.CO All.Co 5 Complanare / Export 40 Finestra
Export 45 Tt Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Ites P4 Complanare
Sicurblin C.E.
ALNOR blindo Block / Montreal G.A.
ALU-K n 53 Complanare / N 55 Tt Complanare
ALU-MEC synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
ALUSUISSE alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
BODEGA bga 50 / New Bt 60
DOMAL Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
EQUIPE sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Sistema 8000 Tt Finestra 1 Anta
Sistema 8000 Tt Finestra 2 Ante
ESA giuntall Complanare / Giuntall Porta / Isola Porta
ESEDRA ga 53 Porta / Tt 63 Porta / Tt 75 Porta
INDINVEST alpha 255 Complanare
Alpha 370 Tt Complanare
Alpha 445 Finestra / Alpha 445 Porta 1 Anta
Alpha 658 Tt Complanare / Alpha Blitz 2000 / Alpha Globo 45
Alpha Globo 55 / Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare Gold 600 Sormonto
METRA nc 45 International Finestra
Nc 45 Superthermic Finestra / Nc 55 International Finestra
Nc 68 Superthermic Finestra / Nuovo Nc 40 Complanare
Nuovo Nc 40 Sormonto 2 Ante / Nuovo Nc 50 Complanare
MORELLI ma 8300
OCMA fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
PASSERINI ekip 40 Complanare 2 Ante
Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 2 Ante / Ekip 50 Complanare 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra
Ekip Maastricht Th 68 Finestra
Ekip Thermo 53 Finestra 2 Ante
PROFILATI "Pe Eku 53 Finestra"
"Pe Eku 64 Tt Finestra"
"Pe Eku 72 Tt Finestra"
Sistema 1 Pe 50 Comp./Est. 2 Ante
Sistema 1 Pe 50 Sormonto 2 Ante


Code	Single package	Multiple package	Min. ord.
038085	10	-	10

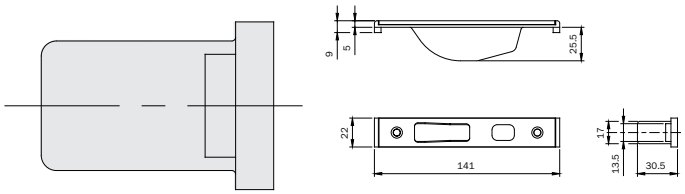

Full-size scale

Closed striking plate for **hook deviators**
Multiblindo. Material: stainless steel.
Flat front plate **141x22x9.** Spacers.
For series: 7955* - 7991*.

Code	Single package	Multiple package	Min. ord.
038086	10	-	10












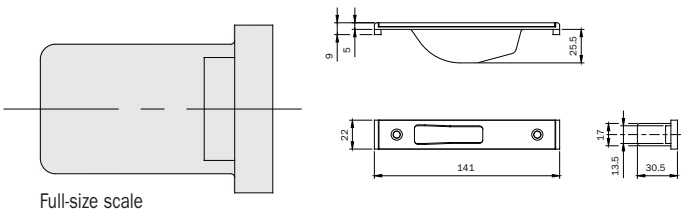


Full-size scale













Closed striking plate for **deadbolt deviators**
Multiblindo. Material: stainless steel.
Flat front plate **141x22x9.**
For series: 7951* - 7991*.

Code	Single package	Multiple package	Min. ord.
038087	10	-	10

Multiblindo Classic

		Code	Single package	Multiple package	Min. ord.
 Full-size scale	 Striking plate for **central lock** Multiblindo. Material: stainless steel. U-front plate **180x24x6**. For series: 7951* - 7955* - 7971* - 7991* - 7911*.	**038088**	10	-	10
 Full-size scale	 Striking plate for **hook deviators** Multiblindo. Material: stainless steel. U-front plate **134x24x6**. For series: 7955* - 7991*.	**038089**	10	-	10
 Full-size scale	 Striking plate for **deadbolt deviators** Multiblindo. Material: stainless steel. U-front plate **134x24x6**. For series:7951* - 7991*.	**038090**	10	-	10
 Full-size scale	 Striking plate for **central lock** Multiblindo. Material: black painted steel. U-front plate **180x22x7**. For series: 7951* - 7955* - 7971* - 7991 - 7911*.	**038091**	10	-	10
 Full-size scale	 Striking plate for **hook deviators** Multiblindo. Material: black painted steel**.** U-front plate **134x22x7**. For series: 7955* - 7991*.	**038092**	10	-	10
 Full-size scale	 Striking plate for **deadbolt deviators** Multiblindo. Material: black painted steel. U-front plate **134x22x7**. For series: 7951* - 7991*.		10	-	10
	Pair of nylon front plate **supports 22x8** for locks for metal frames with European profile cylinder and double-bit rail frames. For series: 78* - 96* - 98*.	**038019**	10	-	10

Multiblindo Classic

	Code	Single package	Multiple package	Min. ord.
 Full-size scale  Striking plate for **central lock** Multiblindo. Material: stainless steel. Flat front plate **180x24x3**. For series: 7951* - 7955* - 7971* - 7991* - 7911*.	**038094**	10	-	10
 Full-size scale  Striking plate for **hook deviators** Multiblindo. Material: stainless steel**.** Flat front plate **134x24x3**. For series: 7955* - 7991*.	**038095**	10	-	10
 Full-size scale  Striking plate for **deadbolt deviators** Multiblindo. Material: stainless steel. Flat front plate **134x24x3**. For series: 7951* - 7991*.	**038096**	10	-	10
 Full-size scale  Striking plate for **central lock** Multiblindo. Material: stainless steel. Flat front plate **180x22x3**. For series: 7951* - 7955* - 7971* - 7991* - 7911*.	**038097**	10	-	10
 Full-size scale  Striking plate for **hook deviators** Multiblindo. Material: stainless steel**.** Flat front plate **134x22x3.** For series: 7955* - 7991*.	**038098**	10	-	10
 Full-size scale  Striking plate for **deadbolt deviators** Multiblindo. Material: stainless steel. Flat front plate **134x22x3**. For series: 7951* - 7991*.	**038099**	10	-	10
 Adjustable mechanical striker for use with central striking plate Multiblindo. series 033160-033161-033162-033163-033173-033174-033175-033176.	**040890**	10	-	10



Performa

Lock with sliding deadbolt

Performa

PERFORMA by ISEO has been conceived and developed to meet the requirements of the European market by adopting two different centre distances: 85 and 92 mm. It can be operated by a European profile cylinder with straight or 45° projecting DIN cam. The top and bottom lock housings incorporate low friction chamfered sliding deadbolts providing a perfect alignement into the keeps. The unique locking action of these chamfered bolts when combined with the latest generation of profiles helps maintain weather seal compression for better thermal insulation and energy saving.


ICIM

Certificazione di Prodotto
Product Certification

Certificato N.
Certificate No. 045BE/2

ISEO SERRATURE S.p.A.
Via San Girolamo, 13
PISOGNE (BS) ITALY

SERRATURA IMPLANTE AD AZIONAMENTO MECCANICO AD INGRANAGGI CON CILINDRO A PROFILO EUROPEO
MECHANICALLY OPERATED MORTICE DEAD LOCK WITH EUROPEAN CYLINDER

Serie / Series: PERFORMA MULTIPUNTO

Modelli / Models:
723, 72E

pr EN 15685:2009 - ICIM 0609CS

3 X 8 A 0 G 6 0 3

ICIM S.p.A.

15/01/2010 | 15/01/2015 | 15/01/2019

It has been designed and tested

according to the European standards EN 12209:05 and prEN 15685:09.
It resists lateral forcing with a thrust of over 1,000 kg and a front load of over 600 kg.
The corrosion resistance is more than 240 hours in a saline environment.
Endurance: tested to over 200,000 opening and closing cycles under a 120N load.

Example of certification: multipoint lock Performa models 723 – 72E

3	X	8	A	0	G	6	0	3




It's compatible

The lockcase has a width of 15 mm and, therefore, suits any type of applications for different frames materials.

It's sealed

The lockcase is closed on all sides: this stops profile machining chips from entering the mechanism. The lock is equipped with a wheel-cam stopping device in case the cylinder is not
present into the housing of lock.



Easy locking

The gear box allows for a smoother and easier operation whilst turning the key during opening and closing.



It's solid


Version with hardened deadbolts available on demand, providing greater resistance against cutting and drilling.





It's well equipped

PERFORMA is well equipped with accessories to modify the lock: with a latch, a roller or a blanking cap for DEADBOLT only action.
Such a versatile lock makes for a streamlined stockholding.


Performa Electric lock 85 mm **centre distance**

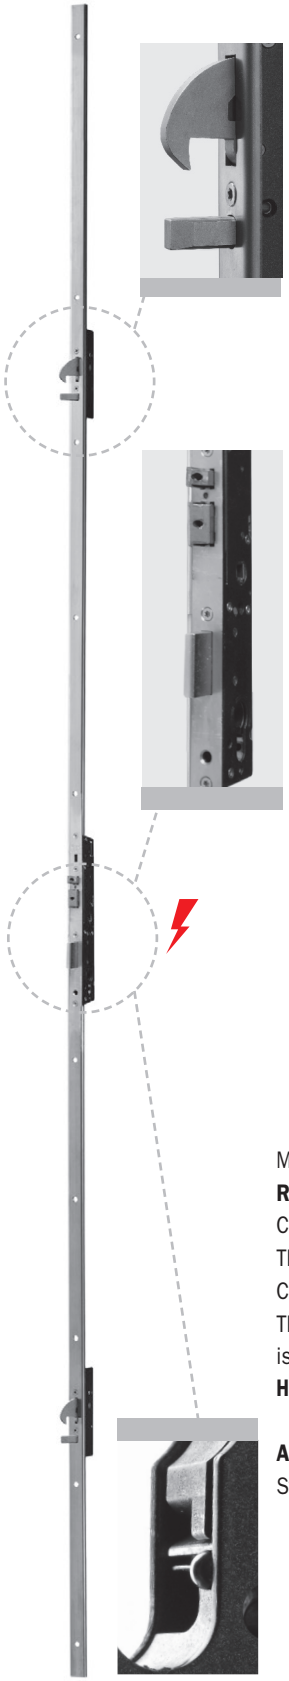

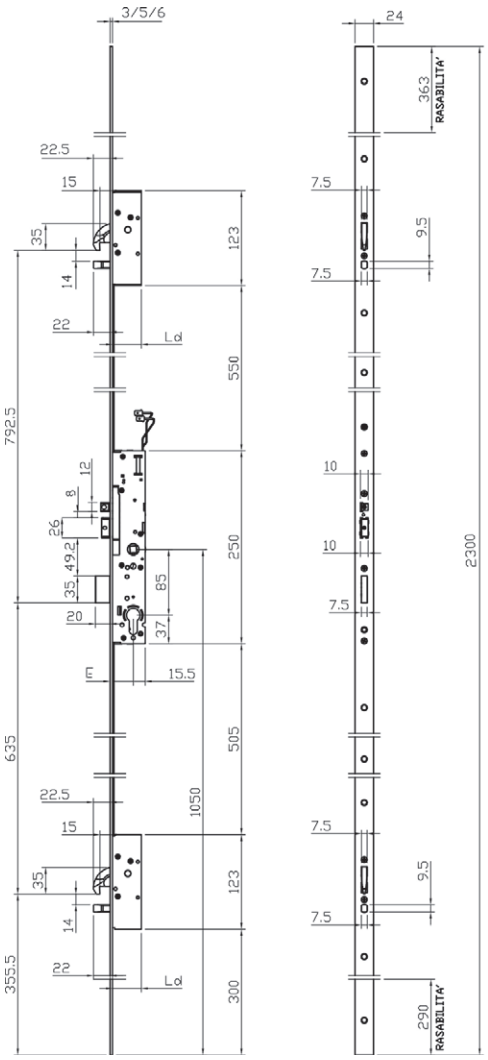




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	


Multipoint electric mortice lock for metal frames with 3 LATERAL LOCKINGS, **12Vac/dc**, 860mA, 10W.
ROTATING HOOK DEVIATORS AND SLIDING DEADBOLT LOCK.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT** 5mm, mm 8 handle follower.
Closed case for lock and deviators. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder
is not assembled into the housing of lock. **STAINLESS STEEL front**
HOLD-OPEN LEVER ON THE FRONT PLATE.

Accessories to be ordered separately:
Striking plates 038630/31/32/33/34


Performa Electric lock 85 mm **centre distance**



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 25	**72G5512528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 30	**72G5513028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 35	**72G5513528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 40	**72G5514028**	1	-	1





	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 25	**72G5532528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 30	**72G5533028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 35	**72G5533528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 40	**72G5534028**	1	-	1




	Code	Single package	Multiple package	Min. ord.
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 25	**72G5012528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 30	**72G5013028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 35	**72G5013528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 40	**72G5014028**	1	-	1


Performa Electric lock 85 mm **centre distance**

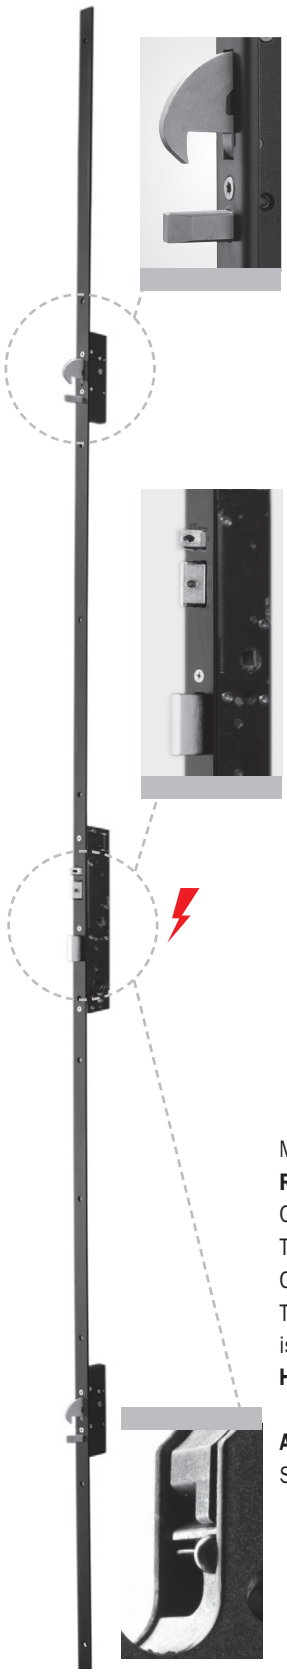

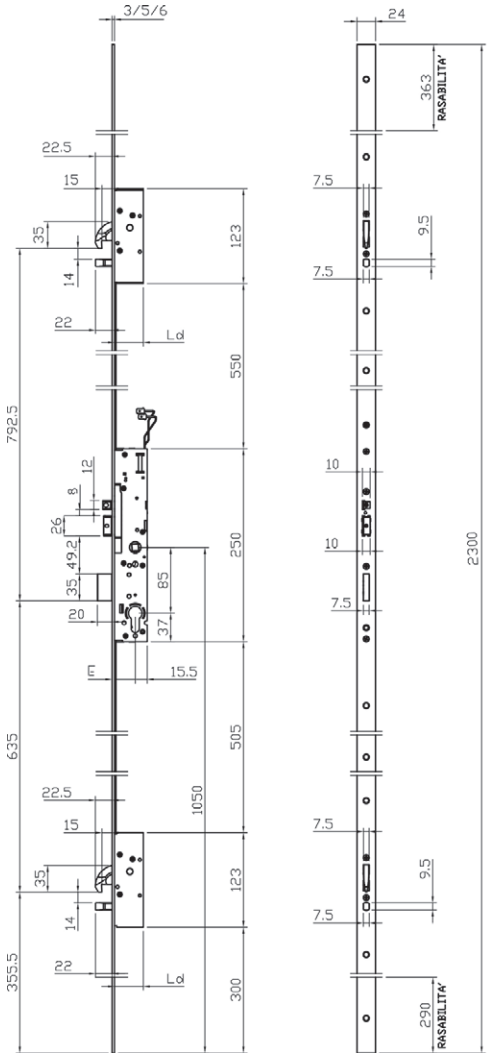




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	

Multipoint electric mortice lock for metal frames with 3 LATERAL LOCKINGS, **12Vac/dc**, 860mA, 10W.
ROTATING HOOK DEVIATORS AND SLIDING DEADBOLT LOCK.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT** 5mm, mm 8 handle follower.
Closed case for lock and deviators. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder
is not assembled into the housing of lock. **Black painted steel front plate**
HOLD-OPEN LEVER ON THE FRONT PLATE.


Accessories to be ordered separately:
Striking plates 038630/31/32/33/34

ISEO
ULTIMATE ACCESS TECHNOLOGIES


Performa Electric lock 85 mm **centre distance**



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 25	**72G5512508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 30	**72G5513008**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 35	**72G5513508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 40	**72G5514008**	1	-	1





U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 25	**72G5532508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 30	**72G5533008**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 35	**72G5533508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 40	**72G5534008**	1	-	1





Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 25	**72G5012508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 30	**72G5013008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 35	**72G5013508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 40	**72G5014008**	1	-	1

Performa Electric lock 85 mm **centre distance**

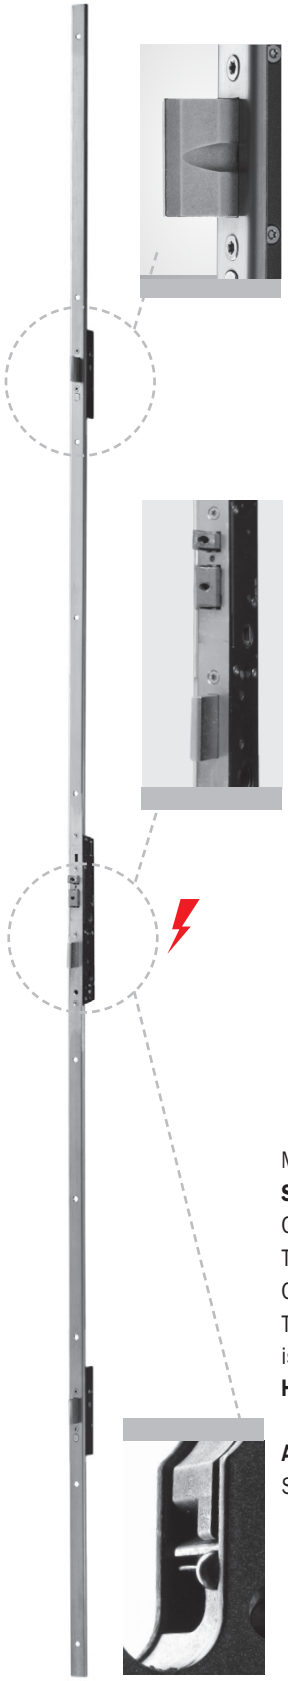


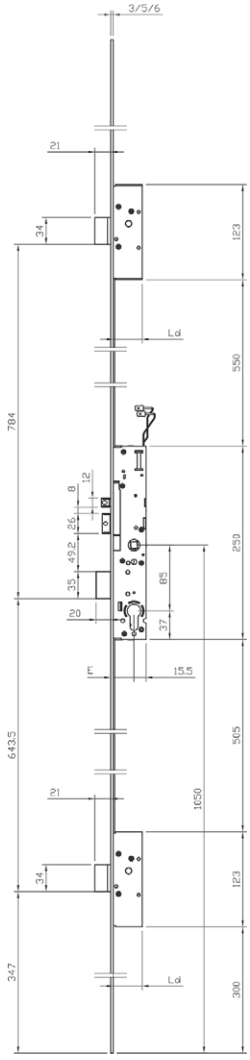

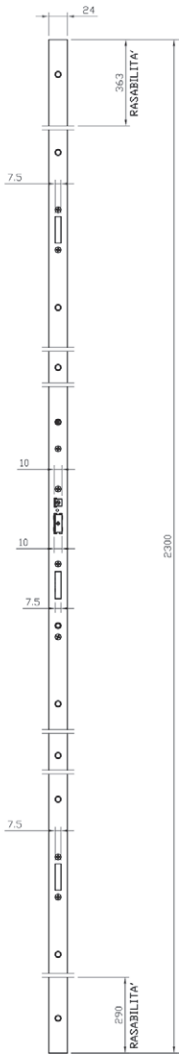




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	


Multipoint electric mortice lock for metal frames with 3 LATERAL LOCKINGS, **12Vac/dc**, 860mA, 10W.
SLIDING DEADBOLT LOCK AND DEVIATORS.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT** 5mm, mm 8 handle follower.
Closed case for lock and deviators. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder
is not assembled into the housing of lock. **STAINLESS STEEL front**
HOLD-OPEN LEVER ON THE FRONT PLATE.

Accessories to be ordered separately:
Striking plates 038630/31/32/33/34


Performa Electric lock 85 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 25	**72E5512528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 30	**72E5513028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 35	**72E5513528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 40	**72E5514028**	1	-	1




U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 25	**72E5532528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 30	**72E5533028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 35	**72E5533528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 40	**72E5534028**	1	-	1



Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 25	**72E5012528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 30	**72E5013028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 35	**72E5013528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 40	**72E5014028**	1	-	1


Performa Electric lock 85 mm **centre distance**

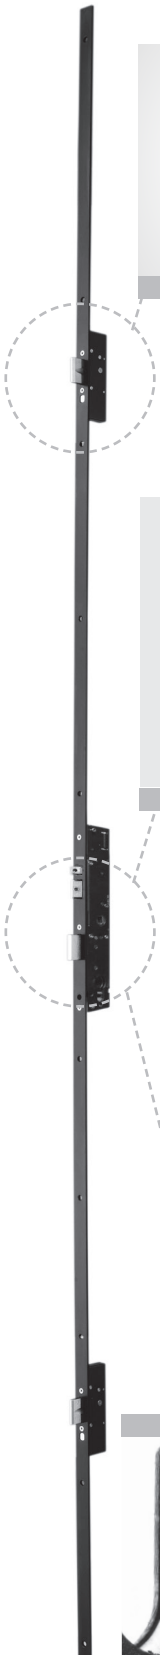









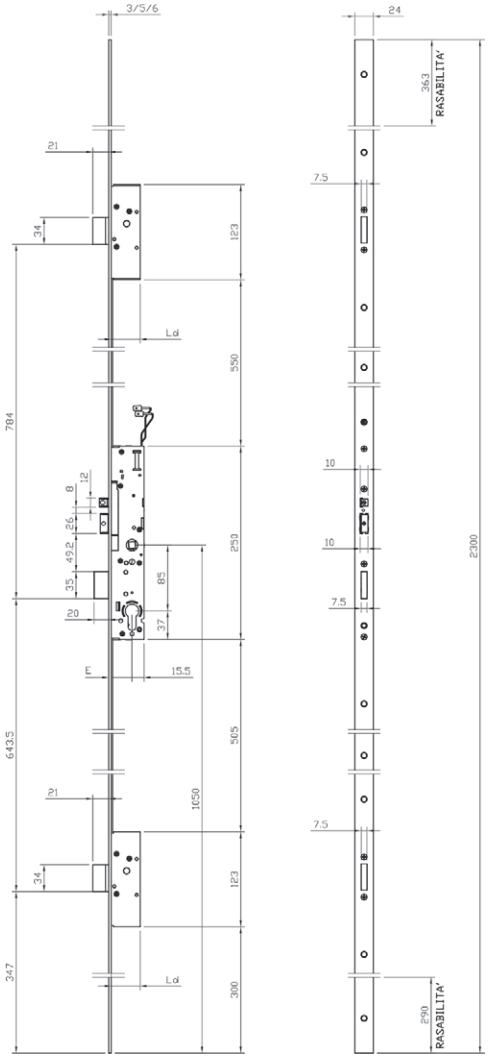




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	


Multipoint mortice lock for metal frames with 3 LATERAL LOCKINGS, **12Vac/dc**, 860mA, 10W.
SLIDING DEADBOLT LOCK AND DEVIATORS.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT** 5mm, mm 8 handle follower.
Closed case for lock and deviators. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder
is not assembled into the housing of lock. **Black painted steel front plate**
HOLD-OPEN LEVER ON THE FRONT PLATE.

Accessories to be ordered separately:
Striking plates 038630/31/32/33/34


Performa Electric lock 85 mm **centre distance**



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 25	**72E5512508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 30	**72E5513008**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 35	**72E5513508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 40	**72E5514008**	1	-	1




U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 25	**72E5532508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 30	**72E5533008**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 35	**72E5533508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 40	**72E5534008**	1	-	1





Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 25	**72E5012508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 30	**72E5013008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 35	**72E5013508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 40	**72E5014008**	1	-	1


Performa 85 mm centre distance








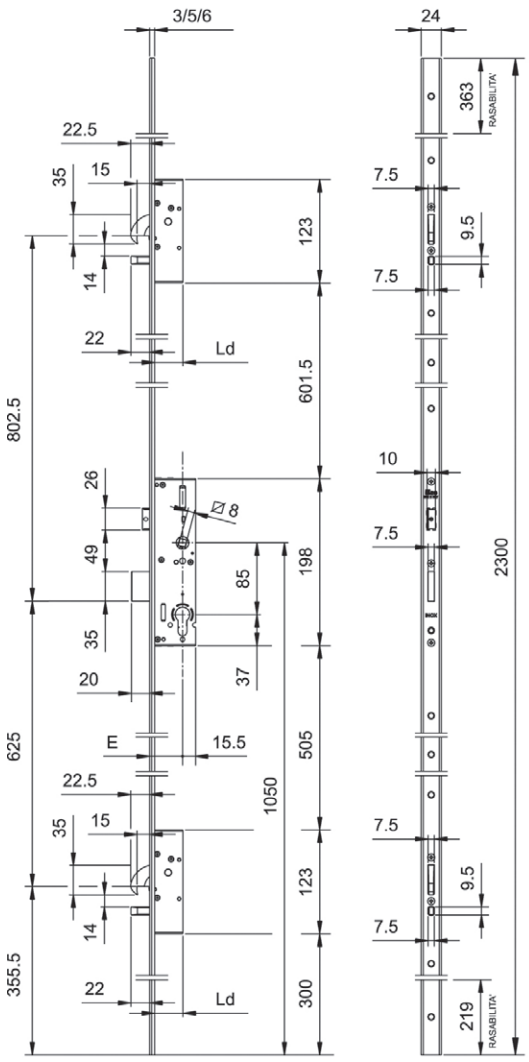




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	
45	38	53.5	
50	43	58.5	
55	48	63.5	
60	53	68.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	
45	39	54.5	
50	44	59.5	
55	49	64.5	
60	54	69.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	
45	42	57.5	
50	47	62.5	
55	52	67.5	
60	57	72.5	


MULTIPOINT mortice lock for metal frames, 3-point locking,
ROTATING HOOK DEVIATORS AND SLIDING DEADBOLT LOCK.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case for lock and deviators.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder is not assembled into the housing of lock.
STAINLESS STEEL front plate.

Accessories to be ordered separately:
Roller FOR CENTRAL LOCK 040940
Cap for DEADBOLT only versions 040950
Striking plates
Electric strikers


Performa 85 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 25	**7255512528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 30	**7255513028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 35	**7255513528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 40	**7255514028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 45	**7255514528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 50	**7255515028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 55	**7255515528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 60	**7255516028**	1	-	1




U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 25	**7255532528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 30	**7255533028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 35	**7255533528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 40	**7255534028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 45	**7255534528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 50	**7255535028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 55	**7255535528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 60	**7255536028**	1	-	1




Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 25	**7255012528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 30	**7255013028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 35	**7255013528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 40	**7255014028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 45	**7255014528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 50	**7255015028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 55	**7255015528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 60	**7255016028**	1	-	1


Performa 85 mm centre distance

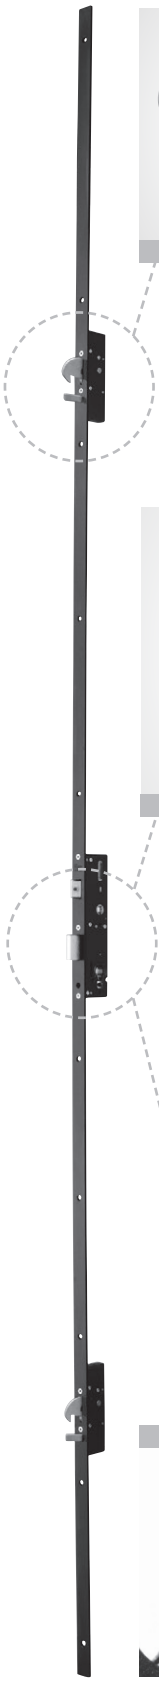









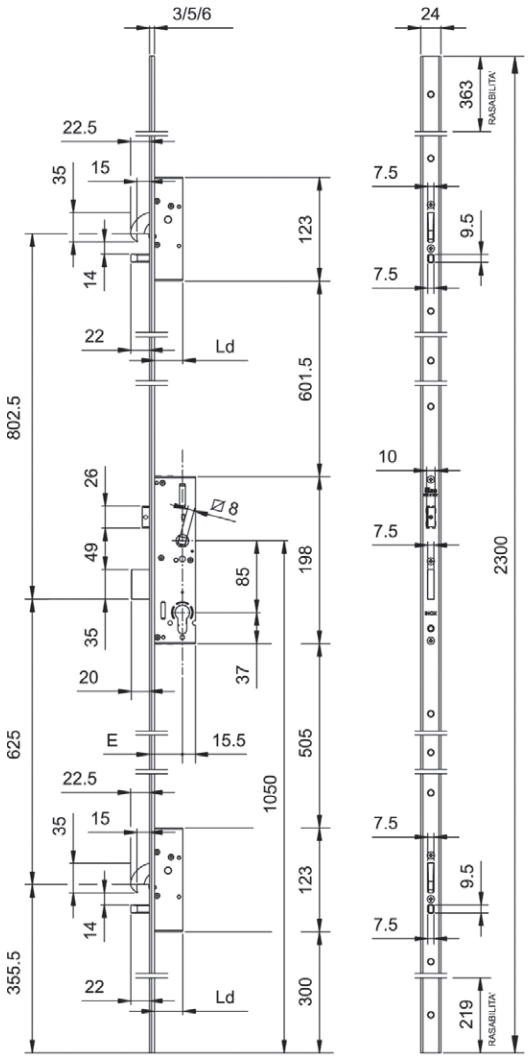




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	
45	38	53.5	
50	43	58.5	
55	48	63.5	
60	53	68.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	
45	39	54.5	
50	44	59.5	
55	49	64.5	
60	54	69.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	
45	42	57.5	
50	47	62.5	
55	52	67.5	
60	57	72.5	

MULTIPOINT mortice lock for metal frames, 3-point locking,
ROTATING HOOK DEVIATORS AND SLIDING DEADBOLT LOCK.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 HANDLE FOLLOWER.
Closed case for lock and deviators.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder is not assembled into the housing of lock.
Black painted steel front plate.


Accessories to be ordered separately:
Roller for CENTRAL LOCK 040940
Cap for DEADBOLT only versions 040950
Striking plates
Electric strikers

ISEO
ULTIMATE ACCESS TECHNOLOGIES


Performa 85 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 25	**7255512508**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 30	**7255513008**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 35	**7255513508**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 40	**7255514008**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 45	**7255514508**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 50	**7255515008**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 55	**7255515508**	1	-	1
U-front plate mm **2300x24x6** in black painted steel. 85 mm centre distance. Backset mm 60	**7255516008**	1	-	1





U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 25	**7255532508**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 30	**7255533008**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 35	**7255533508**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 40	**7255534008**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 45	**7255534508**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 50	**7255535008**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 55	**7255535508**	1	-	1
U-front plate mm **2300x24x5** in black painted steel. 85 mm centre distance. Backset mm 60	**7255536008**	1	-	1




Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 25	**7255012508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 30	**7255013008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 35	**7255013508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 40	**7255014008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 45	**7255014508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 50	**7255015008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 55	**7255015508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steel. 85 mm centre distance. Backset mm 60	**7255016008**	1	-	1


Performa 85 mm centre distance

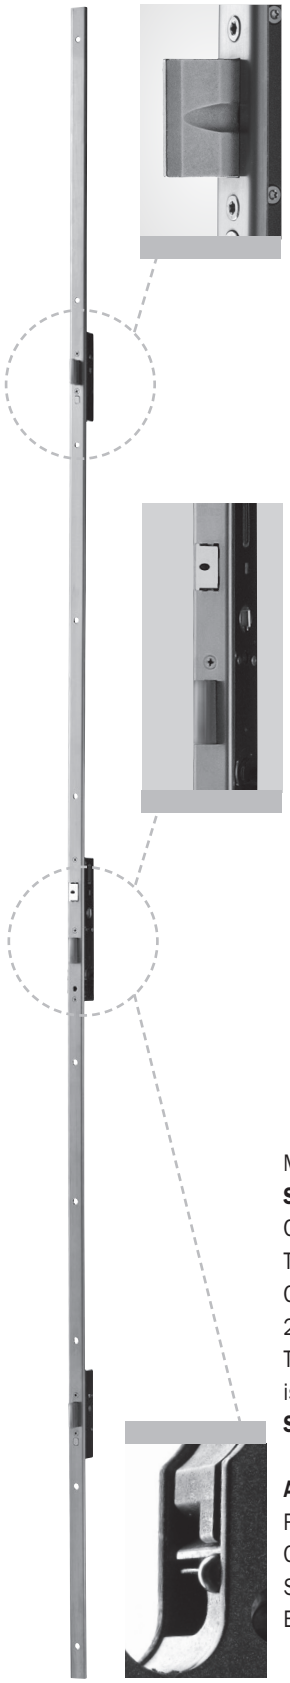

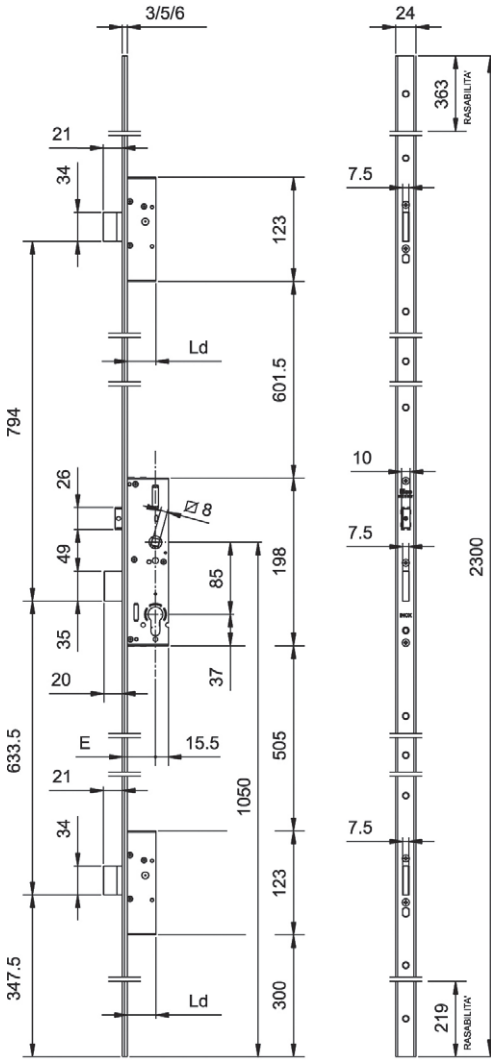




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	
45	38	53.5	
50	43	58.5	
55	48	63.5	
60	53	68.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	
45	39	54.5	
50	44	59.5	
55	49	64.5	
60	54	69.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	
45	42	57.5	
50	47	62.5	
55	52	67.5	
60	57	72.5	


MULTIPOINT mortice lock for metal frames, 3-point locking,
SLIDING DEADBOLT LOCK AND DEVIATORS.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case for lock and deviators.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder is not assembled into the housing of lock.
STAINLESS STEEL front plate.

Accessories to be ordered separately:
Roller FOR CENTRAL LOCK 040940
Cap for DEADBOLT only versions 040950
Striking plates
Electric strikers


Performa 85 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 25	**7235512528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 30	**7235513028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 35	**7235513528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 40	**7235514028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 45	**7235514528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 50	**7235515028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 55	**7235515528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm 60	**7235516028**	1	-	1




U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 25	**7235532528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 30	**7235533028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 35	**7235533528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 40	**7235534028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 45	**7235534528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 50	**7235535028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 55	**7235535528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm 60	**7235536028**	1	-	1



Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 25	**7235012528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 30	**7235013028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 35	**7235013528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 40	**7235014028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 45	**7235014528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 50	**7235015028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 55	**7235015528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm 60	**7235016028**	1	-	1


Performa 85 mm centre distance

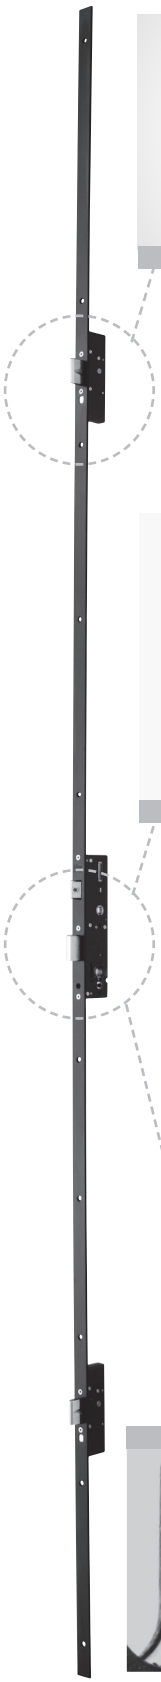









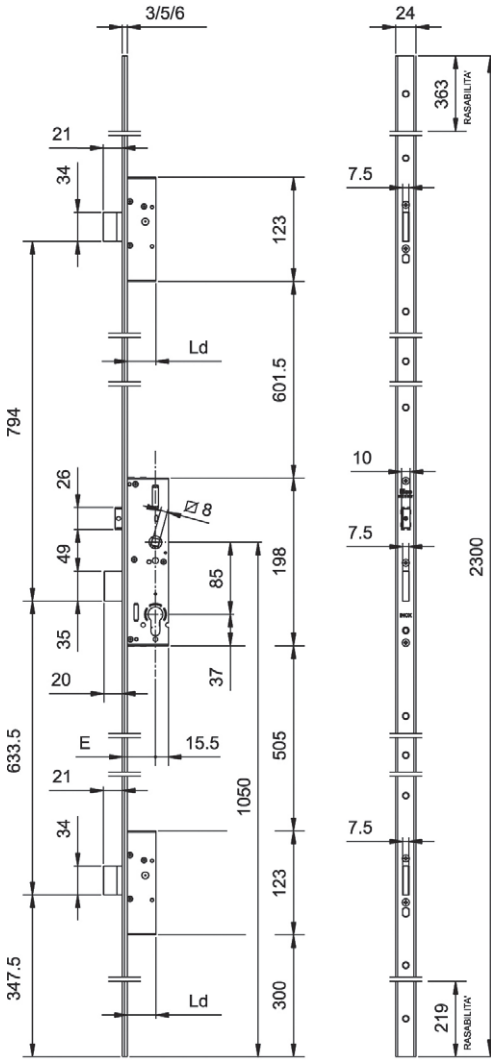




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	
45	38	53.5	
50	43	58.5	
55	48	63.5	
60	53	68.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	
45	39	54.5	
50	44	59.5	
55	49	64.5	
60	54	69.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	
45	42	57.5	
50	47	62.5	
55	52	67.5	
60	57	72.5	


MULTIPOINT mortice lock for metal frames, 3-point locking,
SLIDING DEADBOLT LOCK AND DEVIATORS.
Central lock, centre distance mm **85**, European profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case for lock and deviators.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder is not present into the housing of lock.
Black painted steel front plate.

Accessories to be ordered separately:
Roller FOR CENTRAL LOCK 040940
Cap for DEADBOLT only versions 040950
Striking plates
Electric strikers


Performa 85 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 25	**7235512508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 30	**7235513008**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 35	**7235513508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 40	**7235514008**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 45	**7235514508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 50	**7235515008**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 55	**7235515508**	1	-	1
U-front plate mm **2300x24x6** in black painted steed. 85 mm centre distance. Backset mm 60	**7235516008**	1	-	1





U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 25	**7235532508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 30	**7235533008**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 35	**7235533508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 40	**7235534008**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 45	**7235534508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 50	**7235535008**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 55	**7235535508**	1	-	1
U-front plate mm **2300x24x5** in black painted steed. 85 mm centre distance. Backset mm 60	**7235536008**	1	-	1




Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 25	**7235012508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 30	**7235013008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 35	**7235013508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 40	**7235014008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 45	**7235014508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 50	**7235015008**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 55	**7235015508**	1	-	1
Flat front plate mm **2300x24x3** in black painted steed. 85 mm centre distance. Backset mm 60	**7235016008**	1	-	1


Performa 92 mm centre distance

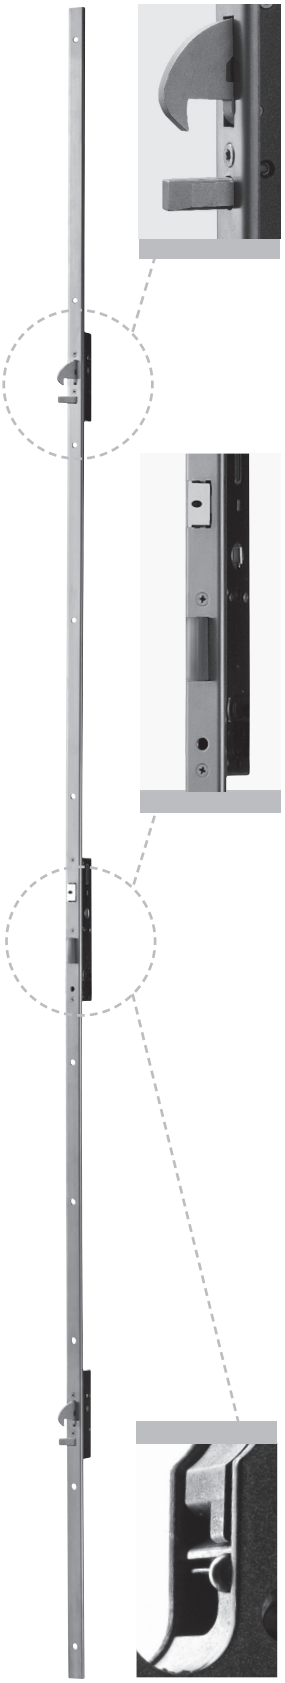

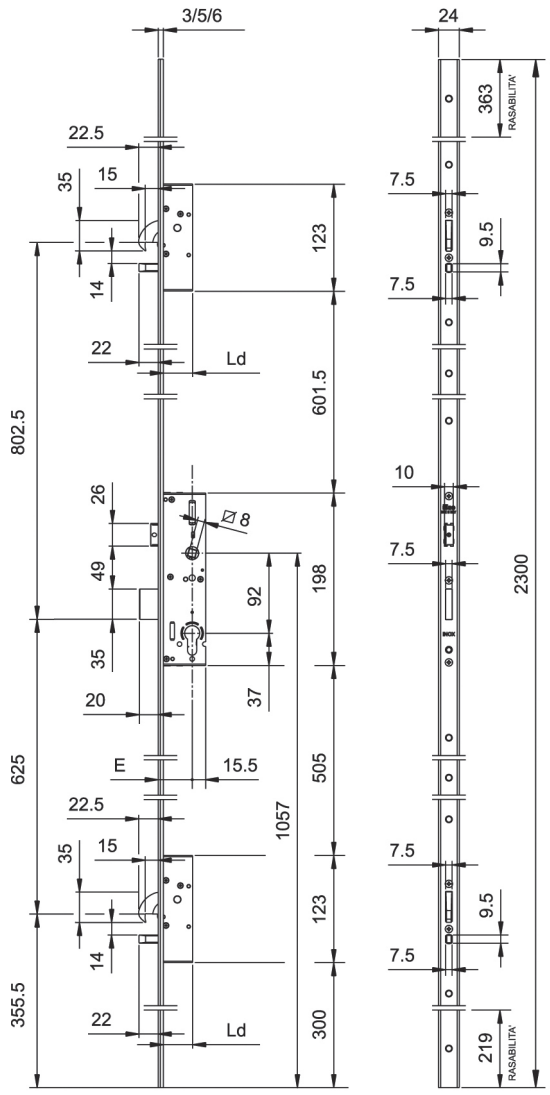




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	
45	38	53.5	
50	43	58.5	
55	48	63.5	
60	53	68.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	
45	39	54.5	
50	44	59.5	
55	49	64.5	
60	54	69.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	
45	42	57.5	
50	47	62.5	
55	52	67.5	
60	57	72.5	


MULTIPOINT mortice lock for metal frames, 3-point locking,
ROTATING HOOK DEVIATORS AND SLIDING DEADBOLT LOCK.
Central lock, centre distance mm **92**, European profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case lock and deviators.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder is not present into the housing of lock.
Stainless steel front plate.

Accessories to be ordered separately:
Roller for CENTRAL LOCK 040940
Cap for deadbolt only versions 040950
Striking plates
Electric strikers


Performa 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 25	**7252512528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 30	**7252513028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 35	**7252513528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 40	**7252514028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 45	**7252514528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 50	**7252515028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 55	**7252515528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 60	**7252516028**	1	-	1



U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 25	**7252532528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 30	**7252533028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 35	**7252533528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 40	**7252534028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 45	**7252534528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 50	**7252535028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 55	**7252535528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 60	**7252536028**	1	-	1




Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 25	**7252012528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 30	**7252013028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 35	**7252013528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 40	**7252014028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 45	**7252014528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 50	**7252015028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 55	**7252015528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 60	**7252016028**	1	-	1


Performa 92 mm centre distance











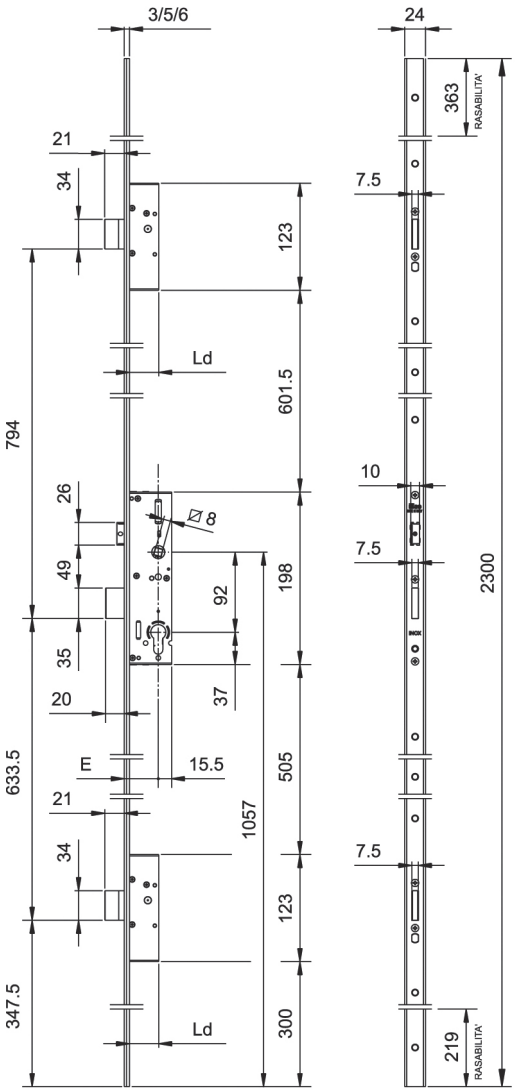




BACKSET	A	L	Ld
25	18	33.5	33.5
30	23	38.5	
35	28	43.5	
40	33	48.5	
45	38	53.5	
50	43	58.5	
55	48	63.5	
60	53	68.5	



BACKSET	A	L	Ld
25	19	34.5	34.5
30	24	39.5	
35	29	44.5	
40	34	49.5	
45	39	54.5	
50	44	59.5	
55	49	64.5	
60	54	69.5	




BACKSET	A	L	Ld
25	22	37.5	37.5
30	27	42.5	
35	32	47.5	
40	37	52.5	
45	42	57.5	
50	47	62.5	
55	52	67.5	
60	57	72.5	

MULTIPOINT mortice lock for metal frames, 3-point locking,
SLIDING DEADBOLT LOCK AND DEVIATORS.
Central lock, centre distance mm **92**, profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case for lock and deviators.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder is not present into the housing of lock.
Stainless steel front plate.


Accessories to be ordered separately:
Roller FOR CENTRAL LOCK 040940
Cap for DEADBOLT only versions 040950
Striking plates
Electric strikers

ISEO
ULTIMATE ACCESS TECHNOLOGIES


Performa 92 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 25	**7232512528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 30	**7232513028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 35	**7232513528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 40	**7232514028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 45	**7232514528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 50	**7232515028**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 55	**7232515528**	1	-	1
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm 60	**7232516028**	1	-	1




U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 25	**7232532528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 30	**7232533028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 35	**7232533528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 40	**7232534028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 45	**7232534528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 50	**7232535028**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 55	**7232535528**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm 60	**7232536028**	1	-	1





Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 25	**7232012528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 30	**7232013028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 35	**7232013528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 40	**7232014028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 45	**7232014528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 50	**7232015028**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 55	**7232015528**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm 60	**7232016028**	1	-	1

Performa Options



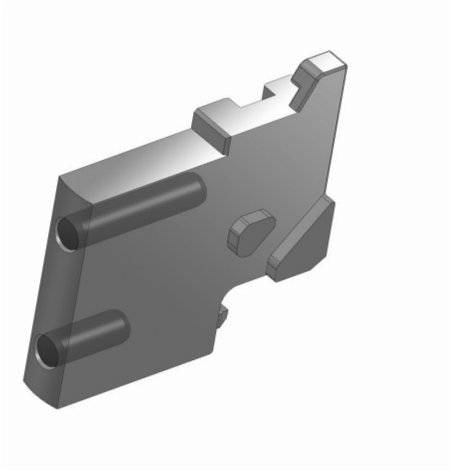

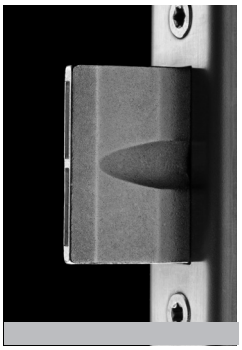

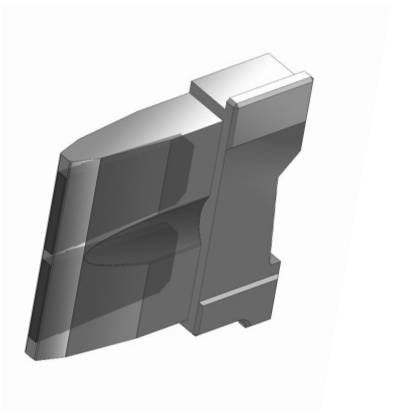


DEVIATORS AND LOCK WITH SLIDING DEADBOLTS, STAINLESS STEEL FRONT PLATE.


	Code	Single package	Multiple package	Min. ord.
REINFORCED ANTI-SAW DEADBOLTS. 85 mm CENTRE DISTANCE LOCK				
U-front plate mm **2300x24x6** in stainless steel. 85 mm centre distance. Backset mm **	**723651******28**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 85 mm centre distance. Backset mm **	**723653******28**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 85 mm centre distance. Backset mm **	**723601******28**	1	-	1
REINFORCED ANTI-SAW DEADBOLTS. 92 mm CENTRE DISTANCE LOCK				
U-front plate mm **2300x24x6** in stainless steel. 92 mm centre distance. Backset mm **	**723351******28**	1	-	1
U-front plate mm **2300x24x5** in stainless steel. 92 mm centre distance. Backset mm **	**723353******28**	1	-	1
Flat front plate mm **2300x24x3** in stainless steel. 92 mm centre distance. Backset mm **	**723301******28**	1	-	1


** = **Backset** mm 25/30/35/40/45/50/55/60

Performa Electric lock 85 mm **centre distance**



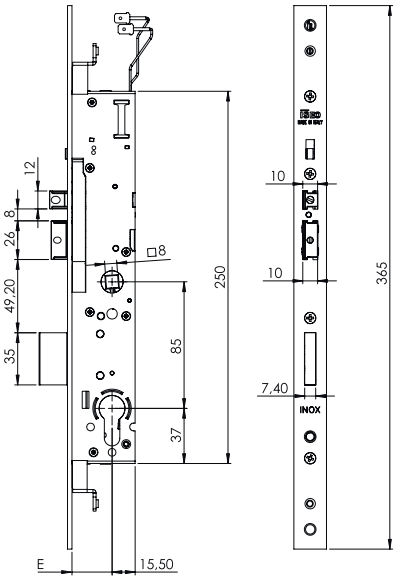

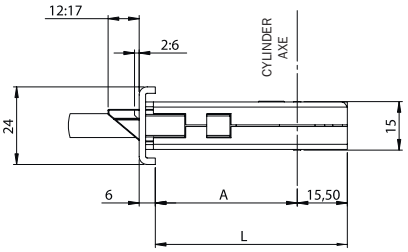

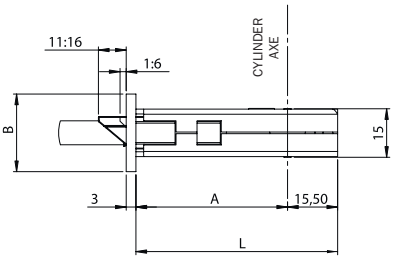


BACKSET	A	L
25	18	33,5
30	23	38,5
35	28	43,5
40	33	48,5

BACKSET	A	L	B
25	22	37,5	
30	27	42,5	22
35	32	47,5	
40	37	52,5	
25	22	37,5	
30	27	42,5	24
35	32	47,5	
40	37	52,5	


ELECTRIC LATERAL, mortice lock for metal frames, 3-POINT LOCKING WITH **SLIDING DEADBOLT**, **12Vac/dc**, 860mA, 10W. Centre distance mm **85**, European profile cylinder. Rods screwed connection. Throw mm 20, **SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT** 5mm, mm 8 handle follower. Closed case for lock. 2 nylon end blocks for U-version. Fixing screws. Instruction sheet. The lock is equipped with a wheel-cam stopping device in case the cylinder is not present into the housing of lock.
Stainless steel front plate.
HOLD-OPEN LEVER ON THE FRONT PLATE.

Accessories to be ordered separately:
Top/bottom sliding deviators with rods, front plate mm 24x3 720400322
Top/bottom hook deviators with rods, front plate mm 24x3 720440322
Striking plates 038630/31/32/33/34


Performa Electric lock 85 mm **centre distance**



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **365x24x6** in stainless steel. Backset mm 25	**7295212528**	1	10	10
U-front plate mm **365x24x6** in stainless steel. Backset mm 30	**7295213028**	1	10	10
U-front plate mm **365x24x6** in stainless steel. Backset mm 35	**7295213528**	1	10	10
U-front plate mm **365x24x6** in stainless steel. Backset mm 40	**7295214028**	1	10	10




	Code	Single package	Multiple package	Min. ord.
Flat front plate mm **365x24x3** in stainless steel. Backset mm 25	**7295112528**	1	10	10
Flat front plate mm **365x24x3** in stainless steel. Backset mm 30	**7295113028**	1	10	10
Flat front plate mm **365x24x3** in stainless steel. Backset mm 35	**7295113528**	1	10	10
Flat front plate mm **365x24x3** in stainless steel. Backset mm 40	**7295114028**	1	10	10




	Code	Single package	Multiple package	Min. ord.
front plate mm **365x22x3** in stainless steel. Backset mm 25	**7295142528**	1	10	10
front plate mm **365x22x3** in stainless steel. Backset mm 30	**7295143028**	1	10	10
front plate mm **365x22x3** in stainless steel. Backset mm 35	**7295143528**	1	10	10
front plate mm **365x22x3** in stainless steel. Backset mm 40	**7295144028**	1	10	10


Performa 85 mm centre distance



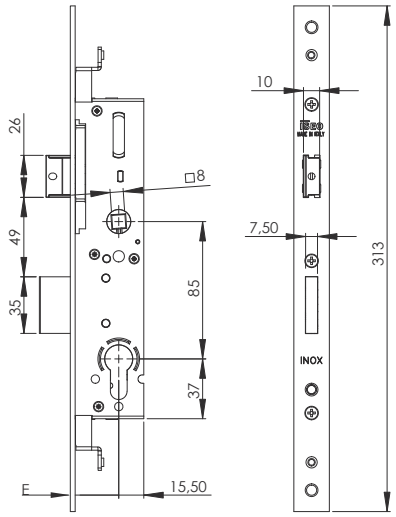

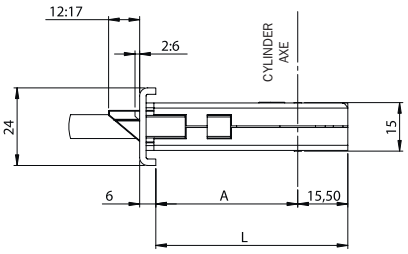

BACKSET	A	L
25	18	33,5
30	23	38,5
35	28	43,5
40	33	48,5

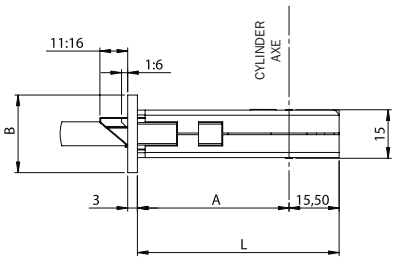


BACKSET	A	L	B
25	22	37,5	
30	27	42,5	22
35	32	47,5	
40	37	52,5	
25	22	37,5	
30	27	42,5	24
35	32	47,5	
40	37	52,5	


LATERAL mortice lock for metal frames, 3-POINT LOCKING WITH **SLIDING DEADBOLT**,
centre distance mm **85**, European profile cylinder.
Rods screwed connection.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case for lock.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder
is not present into the housing of lock.
Stainless steel front plate.

Accessories to be ordered separately:
Top/bottom sliding deviators with rods, front plate mm 24x3 720400322
Top/bottom hook deviators with rods, front plate mm 24x3 720440322
Roller FOR CENTRAL LOCK 040940
Cap for central lock, deadbolt only versions 040950
Latchbolt FOR CENTRAL LOCK 040990
Striking plates
Electric strikers


Performa 85 mm centre distance



	Code	Single package	Multiple package	Min. ord.
U-front plate mm **313x24x6** in stainless steel. Backset mm 25	**7295212528**	1	10	10
U-front plate mm **313x24x6** in stainless steel. Backset mm 30	**7295213028**	1	10	10
U-front plate mm **313x24x6** in stainless steel. Backset mm 35	**7295213528**	1	10	10
U-front plate mm **313x24x6** in stainless steel. Backset mm 40	**7295214028**	1	10	10



	Code	Single package	Multiple package	Min. ord.
Flat front plate mm **313x24x3** in stainless steel. Backset mm 25	**7295112528**	1	10	10
Flat front plate mm **313x24x3** in stainless steel. Backset mm 30	**7295113028**	1	10	10
Flat front plate mm **313x24x3** in stainless steel. Backset mm 35	**7295113528**	1	10	10
Flat front plate mm **313x24x3** in stainless steel. Backset mm 40	**7295114028**	1	10	10




	Code	Single package	Multiple package	Min. ord.
front plate mm **313x22x3** in stainless steel. Backset mm 25	**7295142528**	1	10	10
front plate mm **313x22x3** in stainless steel. Backset mm 30	**7295143028**	1	10	10
front plate mm **313x22x3** in stainless steel. Backset mm 35	**7295143528**	1	10	10
front plate mm **313x22x3** in stainless steel. Backset mm 40	**7295144028**	1	10	10

Performa


Accessories suitable for central lock





LATERAL DEVIATORS FOR 3-POINT LOCKING WITH INTERNAL RODS.
Front plate mm 24x3 in stainless steel.
To be used with locks PERFORMA, series 7275* - 7295*.


	Code	Single package	Multiple package	Min. ord.
For locks with backset mm 25, 30, 35, 40	**720400342**	1	-	1



LATERAL DEVIATORS FOR 3-POINT LOCKING WITH INTERNAL RODS.
Front plate mm 22x3 in stainless steel.
To be used with locks PERFORMA, series 7275* - 7295*.


	Code	Single package	Multiple package	Min. ord.
Per serratura entrata mm 25, 30, 35, 40	**720400322**	1	-	1





HOOK DEVIATORS FOR 3-POINT LOCKING WITH INTERNAL RODS.
Front plate mm 24x3 in stainless steel.
To be used with locks PERFORMA, series 7275* - 7295*.

	Code	Single package	Multiple package	Min. ord.
For locks with backset mm 25, 30, 35, 40	**720440342**	1	-	1




HOOK DEVIATORS FOR 3-POINT LOCKING WITH INTERNAL RODS.
Front plate mm 22x3 in stainless steel.
To be used with locks PERFORMA, series 7275* - 7295*.


	Code	Single package	Multiple package	Min. ord.
For locks with backset mm 25, 30, 35, 40	**720440322**	1	-	1

Performa


Accessories to be ordered separately








	Code	Single package	Multiple package	Min. ord.
Pair of plates with pin to connect the lock or the deviators with screwd connections M4 and external rods. In zinc-plated steel.	**990853**	10	-	10

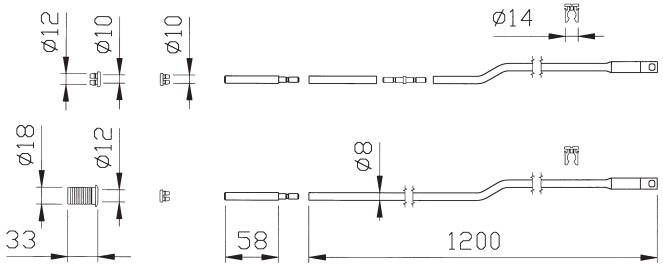

Pair of internal deviated rods. Zinc-plate tube Ø mm 8 with slotted hole for screwed connection M4.
Two tips Ø mm 8. Striker for nylon tip Ø mm 8. Two noiseproof nylon bushes. One rod connection.
Two nylon rod guides. Two lock-fixing plates. One antidust floor socket hole Ø mm 12.

	Code	Single package	Multiple package	Min. ord.
For locks with rods screwed connection series 7275* - 7295* - 782* - 783* - 963*	**990850**	1	5	5

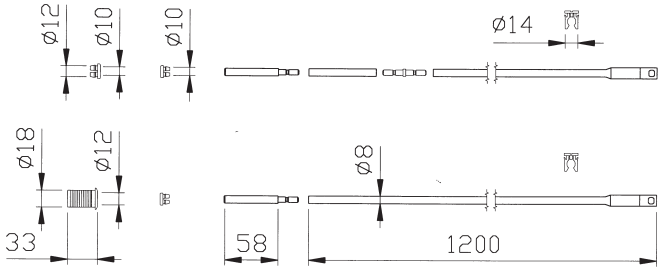

Pair of internal straight rods. Zinc-plate tube Ø mm 8 with slotted hole for screwed connection M4.
Two tips Ø mm 8. Striker for nylon tip Ø mm 8. Two noiseproof nylon bushes. One rod connection.
Two nylon rod guides. One antidust floor socket hole Ø mm 12.


	Code	Single package	Multiple package	Min. ord.
For locks with rods screwed connection series 7275* - 7295* - 782* - 783* - 963*	**990851**	1	5	5





Threaded connection M8 for threaded rod. For use with 3-point locks for metal frames series 7275* - 7295* - 782* - 783* - 963* - 983* - 663*.

	Code	Single package	Multiple package	Min. ord.
To be used with clutch or screwed connection.	**990823**	20	-	20


Performa 92 mm centre distance

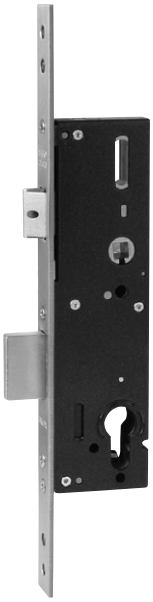

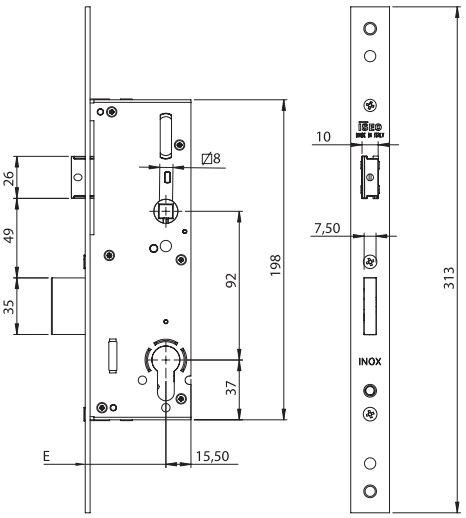

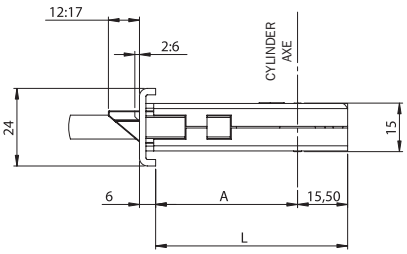

BACKSET	A	L
30	23	38.5
35	28	43.5
40	33	48.5

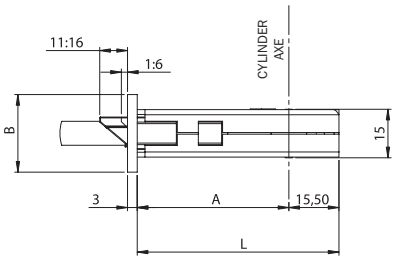


BACKSET	A	L	B
30	27	42.5	16
35	32	47.5	
40	37	52.5	
30	27	42.5	20
35	32	47.5	
40	37	52.5	
30	27	42.5	24
35	32	47.5	
40	37	52.5	

LATERAL mortice lock for metal frames, LATERAL LOCKING WITH **SLIDING DEADBOLT**,
centre distance mm **92**, European profile cylinder.
Throw mm 20, **reversible latchbolt.** The latchbolt can be replaced with roller or cap, mm 8 handle follower.
Closed case for lock.
2 nylon end blocks for U-version. Fixing screws. Instruction sheet.
The lock is equipped with a wheel-cam stopping device in case the cylinder
is not present into the housing of lock.
Stainless steel front plate.


Accessories to be ordered separately:
Roller FOR CENTRAL LOCK 040940
Cap for DEADBOLT only versions 040950
Striking plates
Electric strikers

ISEO
ULTIMATE ACCESS TECHNOLOGIES


Performa 92 mm centre distance




	Code	Single package	Multiple package	Min. ord.
U-front plate mm **313x24x6** in stainless steel. Backset mm 30	**7212213028**	1	10	10
U-front plate mm **313x24x6** in stainless steel. Backset mm 35	**7212213528**	1	10	10
U-front plate mm **313x24x6** in stainless steel. Backset mm 40	**7212214028**	1	10	10



Flat front plate mm **313x24x3** in stainless steel. Backset mm 30	**7212113028**	1	10	10
Flat front plate mm **313x24x3** in stainless steel. Backset mm 35	**7212113528**	1	10	10
Flat front plate mm **313x24x3** in stainless steel. Backset mm 30	**7212114028**	1	10	10



Flat front plate mm **313x20x3** in stainless steel. Backset mm 30	**7212123028**	1	10	10
Flat front plate mm **313x20x3** in stainless steel. Backset mm 35	**7212123528**	1	10	10
Flat front plate mm **313x20x3** in stainless steel. Backset mm 40	**7212124028**	1	10	10



Flat front plate mm **313x16x3** in stainless steel. Backset mm 30	**7212133028**	1	10	10
Flat front plate mm **313x16x3** in stainless steel. Backset mm 35	**7212133528**	1	10	10
Flat front plate mm **313x16x3** in stainless steel. Backset mm 40	**7212134028**	1	10	10

Performa

Accessories suitable for central lock



	Code	Single package	Multiple package	Min. ord.
ROLLER KIT FOR PERFORMA, WITH NYLON INSERTS It can replace the latchbolt. For locks with backset mm 25, 30, 35, 40, 45, 50, 55, 60	**040940**	10	-	10



CAP KIT FOR PERFORMA It can replace the latchbolt for DEADBOLTS only version. For locks with backset mm 25, 30, 35, 40, 45, 50, 55, 60	**040950**	10	-	10




LATCHBOLT KIT FOR PERFORMA				
For locks 85/92 mm centre distance. With backset mm 30, 35, 40, 45, 50, 55, 60	**040990**	10	-	10
For locks 85 mm centre distance. With backset mm 25 centre distance 85	**040995**	10	-	10
For locks 92 mm centre distance. With backset mm 25 centre distance 92	**040992**	10	-	10


ISEO ULTIMATE ACCESS TECHNOLOGIES

Code | Single package | Multiple package | Min. ord.

Performa Electric and mechanical version



Full-size scale

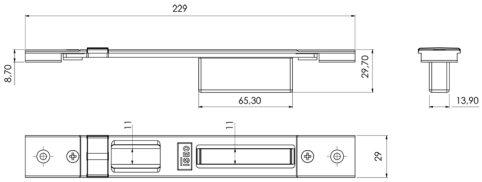


Door profile


ALCAN abithal Keeper Porta 53-60 / Abithal Keeper Porta 61-68 Abithal Porta / Winner Porta
ALCOA fb 12 Blindato / Formula F40 Porta / Formula F40 Tt Porta Formula F50 Porta / Formula F50 Tt Porta / Formula F60 Tt Porta Plana 1 Anta / Plana 2 Ante
ALL.CO all.Co 5 Porta / All.Co 5 Tt Porta / Export 50 Porta Export 50 Tt Porta / Sicurblin 65
ALNOR montreal Porta
ALU-K alublindo / N 45 Porta / N 53 Porta / N 55 Tt Porta N 62 Tt Porta
ALU-MEC synthesis 57 Porta / Synthesis 60Tt Porta
ALUSUISSE alsec 2000 Porta 59 / Alsec 2000 Porta 69
BODEGA extrablind 70
DOMAL domal Break 52 Porta / Domal Break 70 Porta Domal Security Porta / Domal Shops Porta / Domal Stopper Pg Porta
ESA blindal 60 Porta 1 Anta / Blindal 60 Porta 2 Ante Blindal 70 Porta 1 Anta / Blindal 70 Porta 2 Ante
FRESIA global 48 Porta
INDINVEST alpha 445 Porta 2 Ante
METRA nc 45 International Porta / Nc 45 Superthermic Porta Nc 55 International Porta / Nc 68 Superthermic Porta Nuovo Nc 50 Porta / Superblindo
NEW TEC new Tec 50 Porta Complanare New Tec 52 Tt Porta Complanare / New Tec 68 Tt Porta Complanare
OCMAfc 60 Tt Porta / Sv 47 Porta 1 Anta / Sv 47 Porta 2 Ante Sv 62 Porta 1 Anta / Sv 62 Porta 2 Ante / Sv 62 Tt Porta 1 Anta Sv 62 Tt Porta 2 Ante
PASSERINI ekip Blindo / Ekip Maastricht 53 Porta 1 Anta Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante
Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante / Ekip Thermo 53 Porta
PROFILATI"Pe ""Eku 53"" Porta"
"Pe ""Eku 64 Tt"" Porta"
"Pe ""Eku 72 Tt"" Porta"
SCHÜCO royal 78 St Blindato / Royal S 50 N / Royal S 55 Tt Royal S 65 Tt
WICONA I60-A / L70-A

ADJUSTABLE closed striking plate for **CENTRAL LOCK** PERFORMA ELECTRIC AND MECHANICAL, all versions.
Flat front plate **29x229**
with vertical adjustment from 7 to 12 mm
and horizontal adjustment ± mm 2.

Black-painted steel	**038630**	10	-	10
Stainless steel	**038640**	10	-	10



Full-size scale

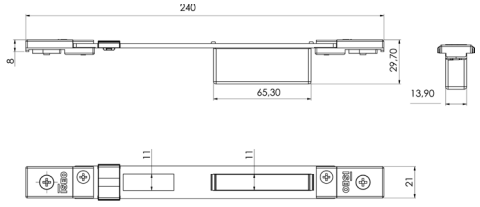

Euro groove


ALCAN abithal Cristal / Abithal Keeper Porta C.E. / Winner Finestra
ALCOA fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 REVERSIBLE R 35 Sormonto
ALL.CO export 40 Finestra / Export 45 Tt Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
ALU-MEC synthesis 45 Finestra / Synthesis 57 Finestra Synthesis 60 Tt Finestra
ALUSUISSE alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
BODEGA bga 50 / New Bt 60
DOMAL domal Break 52 Finestra / Domal Break 70 Finestra Domal Stopper Pg Finestra
EQUIPE sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante / Sistema 8000 Tt Finestra 1 Anta
Sistema 8000 Tt Finestra 2 Ante
ESA isola Porta
ESEDRA ga 53 Porta / Tt 63 Porta / Tt 75 Porta
INDINVEST gold 400 Complanare / Gold 400 Sormonto Gold 500 Complanare / Gold 500 Sormonto / Gold 600 Complanare Gold 600 Sormonto
METRA nc 45 International Finestra / Nc 45 Superthermic Finestra Nc 55 International Finestra / Nc 68 Superthermic Finestra Nuovo Nc 40 Sorm. 2 Ante Con Riporto / Nuovo Nc 40 Sormonto 1 Anta
MORELLI ma 8300
OCMA fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
PASSERINI ekip 40 Evoluzione 1 Anta / Ekip 40 Evoluzione 2 Ante Ekip 40 Sormonto 1 Anta / Ekip 40 Sormonto 2 Ante
Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra Ekip Maastricht Th 68 Finestra
PROFILATI "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra" "Pe ""Eku 72 Tt"" Finestra" /Sistema 1 Pe 40 Comp./Est. 1 Anta Sistema 1 Pe 40 Sormonto 1 Anta / Sistema 1 Pe 50 Comp./Est. 1 Anta Sistema 1 Pe 50 Sormonto 1 Anta

ADJUSTABLE closed striking plate for **CENTRAL LOCK** PERFORMA ELECTRIC AND MECHANICAL, all versions.
Flat front plate **21x240**
with vertical adjustment through threaded plates
and horizontal adjustment ± mm 9.


Black-painted steel	**038631**	10	-	10
Stainless steel	**038641**	10	-	10

Performa Electric and mechanical version

Code	Single package	Multiple package	Min. ord.




Full-size scale

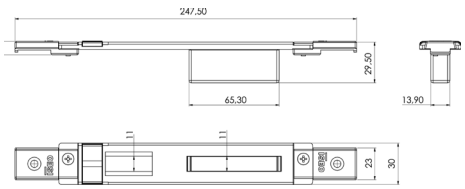


ALCOA alublind / R 40 RÉVERSIBLE 1 Anta / R 40 RÉVERSIBLE 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare
ALL.CO all.Co 5 RÉVERSIBLE / All.Co 5 Sormonto / Ites P4 Sormonto
ALU-K n 45 RÉVERSIBLE
ESA giuntall Porta
FRESIA global 41 Complanare / Global 41 Sormonto
Global 48 Complanare / Global 48 Sormonto / Global 70 Taglio Termico
METRA nuovo Nc 50 Sormonto 1 Anta / Nuovo Nc 50 Sormonto 2 Ante
New Tecnew Tec 50 Porta Sormonto / New Tec 52 Tt Porta Sormonto
New Tec 60 Tt Porta Sormonto / New Tec 68 Tt Porta Sormonto
PASSERINI ekip 50 Sormonto 1 Anta / Ekip 50 Sormonto 2 Ante

ADJUSTABLE closed striking plate for **CENTRAL LOCK**
PERFORMA ELECTRIC AND MECHANICAL, all versions.
Black-painted zamak. Flat front plate **30x247,5**
horizontal adjustment ± 9 mm — **038632** | 10 | - | 10




Full-size scale

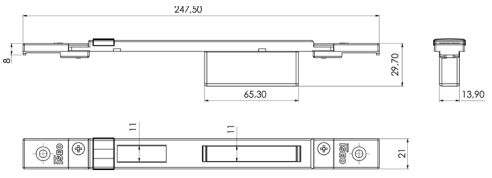


ALL.CO all.Co 5 Complanare / Ites P4 Complanare
ALNOR blindo Block / Montreal G.A.
ALU-K n 53 Complanare / N 55 Tt Complanare
ESA giuntall Complanare
INDINVEST alpha 255 Complanare / Alpha 370 Tt Complanare
Alpha 445 Finestra / Alpha 445 Porta 1 Anta
Alpha 658 Tt Complanare / Alpha Blitz 2000
Alpha Globo 45 / Alpha Globo 55
METRA nuovo Nc 40 Complanare / Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 50 Complanare
PASSERINI ekip 40 Complanare 1 Anta
Ekip 40 Complanare 2 Ante
Ekip 50 Complanare 1 Anta / Ekip 50 Complanare 2 Ante
Ekip Thermo 53 Finestra 1 Anta / Ekip Thermo 53 Finestra 2 Ante
Ekip Thermo 58 Finestra 1 Anta / Ekip Thermo 58 Finestra 2 Ante
PROFILATI sistema 1 Pe 40 Comp./Est. 2 Ante
Sistema 1 Pe 40 Sormonto 2 Ante / Sistema 1 Pe 50 Comp. Est. 2 Ante
Sistema 1 Pe 50 Sormonto 2 Ante

ADJUSTABLE closed striking plate for **CENTRAL LOCK**
PERFORMA ELECTRIC AND MECHANICAL, all versions.
Black-painted zamak. Flat front plate **21x247,5**
horizontal adjustment ± 9 mm — **038633** | 10 | - | 10




Full-size scale

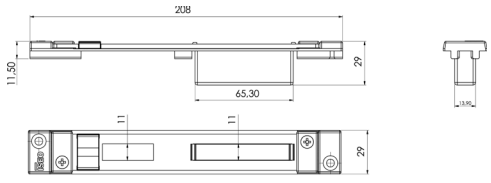


"Erre" profile
ALCOA alublind / R 40 RÉVERSIBLE 1 Anta
R 40 RÉVERSIBLE 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare

ADJUSTABLE closed striking plate for **CENTRAL LOCK**
PERFORMA ELECTRIC AND MECHANICAL, all versions.
Flat front plate **29x208** horizontal adjustment ± 13 mm
Black-painted steel — **038634** | 10 | - | 10
Stainless steel — **038644** | 10 | - | 10

Performa Deviators



Full-size scale

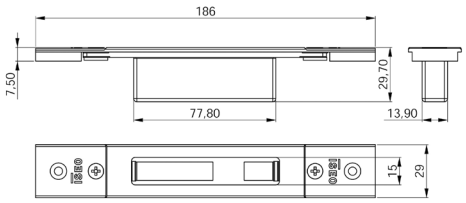


Door profile


ALCAN abithal Keeper Porta 53-60 / Abithal Keeper Porta 61-68
Abithal Porta / Winner Porta
ALCOA fb 12 Blindato / Formula F40 Porta / Formula F40 Tt Porta
Formula F50 Porta / Formula F50 Tt Porta / Formula F60 Tt Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO all.Co 5 Porta / All.Co 5 Tt Porta / Export 50 Porta
Export 50 Tt Porta / Sicurblin 65
ALNOR montreal Porta
ALU-K alublindo / N 45 Porta / N 53 Porta / N 55 Tt Porta
N 62 Tt Porta
ALU-MEC synthesis 57 Porta / Synthesis 60Tt Porta
ALUSUISSE alsec 2000 Porta 59 / Alsec 2000 Porta 69
BODEGA extrablind 70
DOMAL domal Break 52 Porta / Domal Break 70 Porta
Domal Security Porta / Domal Shops Porta / Domal Stopper Pg Porta
ESA blindal 60 Porta 1 Anta / Blindal 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / Blindal 70 Porta 2 Ante
FRESIA global 48 Porta
INDINVEST alpha 445 Porta 2 Ante
METRA nc 45 International Porta / Nc 45 Superthermic Porta
Nc 55 International Porta / Nc 68 Superthermic Porta
Nuovo Nc 50 Porta / Superblindo
NEW TEC new Tec 50 Porta Complanare
New Tec 52 Tt Porta Complanare / New Tec 68 Tt Porta Complanare
OCMAfc 60 Tt Porta / Sv 47 Porta 1 Anta / Sv 47 Porta 2 Ante
Sv 62 Porta 1 Anta / Sv 62 Porta 2 Ante / Sv 62 Tt Porta 1 Anta
Sv 62 Tt Porta 2 Ante
PASSERINI ekip Blindo / Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante / Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante
Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante / Ekip Thermo 53 Porta
PROFILATI "Pe ""Eku 53"" Porta"
"Pe ""Eku 64 Tt"" Porta"
"Pe ""Eku 72 Tt"" Porta"
SCHÜCO royal 78 St Blindato / Royal S 50 N / Royal S 55 Tt
Royal S 65 Tt
WICONA l60-A / L70-A

ADJUSTABLE closed striking plate for **DEVIATORS** PERFORMA. Flat front plate **29x186**
with vertical adjustment from 7 to 12 mm
and horizontal adjustment ± 2mm

	Code	Single package	Multiple package	Min. ord.
Black-painted steel	**038720**	10	-	10
Stainless steel	**038730**	10	-	10



Full-size scale

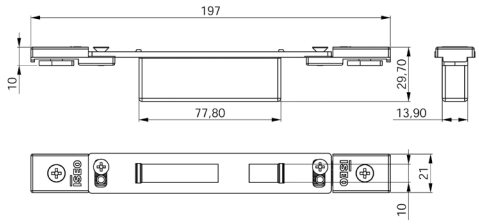

Euro groove


ALCAN abithal Cristal / Abithal Keeper Porta C.E. / Winner Finestra
ALCOA fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 REVERSIBLE
R 35 Sormonto
ALL.CO export 40 Finestra / Export 45 Tt Finestra / Export 50
Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
ALU-MEC synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
ALUSUISSE alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
BODEGA bga 50 / New Bt 60
DOMAL domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
EQUIPE sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante / Sistema 8000 Tt Finestra
1 Anta
Sistema 8000 Tt Finestra 2 Ante
ESA isola Porta
ESEDRA ga 53 Porta / Tt 63 Porta / Tt 75 Porta
INDINVEST gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto / Gold 600
Complanare
Gold 600 Sormonto
METRA nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Nuovo Nc 40 Sorm. 2 Ante Con Riporto
Nuovo Nc 40 Sormonto 1 Anta
MORELLI ma 8300
OCMA fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
PASSERINI ekip 40 Evoluzione 1 Anta / Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 1 Anta / Ekip 40 Sormonto 2 Ante
Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra
Ekip Maastricht Th 68 Finestra
PROFILATI "Pe ""Eku 53"" Finestra"/ "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra"/Sistema 1 Pe 40 Comp./Est. 1 Anta
Sistema 1 Pe 40 Sormonto 1 Anta / Sistema 1 Pe 50 Comp./Est. 1 Anta
Sistema 1 Pe 50 Sormonto 1 Anta

ADJUSTABLE closed striking plate for **DEVIATORS** PERFORMA, Flat front plate **22x197**
with vertical adjustment through threaded plates
and horizontal adjustment ± 9 mm


	Code	Single package	Multiple package	Min. ord.
Black-painted steel	**038721**	10	-	10
Stainless steel	**038731**	10	-	10

ISEO ULTIMATE ACCESS TECHNOLOGIES

Performa Deviators




Full-size scale

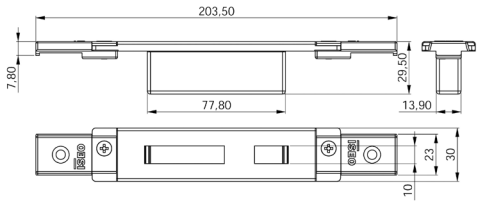


ALCOA alublind / R 40 RÉVERSIBLE 1 Anta / R 40 RÉVERSIBLE 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare
ALL.CO all.Co 5 RÉVERSIBLE / All.Co 5 Sormonto / Ites P4 Sormonto
ALU-K n 45 RÉVERSIBLE
ESA giuntall Porta
FRESIA global 41 Complanare / Global 41 Sormonto
Global 48 Complanare / Global 48 Sormonto / Global 70 Taglio Termico
METRA nuovo Nc 50 Sormonto 1 Anta / Nuovo Nc 50 Sormonto 2 Ante
New Tecnew Tec 50 Porta Sormonto / New Tec 52 Tt Porta Sormonto
New Tec 60 Tt Porta Sormonto / New Tec 68 Tt Porta Sormonto
PASSERINI ekip 50 Sormonto 1 Anta / Ekip 50 Sormonto 2 Ante

ADJUSTABLE closed striking plate for **DEVIATORS**
PERFORMA. Black-painted zamak.
Flat front plate **30x5,5x203,5**
horizontal adjustment ± 9 mm

Code	Single package	Multiple package	Min. ord.
038722	10	-	10




Full-size scale

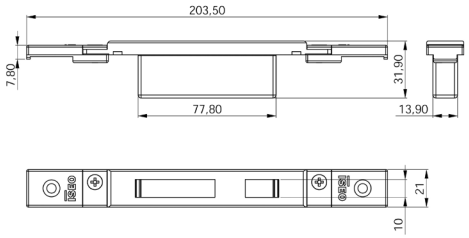


ALL.CO all.Co 5 Complanare / Ites P4 Complanare
ALNOR blindo Block / Montreal G.A.
ALU-K n 53 Complanare / N 55 Tt Complanare
ESA giuntall Complanare
INDINVEST alpha 255 Complanare / Alpha 370 Tt Complanare
Alpha 445 Finestra / Alpha 445 Porta 1 Anta
Alpha 658 Tt Complanare / Alpha Blitz 2000
Alpha Globo 45 / Alpha Globo 55
METRA nuovo Nc 40 Complanare / Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 50 Complanare
PASSERINI ekip 40 Complanare 1 Anta / Ekip 40 Complanare 2 Ante
Ekip 50 Complanare 1 Anta / Ekip 50 Complanare 2 Ante
Ekip Thermo 53 Finestra 1 Anta / Ekip Thermo 53 Finestra 2 Ante
Ekip Thermo 58 Finestra 1 Anta / Ekip Thermo 58 Finestra 2 Ante
PROFILATI sistema 1 Pe 40 Comp./Est. 2 Ante
Sistema 1 Pe 40 Sormonto 2 Ante
Sistema 1 Pe 50 Comp./Est. 2 Ante
Sistema 1 Pe 50 Sormonto 2 Ante

ADJUSTABLE closed striking plate for **DEVIATORS**
PERFORMA. Black-painted zamak.
Flat front plate **21x8x203,5**
horizontal adjustment ± 9 mm

Code	Single package	Multiple package	Min. ord.
038723	10	-	10



Full-size scale

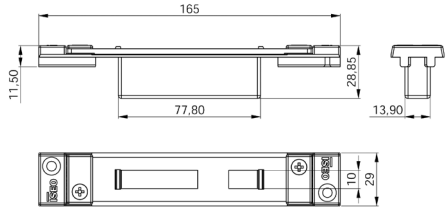

"Erre" profile

ALCOA alublind / R 40 RÉVERSIBLE 1 Anta
R 40 RÉVERSIBLE 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare

ADJUSTABLE closed striking plate for **DEVIATORS**
PERFORMA. Flat front plate **29x165**
horizontal adjustment ± 13 mm


	Code	Single package	Multiple package	Min. ord.
Black-painted steel	**038724**	10	-	10
Stainless steel	**038734**	10	-	10

Performa Mechanical version

Code	Single package	Multiple package	Min. ord.



Full-size scale




ALCOA Fb 12 Blindato
Fb 12 Trad./Revamping
Gr 9
Plana 1 Anta
ESA Blindal 60 Porta 1 Anta
Blindal 60 Porta 2 Ante
ESA Blindal 70 Porta 1 Anta
Blindal 70 Porta 2 Ante
SCHÜCO Royal S 50 N
Royal S 55 Tt
Royal S 65 Tt

Striking plates
FOR CENTRAL LOCK PERFORMA.

Stainless steel. Flat front plate **24x3x180**	**038230**	10	-	10
Nickel plated steel. Flat front plate **24x3x180**.	**038230H3**	10	-	10


Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 RÉVERSIBLE
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra"

Striking plates
FOR CENTRAL LOCK PERFORMA.

Stainless steel. Flat front plate **22x3x180**.	**038231**	10	-	10



Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 RÉVERSIBLE
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra"

Striking plates
FOR CENTRAL LOCK PERFORMA.

Stainless steel. Flat front plate **22x1,5x180**.	**038235**	10	-	10

Performa Mechanical version

	Code	Single package	Multiple package	Min. ord.




METRA PARETI MOBILI



Full-size scale

Striking plates
FOR CENTRAL LOCK PERFORMA.
Stainless steel. Flat front plate **20x3x180.** **038228** 10 - 10




METRA PARETI MOBILI



Full-size scale

Front plate **ROUND EDGE**. Striking plates
FOR CENTRAL LOCK PERFORMA.
Stainless steel. Flat front plate **20x3x180**. **038229** 10 - 10



ALCOA Fb 12 Blindato
Fb 12 Trad./Revamping
Gr 9
Piana 1 Anta
ESA Blindal 60 Porta 1 Anta
Blindal 60 Porta 2 Ante
ESA Blindal 70 Porta 1 Anta
Blindal 70 Porta 2 Ante
SCHÜCO Royal S 50 N
Royal S 55 Tt
Royal S 65 Tt



Full-size scale

Striking plates
FOR DEVIATORS PERFORMA.
Stainless steel. Flat front plate **24x3x132.** **038220** 10 - 10
Nickel plated steel. Flat front plate **24x3x132**. **038220H3** 10 - 10


ISEO ULTIMATE ACCESS TECHNOLOGIES

Performa Mechanical version

	Code	Single package	Multiple package	Min. ord.




Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 RÉVERSIBLE
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra"

Striking plates
FOR DEVIATORS PERFORMA.
Stainless steel. Flat front plate **22x3x132**. **038221** 10 - 10



Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 RÉVERSIBLE
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / **Domal** Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra
"Pe" Eku 72 Tt Finestra

Striking plates
FOR DEVIATORS PERFORMA.
Stainless steel. Flat front plate **22x1,5x132**. **038225** 10 - 10




Full-size scale



Metra Pareti mobili

Contropiastra **ARROTONDATA**
PER DEVIATORI PERFORMA.
In acciaio INOX. Frontale piatto **20x3x132**. **038226** 10 - 10

Performa Mechanical version

		Code	Single package	Multiple package	Min. ord.
 Full-size scale	 **Metra** Pareti mobili Striking plates **FOR DEVIATORS** PERFORMA. Stainless steel. Flat front plate **20x3x132**.	**038227**	10	-	10



Top EXIT DGT

Automatic lock

Top EXIT DGT

Top Exit DGT is a smart closing device conceived and manufactured specifically for applications on metal frames in steel and aluminum.

Key points

The motorized movement of the deadbolts (and latchbolt) during both opening and closing operations is controlled by specific sensors and a powerful microprocessor, which guarantee constant security.

The lock software allows to manage the “hold open” function: the deadbolts are constantly unlocked allowing free entrance to anybody.

Top Exit DGT is available in two different versions that suit any application exigency:
- TYPE B with motorized deadbolts and mechanical latchbolt (manual operation)
- TYPE C with motorized deadbolts and latchbolt

All the versions can operate mechanically too, because the european cylinder and/or panic exit device operations don’t depend on power supply and impediments deriving from the contemporary operation of the motor.

The control unit allows the opening from exterior through accessories such as proximity readers, radio remote controls and electronic keys and through the connection to centralized access control systems.


ICIM

Certificazione di Prodotto
Product Certification

110BE/0

ISEO SERRATURE S.p.A.

It is certified

Top Exit DGT has been conceived and manufactured in compliance with European standards EN1125, EN179, EN12209, prEN15685 and 14846.

Classification EN1125

3	7	6	A	1	4	2	2	A	B

Classification EN12209

2	X	8	0	0	G	7	H	A	2	0

Classification prEN15685:12

2	X	8	0	0	G	7	0	0	0

Classification EN14846

2	X	8	0	0	G	7	1	0

Classification EN179

3	7	6	A	1	4	4	2	A	B/D

ISEO
ULTIMATE ACCESS TECHNOLOGIES

ICIM
CERTIFIED PRODUCT

Code


Single package


Multiple package


Min. ord.


Top EXIT DGT



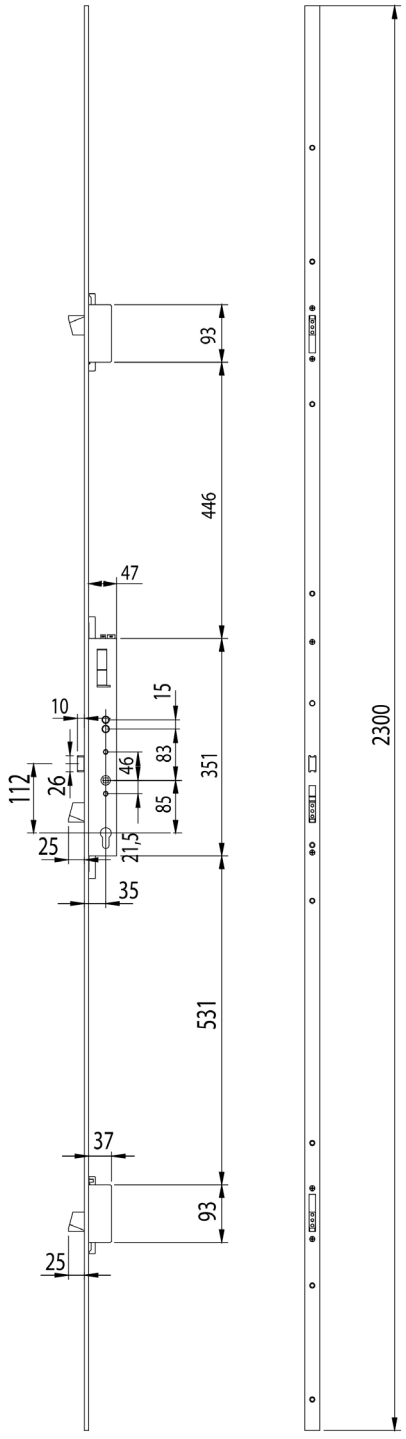



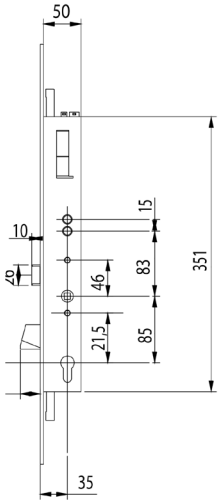

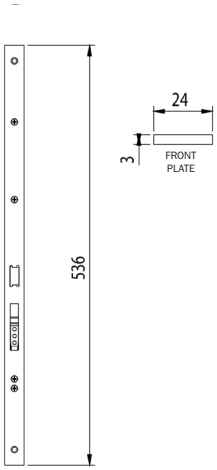

Top EXIT DGT


Code	Single package	Multiple package	Min. ord.

CE 0425

left outside

right outside

Type B.
Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Three lateral self-blocking bolts.
Latch in nickel-plated brass.
Front plate 2300 mm in stainless steel.
With motor dead bolts and mechanical latch.




UNI EN 179
UNI EN 1125
UNI EN 14846
UNI EN 12209

SINGLE LOCKING POINT

Backset mm 35 - Centre distance 85 - ⍁ 8 mm

right-hand	**70721.68.8501**	1	-	1
left-hand	**70721.68.8502**	1	-	1



UNI EN 179
UNI EN 1125
UNI EN 14846
pr EN 15685

THREE LOCKING POINT

Backset mm 35 - Centre distance 85 - ⍁ 8 mm


right-hand	**71741.68.8501**	1	-	1
left-hand	**71741.68.8502**	1	-	1

CE 0425

left outside

right outside

Type C.
Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Three lateral self-blocking bolts.
Latch in nickel-plated brass.
Front plate 2300 mm in stainless steel.
With motor dead bolts and latch.




UNI EN 179
UNI EN 1125
UNI EN 14846
UNI EN 12209

SINGLE LOCKING POINT

Backset mm 35 - Centre distance 85 - ⍁ 8 mm

right-hand	**70721.78.8501**	1	-	1
left-hand	**70721.78.8502**	1	-	1



UNI EN 179
UNI EN 1125
UNI EN 14846
pr EN 15685

THREE LOCKING POINT

Backset mm 35 - Centre distance 85 - ⍁ 8 mm


right-hand	**71741.78.8501**	1	-	1
left-hand	**71741.78.8502**	1	-	1

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Code	Single package	Multiple package	Min. ord.


Accessories



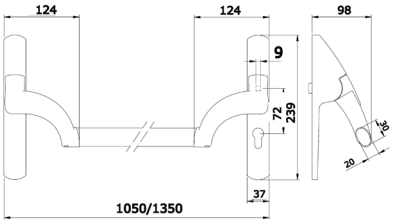

Palmo panic exit device to be combined with TOP EXIT DGT 70721*, 70741* series locks
Reversible, steel bar.

Lateral devices - *Centre distance 85 - ⍁ 8 mm	**949.0000.5048..IF**	1	-	1



Horizontal oval bar for panic exit devices **Palmo**. Lenght mm 1130.


INOX	**945922**	1	-	1
ENDUR4NCE	**94592R**	1	-	1
Painted WHITE	**945924**	1	-	1
Painted BLACK	**945925**	1	-	1
Painted RED	**945928**	1	-	1
Painted METAL GREY	**945927**	1	-	1



Microswitch, to be fitted in exit devices.
SERIES 9490.

Can be used in conjuction with security systems. Fixing screws. Instructions sheet.	**94100160**	1	-	1



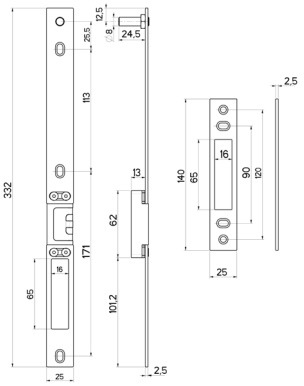

Set of striking plates. In stainless steel.
Adjustable and reversible.
For THREE LOCKING POINT version.


For locks type B and C EN 1125	**98.1741.50**	1	-	1



Striking plate
In stainless steel
Adjustable and reversible
For SINGLE LOCKING POINT version.


For locks type B and C EN 1125	**200.00.1741.5000**	1	-	1

Accessories



Cable passage flexible, flush version
L=260 - Opening until 90°

Code	Single package	Multiple package	Min. ord.
0000881000000	1	-	1




Cable passage flexible, flush version
L=68 - Opening until 180°

Code	Single package	Multiple package	Min. ord.
0000060130000	1	-	1

ISEO
ULTIMATE ACCESS TECHNOLOGIES


Top EXIT



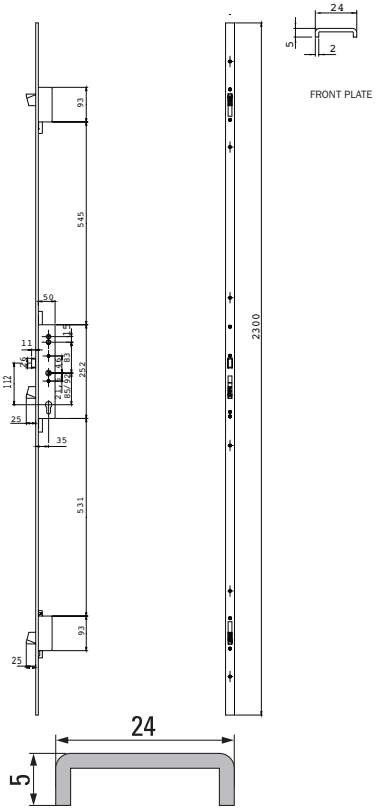

Type A.
Multipoint lock with panic function, European profile cylinder.
Three self-locking lateral deadbolts.
2300 mm stainless steel front plate.
Nickel-plated reversible latch bolt.
One-piece handle follower: internal anti-panic handle, external fixed knob.

	Code	Single package	Multiple package	Min. ord.
Backset mm 35 - Centre distance 85 - ⍁ 8 mm	**71741.28.85**	1	-	1
Backset mm 35 - Centre distance 92 - ⍁ 9 mm	**71741.29.92**	1	-	1







Type B.
Multipoint lock with panic function, European profile cylinder.
Three self-locking lateral deadbolts.
2300 mm stainless steel front plate.
Right/left latch bolt in nickel-plated brass.
Two-piece handle follower: internal anti-panic handle, external handle operating the latch only.


	Code	Single package	Multiple package	Min. ord.
Backset mm 35 - Centre distance 85 - ⍁ 8 mm - right-hand	**71741.28.8501**	1	-	1
Backset mm 35 - Centre distance 85 - ⍁ 8 mm - left-hand	**71741.28.8502**	1	-	1
Backset mm 35 - Centre distance 92 - ⍁ 9 mm - right-hand	**71741.29.9201**	1	-	1
Backset mm 35 - Centre distance 92 - ⍁ 9 mm - left-hand	**71741.29.9202**	1	-	1

ISEO
ULTIMATE ACCESS TECHNOLOGIES

	Code	Single package	Multiple package	Min. ord.


Accessories



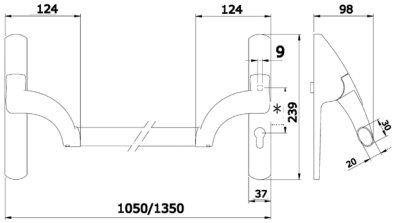

Palmo panic exit device to be combined with TOP EXIT 71741* series locks
Reversible, steel bar.

Lateral devices - *Centre distance 85 - ⍁ 8 mm	**949.0000.5048..IF**	1	-	1
Lateral devices - *Centre distance 92 - ⍁ 9 mm	**949.0000.5049..IF**	1	-	1



Horizontal oval bar for panic exit devices **Palmo**. Lenght mm 1130.


INOX	**945922**	1	-	1
ENDUR4NCE	**94592R**	1	-	1
Painted WHITE	**945924**	1	-	1
Painted BLACK	**945925**	1	-	1
Painted RED	**945928**	1	-	1
Painted METAL GREY	**945927**	1	-	1



Microswitch, to be fitted in exit devices.
SERIES 9490.

Can be used in conjuction with security systems. Fixing screws. Instructions sheet.	**94100160**	1	-	1




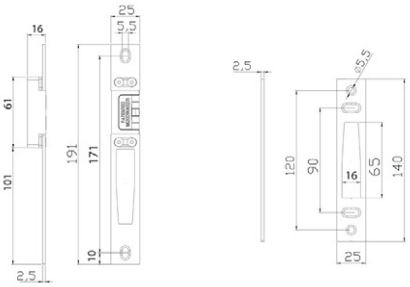


Set of Striking plates, in stainless steel, adjustable and reversible.
For TOP EXIT series locks.

Multipoint locks EN 1125	**98.1741.00**	1	10	10

Accessories



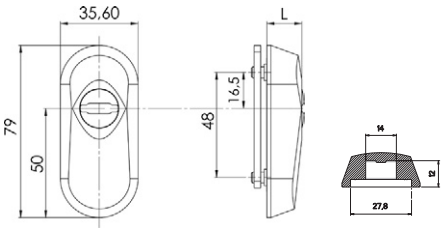


IRON. Escutcheon for European profile cylinder. Tempered steel.

	Code	Single package	Multiple package	Min. ord.
For projecting cylinders 4 mm to 11,3 mm.				
Satin nickel plated - L = 16 mm	**98050204**	1	-	1
Black painted - L = 16 mm	**98050205**	1	-	1
Polished brass-plated - L = 16 mm	**98050206**	1	-	1
For projecting cylinders 4 mm to 7,4 mm.				
Satin nickel plated - L = 12 mm	**98050104**	1	-	1
Black painted - L = 12 mm	**98050105**	1	-	1
Polished brass-plated - L = 12 mm	**98050106**	1	-	1


Accessories

	Code	Single package	Multiple package	Min. ord.




Gâche en acier inox.
Pour article 0721/0722

	200.00.0721.0000	12	-	12



Strike-plate.
For item 0713/0714/0723/0724

Stainless steel	**200.00.0726.0000**	12	-	12
Zinc-plated iron	**200.00.0716.0200**	12	-	12



Strike-plate in steel, zinc-plated.
For item 903K

	200.00.0903.0016	12	-	12



Thesis 2.0

High security solenoid bolt

Thesis 2.0

Thesis 2.0 is a range of electro-mechanical locks which transforms a simple door in a smart access and makes it even safer and more functional thanks to its performances.
Unlike the traditional electric locks, its security status is automatically restored with a locking time which can be set according to any needs.
The Thesis 2.0 models ensure a high anti-intrusion security, and the opening operation can be controlled by transponders, contactless cards and/or PIN codes.
The range of Stylos credential readers and controllers dialog with Thesis 2.0 Standard in a direct way through Lockbus interface, i.e. without intermediate electronic devices.

Key Points

The technology and materials chosen for THESIS 2.0 Standard guarantee its durability, which is much longer than the standard requirements.

Innovative electronics with power reserve (booster) warrant an efficient deadbolt movement in difficult operating conditions: even with 8 Volts only.


Power supply from 8 to 30Vdc 1A. Its operation is warrant also in complex installations and critical situations.
Flexible installation conditions and low power consumption.

Thesis 2.0 guarantees a trouble-free operation even if installed horizontally. It represents the ideal solution for automatic sliding doors.

The Lockbus interface allows the direct connection with Iseo Stylos Line credential readers, for a simple but effective access control management.

It can operate in interlock mode (manual or automatic) for bidirectional doors without any external control device.

Thesis 2.0 Range



Thesis 2.0 Standard

A steel deadbolt with a 20 mm extension ensures a high anti-intrusion security (level 3 according to EN12209 standard).

Available both Fail Secure mode (N.C. Normally Closed) and Fail Safe mode (N.O. Normally Open) versions.

Thesis 2.0 Standard Latchbolt



It has the same features of the Standard version. Thanks to its self-locking and self-ejecting latchbolt, it works also as a traditional mechanical security lock.
It guarantees door locking, even if in case of lack of power supply, always in maximum security and comfort.

A steel autolocking self-ejecting latchbolt with a 20 mm extension ensures a high anti-intrusion security (level 3 according to EN12209 standard).
The latchbolt ensures a typical mechanic lockcase functioning also in absence of the power supply. The door closing is always effective thanks to the latchbolt function.

Available only in Fail Secure mode (N.C. Normally Closed) version.

Thesis 2.0 Professional



It is the Heavy Duty version of the Thesis 2.0 Standard. It combines the functions of the standard version to the soundness and anti-manipulation resistance, which make it the ideal solution for professional installations where maximum passive security and high use frequency are required, such as shops, banks and public offices entrances.

The technology and materials chosen for THESIS 2.0 Professional guarantee its durability, which is much longer than the standard requirements (even over 1 million operating cycles).
A hardened steel deadbolt with a 18 mm diameter, and 22 mm extension and a 4 mm stainless steel front plate ensure a high anti-intrusion security (level 7 according to EN12209 standard).
The operation is guaranteed even in case of a residual lateral load up to 15N and of a bad door alignment. This is why it is at the top of the market.

Available both Fail Secure mode (N.C. Normally Closed) and Fail Safe mode (N.O. Normally Open) versions.




Thesis 2.0 Professional Mini

It has the same features as the Professional version but its case is smaller and it can't be operated through handle and cylinder. It is the ideal solution for installations where only the electric operation of the lock is required, eventually combined with other classic closing systems.

Available both Fail Secure mode (N.C. Normally Closed) and Fail Safe mode (N.O. Normally Open) versions.

Thesis 2.0


ON INTERLOCKED DOORS

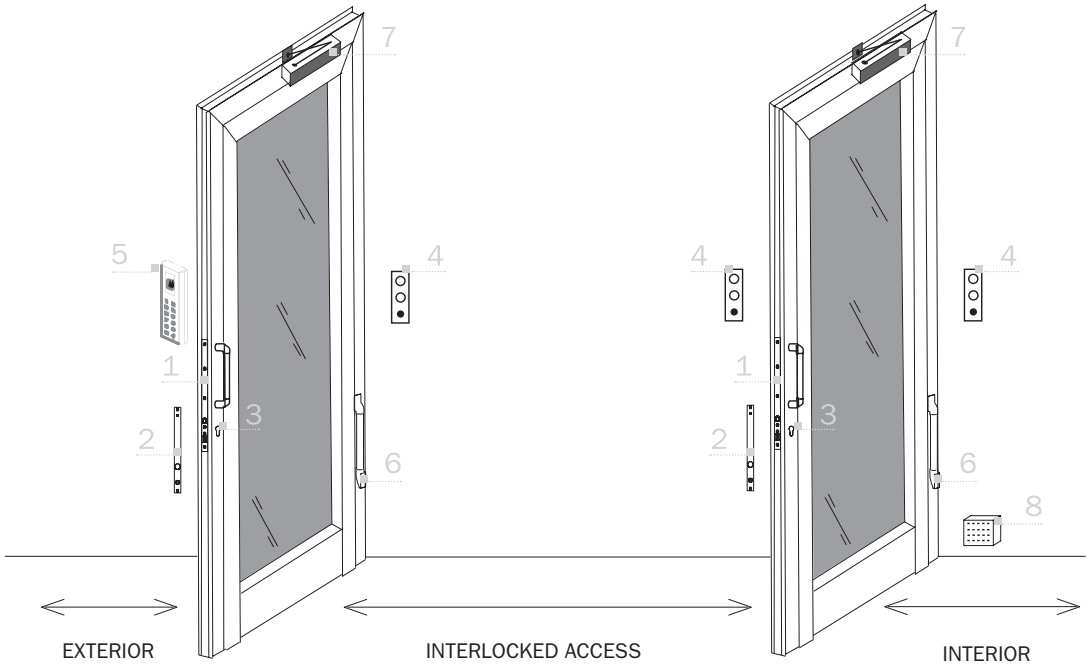

1. Thesis 2.0 lock
2. Striking plate
3. European profile cylinder
4. Status indicator with pushbutton
5. Stylos reader
6. Concealed lead covers
7. Door closer
8. Power supply unit

Thesis 2.0

ON SINGLE DOORS

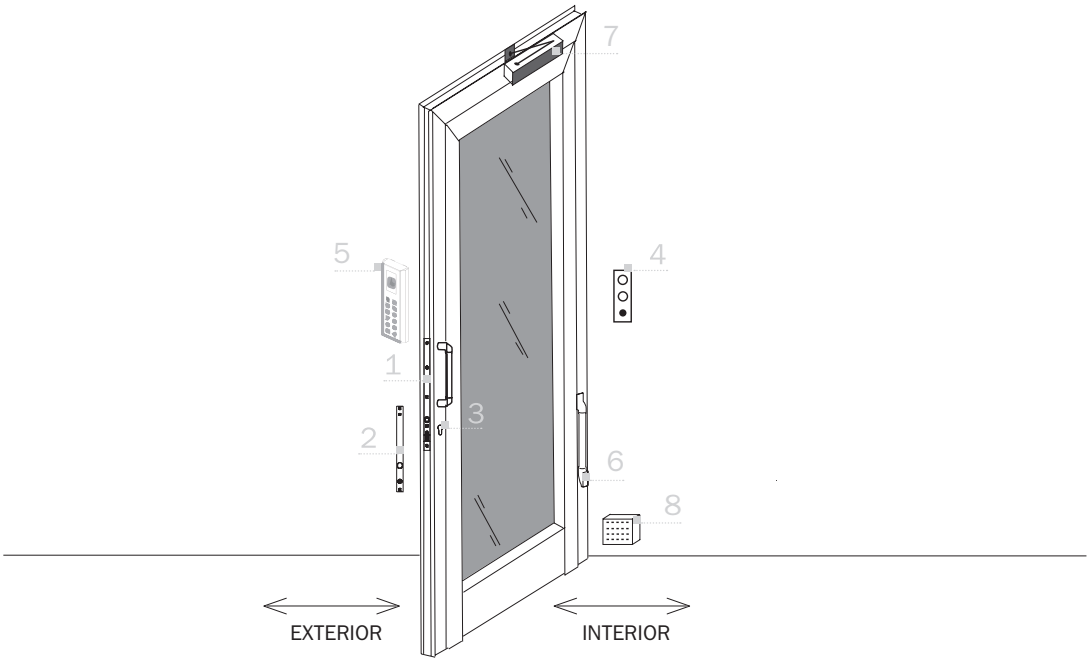

1. Thesis 2.0 lock
2. Striking plate
3. European profile cylinder
4. Status indicator with pushbutton
5. Stylos reader
6. Concealed lead covers
7. Door closer
8. Power supply unit

Thesis 2.0 Standard

Thesis 2.0 Standard transforms a simple door in a smart access and makes it even safer and more functional thanks to its performances. Unlike the traditional electric locks, its security status is automatically restored with a locking time which can be set according to any needs.
A steel deadbolt with a 20 mm extension ensures a high anti-intrusion security, and the opening operation can be controlled by transponders, contactless cards and/or PIN codes.
The range of Stylos credential readers and controllers dialogs with Thesis 2.0 Standard in a direct way through Lockbus interface, i.e. without intermediate electronic devices.

Key points

The technology and materials chosen for THESIS 2.0 Standard guarantee its durability, which is much longer than the standard requirements.

Innovative electronics with power reserve (booster) guaranteeing an efficient deadbolt movement in difficult operating conditions: even with 8 Volts only.

A steel deadbolt with a 20 mm extension ensures a high anti-intrusion security (level 3 according to EN12209 standard).

Power supply from 8 to 30Vdc 1A. Its operation is guaranteed also in complex installations and critical situations.
Flexible installation conditions and low power consumption.

Thesis 2.0 Standard guarantees a trouble-free operation even if installed horizontally.

It represents the ideal solution for automatic sliding doors.

The Lockbus interface allows the direct connection with Iseo Stylos Line credential readers, for a simple but effective access control management.

Available both Fail Secure mode (N.C. Normally Closed) and Fail Safe mode (N.O. Normally Open) versions.
It can operate in interlock mode (manual or automatic) for bidirectional doors without any external control device.


ICIM

Certificazione di Prodotto
Product Certification

005CI/1

FIAM S.r.l.
Via Don Fasola, 4
22069 ROVELLASCA (CO) ITALY


It is certified

Thesis 2.0 Standard is conceived and manufactured in compliance with European standards EN 14846:08, with the following classification:

3	C	8	0	0	G	3	0/1	1	*

(*) 0 = in combination with STATUS INDICATOR
1 = in combination without STATUS INDICATOR

Thesis 2.0 Standard



Technical features

Backset: 25/30/35 mm

Deadbolt:
- hardened inox steel;
- cutting resistant (free rotating);
- Ø14 mm diameter;
- single throw;
- 20 mm extension.
- to prolong the life of the solenoid bolt the shape of the bolt guide has been improved by strengthening the collar.

European profile cylinder hole.

Handle follower (optional): 8 mm;
Centre distance between handle follower and cylinder: 85 mm

Front plate:
- inox steel;
- 25x371 mm – thickness 3 mm;
- door positioning sensor and alignment device.

Striking plate:
- Inox steel;
- 25x367 mm – thickness 3 mm;
- 2 oval fixing holes for 4 mm vertical regulation and a central hole for definitive fixing;
- adjustable depending on the distance between the lock and the striking plate;

Case dimensions:
- thickness 22 mm
- length 280 mm
- depth 38/43/48 mm

DC supply voltage range: 8÷30Vdc.
Max. absorbed current power in operation: 1A.
CC power supply min. characteristics: 8÷30Vdc15W.

Opening control:
- opto-isolated input 8÷24Vdc/12Vac;

Max voltage and current applicable to signalling relay:
- 24Vdc 1A;
- 120Vac 0.5A.

Programmable status signal:
- secured door status;
- door status;
- bolt status;
- command for motorized door opener.

Lockbus connection:
- data communication and power supply on the same 3 wire connections;
- maximum length 100 mt;
- secure devices authentification;
- encrypted data transmission for high security against hacking.

Thesis 2.0 Standard

Adjustable timings:
- door opening time (courtesy time): 1÷180 sec. (15 sec. default);
- delayed closure time (at closing of the door): 1÷60 sec. (1 sec. default).

Environmental features:
- operating temperature: -20°C÷+60°C;
- storage temperature: -25°C÷+70°C;
- protection level (IP grading): IP44;

Reference Standard: EN 14846:2008;
grading: 3 C 8 0 0 G 3 0 1
3 C 8 0 0 G 3 1 1 (in combination with STATUS INDICATOR).

Options and Versions:

With and without handle follower

Operating modes in case of power failure:
- Fail Secure mode (N.C. Normally Closed)
- Fail Safe mode (N.O. Normally Open)
The new implementation will allow the mechanical key override retraction to be fully mechanical and not reliant on a power source to assist with the bolt withdrawal.

Operating software:
- single door;
- bidirectional doors with manual interlock functionality (*);
- bidirectional doors with automatic interlock functionality (*);
(*) direct connection between the 2 locks with encrypted communication.

Lockbus

LOCAL BUS

All devices belonging of the THESIS range are compatible with ISEO Lockbus.

Lockbus is a powerful multipoint bus sharing data transmission and power supply on the same 3-wire connection for utmost flexibility, easy installation and consequently, cost optimization.


Lockbus highlights:


Data transmission and power supply on the same 3-wire connection up to 100 m;

Self-adjusting power supply from 8Vdc to 30Vdc;

Secure device authentication (among readers and actuators) and encrypted data transmission for high security against manipulation.

Thesis 2.0 Standard



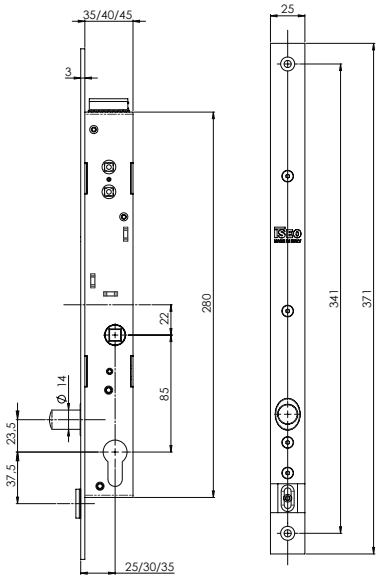



DROPBOLT FAIL SECURE WITH HANDLE FOLLOWER.
Hardened steel bolt, Ø14 mm diameter, one throw, 20 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
Handle follower 8 mm.
European profile cylinder hole.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection, handle follower.

Handle follower/cylinder centre distance 85 mm

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 25 mm.	**07500802521**	1	-	1
Single door software. Backset 30 mm.	**07500803021**	1	-	1
Single door software. Backset 35 mm.	**07500803521**	1	-	1
Manual interlock software. Backset 25 mm.	**0750M802521**	1	-	1
Manual interlock software. Backset 30 mm.	**0750M803021**	1	-	1
Manual interlock software. Backset 35 mm.	**0750M803521**	1	-	1
Automatic interlock software. Backset 25 mm.	**0750A802521**	1	-	1
Automatic interlock software. Backset 30 mm.	**0750A803021**	1	-	1
Automatic interlock software. Backset 35 mm.	**0750A803521**	1	-	1

Thesis 2.0 Standard



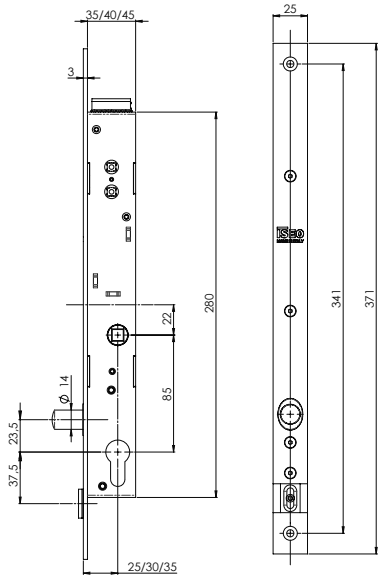



DROPBOLT FAIL SAFE WITH HANDLE FOLLOWER.
Hardened steel bolt, Ø14 mm diameter, one throw, 20 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line
frame sensor. Handle follower 8 mm.
European profile cylinder hole.
Fail Safe mode. The new implementation will allow the mechanical key override retraction
to be fully mechanical and not reliant on a power source to assist with the bolt withdrawal.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws,
connector with rubber protection, handle follower.

Handle follower/cylinder centre distance 85 mm

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 25 mm.	**07500802522**	1	-	1
Single door software. Backset 30 mm.	**07500803022**	1	-	1
Single door software. Backset 35 mm.	**07500803522**	1	-	1
Manual interlock software. Backset 25 mm.	**0750M802522**	1	-	1
Manual interlock software. Backset 30 mm.	**0750M803022**	1	-	1
Manual interlock software. Backset 35 mm.	**0750M803522**	1	-	1
Automatic interlock software. Backset 25 mm.	**0750A802522**	1	-	1
Automatic interlock software. Backset 30 mm.	**0750A803022**	1	-	1
Automatic interlock software. Backset 35 mm.	**0750A803522**	1	-	1

Thesis 2.0 Standard




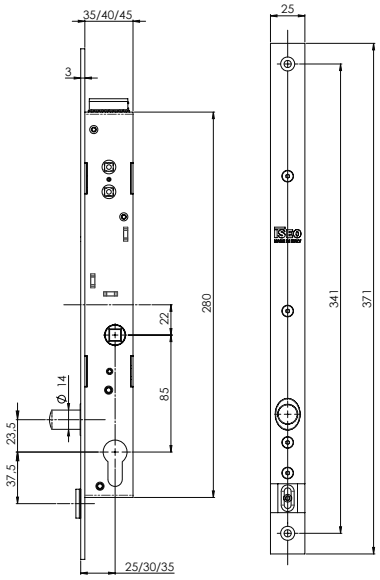


DROPBOLT FAIL SECURE WITHOUT HANDLE FOLLOWER.
Hardened steel bolt, Ø14 mm diameter, one throw, 20 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
No handle follower.
European profile cylinder hole.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection.

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 25 mm.	**07500002521**	1	-	1
Single door software. Backset 30 mm.	**07500003021**	1	-	1
Single door software. Backset 35 mm.	**07500003521**	1	-	1
Manual interlock software. Backset 25 mm.	**0750M002521**	1	-	1
Manual interlock software. Backset 30 mm.	**0750M003021**	1	-	1
Manual interlock software. Backset 35 mm.	**0750M003521**	1	-	1
Automatic interlock software. Backset 25 mm.	**0750A002521**	1	-	1
Automatic interlock software. Backset 30 mm.	**0750A003021**	1	-	1
Automatic interlock software. Backset 35 mm.	**0750A003521**	1	-	1

Thesis 2.0 Standard



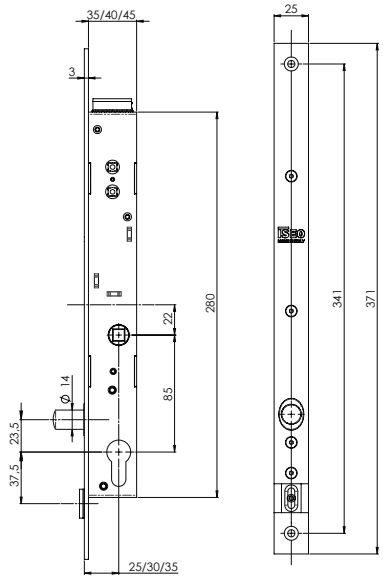

DROPBOLT FAIL SAFE WITHOUT HANDLE FOLLOWER.
Hardened steel bolt, Ø14 mm diameter, one throw, 20 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line
frame sensor. No handle follower.
European profile cylinder hole.
Fail Safe mode. The new implementation will allow the mechanical key override retraction to be fully mechanical and not reliant on a power source to assist with the bolt withdrawal.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws,
connector with rubber protection.

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 25 mm.	**07500002522**	1	-	1
Single door software. Backset 30 mm.	**07500003022**	1	-	1
Single door software. Backset 35 mm.	**07500003522**	1	-	1
Manual interlock software. Backset 25 mm.	**0750M002522**	1	-	1
Manual interlock software. Backset 30 mm.	**0750M003022**	1	-	1
Manual interlock software. Backset 35 mm.	**0750M003522**	1	-	1
Automatic interlock software. Backset 25 mm.	**0750A002522**	1	-	1
Automatic interlock software. Backset 30 mm.	**0750A003022**	1	-	1
Automatic interlock software. Backset 35 mm.	**0750A003522**	1	-	1

Thesis 2.0 Standard Latchbolt

Thesis 2.0 Standard Latchbolt has the same features of the Standard version. Thanks to its self-locking and self-ejecting latchbolt, it works also as a traditional mechanical security lock. It guarantees door locking, even if in case of lack of power supply, always in maximum security and comfort.

Key points

The technology and materials chosen for THESIS 2.0 Standard guarantee its durability, which is much longer than the standard requirements.

Innovative electronics with power reserve (booster) ensuring an efficient bolt movement in difficult operating conditions: even with 8 Volts only.

A steel autolocking self-ejecting latchbolt with a 20 mm extension ensures a high anti-intrusion security (level 3 according to EN12209 standard).

The latchbolt ensures a typical mechanic lockcase functioning also in absence of the power supply.

The door closing is always effective thanks to the latchbolt function.

Power supply from 8 to 30Vdc 1A. Flexible installation conditions and low power consumption.

The Lockbus interface allows the direct connection with Iseo Stylos Line credential readers, for a simple but effective access control management.

Available only in Fail Secure mode (N.C. Normally Closed).
It can operate in interlock mode (manual or automatic) for bidirectional doors without any external control device.


ICIM

Certificazione di Prodotto
Product Certification

005CI/1

FIAM S.r.l.
Via Don Favola, 4
22069 ROVELLASCA (CO) ITALY

3 C 8 0 0 G 3 01() 1

ICIM S.p.A.

It is certified

Thesis 2.0 Standard Latchbolt is conceived and manufactured in compliance with European standards EN 14846:08, with the following classification:

3	C	8	0	0	G	3	0/1	1	*

(*) 0 = in combination with STATUS INDICATOR
1 = in combination without STATUS INDICATOR

Thesis 2.0 Standard Latchbolt

Technical features

Backset: 25/30/35 mm

Latchbolt:
- hardened inox steel;
- Ø14 mm diameter;
- self-ejecting (mechanical);
- 20 mm extension;

European profile cylinder hole

Handle follower (optional): 8 mm;
Centre distance between handle follower and cylinder: 85 mm

Front plate:
- inox steel;
- 25x371 mm – thickness 3 mm;
- door positioning sensor and alignment device;

Striking plate:
- Inox steel;
- 25x330 mm – thickness 3 mm;
- 2 oval fixing holes for 4 mm vertical regulation and a central hole for definitive fixing;
- adjustable depending on the distance between the lock and the striking plate;

Case dimensions:
- thickness 22 mm
- length 280 mm
- depth 38/43/48 mm

DC supply voltage range: 8÷30Vdc.
Max. absorbed current power in operation: 1A.
CC power supply min. characteristics: 8÷30Vdc 15W.

Opening control:
- opto-isolated input 8÷24Vdc /12Vac;

Max voltage and current applicable to signalling relay:
- 24Vdc 1A;
- 120Vac 0.5A;

Programmable status signal:
- secured door status;
- door status;
- latchbolt status;
- command for motorized door opener;

Lockbus connection:
- data communication and power supply on the same 3 wire connections;
- maximum length 100 mt;
- secure devices authentification;
- encrypted data transmission for high security against hacking;

Adjustable timings:
- door opening time (courtesy time): 1÷180 sec. (15 sec. default);

Thesis 2.0 Standard Latchbolt

Environmental features:
- operating temperature: -20°C÷+60°C;
- storage temperature: -25°C÷+70°C;
- protection level (IP grading): IP44;

Reference Standard: EN 14846:2008;
grading: 3 C 8 0 0 G 3 0 1
3 C 8 0 0 G 3 1 1 (in combination with status indicator)

Options and versions:

With and without handle follower

Operating modes in case of power failure:
- Fail Secure mode (N.C. Normally Closed)
- Fail Safe mode (N.O. Normally Open)

Operating software:
- single door;
- bidirectional doors with manual interlock functionality (*);
- bidirectional doors with automatic interlock functionality (*);

(*) direct connection between the 2 lock with encrypted communication

Lockbus

LOCAL BUS

All devices belonging of the THESIS range are compatible with ISEO Lockbus.
Lockbus is a powerful multipoint bus sharing data transmission and power supply on the same 3-wire connection for utmost flexibility, easy installation and consequently, cost optimization.


LOCKBUS highlights:


Data transmission and power supply on the same 3-wire connection up to 100 m;

Self-adjusting power supply from 8Vdc to 30Vdc;

Secure device authentication (among readers and actuators) and encrypted data transmission for high security against manipulation.

Thesis 2.0 Standard Latchbolt



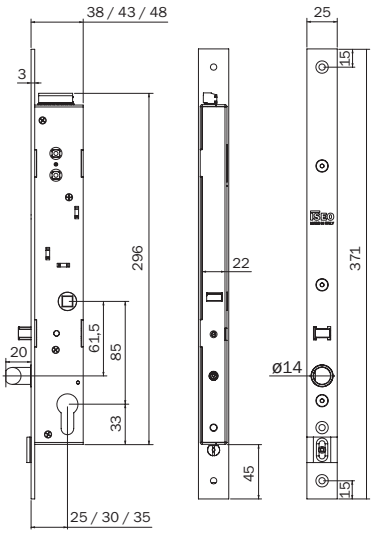



DROPBOLT FAIL SECURE WITH HANDLE FOLLOWER.
Reversible hardened steel latchbolt, Ø14 mm diameter,
self-locking, self-ejecting function, 20 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line
frame sensor.
Handle follower 8 mm.
European profile cylinder hole.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws,
connector with rubber protection, handle follower.

Handle follower/cylinder centre distance 85 mm

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 25 mm.	**07510802521**	1	-	1
Single door software. Backset 30 mm.	**07510803021**	1	-	1
Single door software. Backset 35 mm.	**07510803521**	1	-	1
Manual interlock software. Backset 25 mm.	**0751M802521**	1	-	1
Manual interlock software. Backset 30 mm.	**0751M803021**	1	-	1
Manual interlock software. Backset 35 mm.	**0751M803521**	1	-	1
Automatic interlock software. Backset 25 mm.	**0751A802521**	1	-	1
Automatic interlock software. Backset 30 mm.	**0751A803021**	1	-	1
Automatic interlock software. Backset 35 mm.	**0751A803521**	1	-	1

Thesis 2.0 Standard Latchbolt



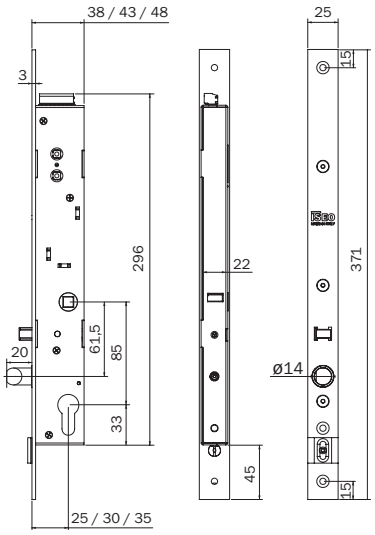

DROPBOLT FAIL SECURE WITHOUT HANDLE FOLLOWER.
Hardened steel latchbolt, Ø14 mm diameter,
self-ejecting function, 20 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
Without handle follower.
European profile cylinder hole.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection.

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 25 mm.	**07510002521**	1	-	1
Single door software. Backset 30 mm.	**07510003021**	1	-	1
Single door software. Backset 35 mm.	**07510003521**	1	-	1
Manual interlock software. Backset 25 mm.	**0751M002521**	1	-	1
Manual interlock software. Backset 30 mm.	**0751M003021**	1	-	1
Manual interlock software. Backset 35 mm.	**0751M003521**	1	-	1
Automatic interlock software. Backset 25 mm.	**0751A002521**	1	-	1
Automatic interlock software. Backset 30 mm.	**0751A003021**	1	-	1
Automatic interlock software. Backset 35 mm.	**0751A003521**	1	-	1

Thesis 2.0 Professional

Thesis 2.0 Professional is the Heavy Duty version of the Thesis 2.0 Standard. It combines the functions of the standard version to the soundness and anti-manipulation resistance, which make it the ideal solution for professional installations where maximum passive security and high use frequency are required, such as shops, banks and public offices entrances.
Thesis 2.0 transforms a simple door in a smart gate and makes it even safer and more functional because it restores automatically its security status thanks to the delayed time locking to be set directly from the end user according to his different needs. A steel deadbolt with a 22 mm extension ensures a high anti-intrusion security, and the opening operation
can be controlled by transponders, contactless cards and/or PIN codes. The range of Stylos credential readers and controllers dialog with Thesis 2.0 Professional in a direct way through Lockbus interface, i.e. without intermediate electronic devices, creating flexible and effective electronic access control solutions.

Key points

The technology and materials chosen for THESIS 2.0 Professional guarantee its durability, which is much longer than the standard requirements (even over 1 million operating cycles).

A hardened steel deadbolt with a 18 mm diameter, and 22 mm extension and a 4 mm stainless steel front plate ensure a high anti-intrusion security (level 7 according to EN12209 standard).

The operation is guaranteed even in case of a residual lateral load up to 15N and of a bad door alignment. This is why it is at the top of the market.

Innovative electronics with power reserve (booster) ensure an efficient deadbolt movement in difficult operating conditions: even with 8V only!

Power supply from 8 to 30Vdc 1A. Its operation is ensured also in complex installations and critical situations. Flexible installation conditions and low power consumption.

Thesis 2.0 Professional guarantees a trouble-free operation even if installed horizontally. It represents the ideal solution for automatic sliding doors.

The Lockbus interface allows the direct connection with Iseo Stylos Line credential readers, for a simple but effective access control management.

Available both Fail Secure mode (N.C. Normally Closed) and Fail Safe mode (N.O. Normally Open) versions.


ICIM

Certificazione di Prodotto
Product Certification

Certificato N. / Certificate No. 005CI/1

FIAM S.r.l.
Via Don Fasola, 4
23069 ROVELLASCA (CO) ITALY


It is certified

Thesis 2.0 Professional is conceived and manufactured in compliance with European standards EN 14846:08, with the following classification:

3	H	8	0	0	M	7	0/1	1	*

(*) 0 = in combination with STATUS INDICATOR
1 = in combination without STATUS INDICATOR

Thesis 2.0 Professional



Technical features

Backset: 30/35/40 mm

Deadbolt:
- hardened steel;
- diameter Ø18 mm;
- single throw
- extension 22 mm.

European profile cylinder hole

Handle follower (optional): 8 mm;
Centre distance between handle follower and cylinder: 85 mm

Front plate:
- inox steel;
- 30x371 mm – thickness 4 mm;
- door positioning sensor and alignment device;

Striking plate:
- Inox steel;
- 30x371 mm – thickness 4 mm;
- adjustable depending on the distance between the lock and the striking plate;

Case dimensions:
- thickness 27 mm
- length 280 mm
- depth 44/49/54 mm

DC supply voltage range: 8÷30Vdc.
Max. absorbed current power in operation: 1A.
CC power supply min. characteristics: 8÷30 VDC15W.

Opening control:
- opto-isolated input 8÷24Vdc/12Vac;

Max voltage and current applicable to signalling relay:
- 24Vdc 1A;
- 120Vac 0.5A;

Programmable status signal:
- secured door status;
- door status;
- latchbolt status;
- command for motorized door opener;

Lockbus connection:
- data communication and power supply on the same 3 wire connections;
- maximum length 100 mt;
- secure devices authentification;
- encrypted data transmission for high security against hacking;

Adjustable timings:
- door opening time (courtesy time): 1÷180 sec. (15 sec. default);
- delayed closure time (at closing of the door): 1÷60 sec. (1 sec. default).

Thesis 2.0 Professional

Environmental features:
- operating temperature: -20°C÷+60°C;
- storage temperature: -25°C÷+70°C;
- protection level (IP grading): IP44;

Reference Standard: EN 14846:2008;
grading: 3 H 8 0 0 M 7 0 1
3 H 8 0 0 M 7 1 1 (in combination with status indicator)

Options and versions:

With and without handle follower

Operating modes in case of power failure:
- Fail Secure mode (N.C. Normally Closed)
- Fail Safe mode (N.O. Normally Open)

Operating software:
- single door;
- bidirectional doors with manual interlock functionality (*);
- bidirectional doors with automatic interlock functionality (*);

(*) direct connection between the 2 lock with encrypted communication

Lockbus


LOCAL BUS


All devices belonging of the THESIS range are compatible with ISEO Lockbus.
Lockbus is a powerful multipoint bus sharing data transmission and power supply on the same 3-wire connection for utmost flexibility, easy installation and consequently, cost optimization.

Lockbus highlights:

Data transmission and power supply on the same 3-wire connection up to 100 m;
Self-adjusting power supply from 8Vdc to 30Vdc;
Secure device authentication (among readers and actuators) and encrypted data transmission for high security against manipulation.

Thesis 2.0 Professional



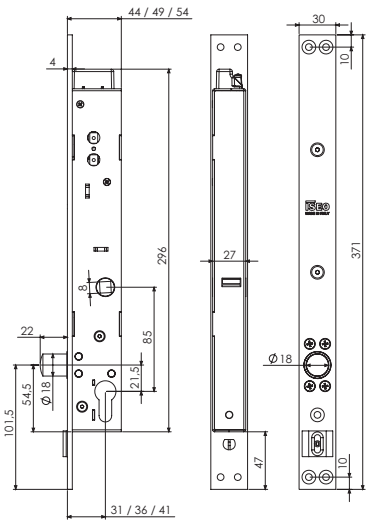



DROPBOLT FAIL SECURE WITH HANDLE FOLLOWER.
Hardened steel bolt, Ø18 mm diameter, one throw, 22 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
Handle follower 8 mm.
European profile cylinder hole.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection, handle bracket.

Handle follower/cylinder centre distance 85 mm

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 30 mm.	**07600823021**	1	-	1
Single door software. Backset 35 mm.	**07600823521**	1	-	1
Single door software. Backset 40 mm.	**07600824021**	1	-	1
Manual interlock software. Backset 30 mm.	**0760M823021**	1	-	1
Manual interlock software. Backset 35 mm.	**0760M823521**	1	-	1
Manual interlock software. Backset 40 mm.	**0760M824021**	1	-	1
Automatic interlock software. Backset 30 mm.	**0760A823021**	1	-	1
Automatic interlock software. Backset 35 mm.	**0760A823521**	1	-	1
Automatic interlock software. Backset 40 mm.	**0760A824021**	1	-	1

Thesis 2.0 Professional



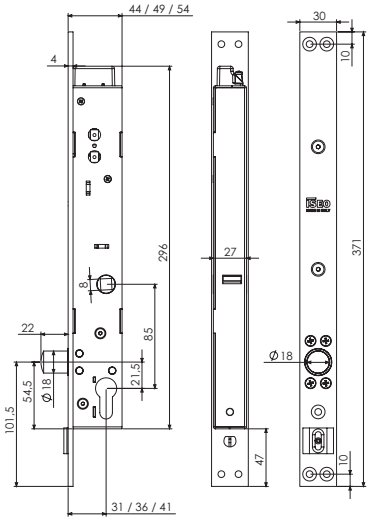



DROPBOLT FAIL SAFE WITH HANDLE FOLLOWER.
Hardened steel bolt, Ø18 mm diameter, one throw, 22 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
Handle follower 8 mm.
European profile cylinder hole.
Fail Safe mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection, handle bracket.
viti di fissaggio, connettore con protezione in gomma, quadro maniglia.

Handle follower/cylinder centre distance 85 mm

	Code	Single package	Multiple package	Min. ord.
Single door software. Backset 30 mm.	**07600823022**	1	-	1
Single door software. Backset 35 mm.	**07600823522**	1	-	1
Single door software. Backset 40 mm.	**07600824022**	1	-	1
Manual interlock software. Backset 30 mm.	**0760M823022**	1	-	1
Manual interlock software. Backset 35 mm.	**0760M823522**	1	-	1
Manual interlock software. Backset 40 mm.	**0760M824022**	1	-	1
Automatic interlock software. Backset 30 mm.	**0760A823022**	1	-	1
Automatic interlock software. Backset 35 mm.	**0760A823522**	1	-	1
Automatic interlock software. Backset 40 mm.	**0760A824022**	1	-	1

Thesis 2.0 Professional




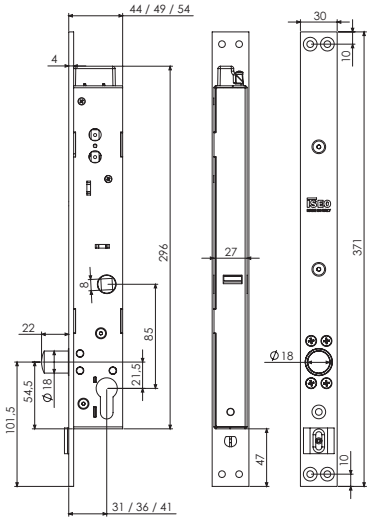


DROPBOLT FAIL SECURE WITHOUT HANDLE FOLLOWER.
Hardened steel bolt, Ø18 mm diameter, one throw, 22 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
No handle follower.
European profile cylinder hole.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws,
connector with rubber protection.

	Code	Single package		Multiple package	Min. ord.
Single door software. Backset 30 mm.	**07600023021**	1	-	1	
Single door software. Backset 35 mm.	**07600023521**	1	-	1	
Single door software. Backset 40 mm.	**07600024021**	1	-	1	
Manual interlock software. Backset 30 mm.	**0760M023021**	1	-	1	
Manual interlock software. Backset 35 mm.	**0760M023521**	1	-	1	
Manual interlock software. Backset 40 mm.	**0760M024021**	1	-	1	
Automatic interlock software. Backset 30 mm.	**0760A023021**	1	-	1	
Automatic interlock software. Backset 35 mm.	**0760A023521**	1	-	1	
Automatic interlock software. Backset 40 mm.	**0760A024021**	1	-	1	

Thesis 2.0 Professional



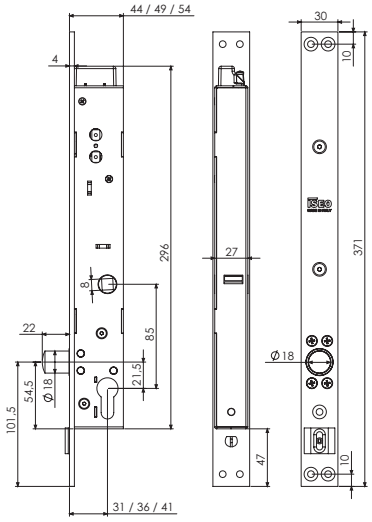

DROPBOLT FAIL SAFE WITHOUT HANDLE FOLLOWER.
Hardened steel bolt, Ø18 mm diameter, one throw, 22 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
No handle follower.
European profile cylinder hole.
Fail Safe mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection.

	Code	Single package		Multiple package	Min. ord.
Single door software. Backset 30 mm.	**07600023022**	1	-		1
Single door software. Backset 35 mm.	**07600023522**	1	-		1
Single door software. Backset 40 mm.	**07600024022**	1	-		1
Manual interlock software. Backset 30 mm.	**0760M023022**	1	-		1
Manual interlock software. Backset 35 mm.	**0760M023522**	1	-		1
Manual interlock software. Backset 40 mm.	**0760M024022**	1	-		1
Automatic interlock software. Backset 30 mm.	**0760A023022**	1	-		1
Automatic interlock software. Backset 35 mm.	**0760A023522**	1	-		1
Automatic interlock software. Backset 40 mm.	**0760A024022**	1	-		1

Thesis 2.0 Professional Mini

Thesis 2.0 Professional Mini has the same features as the Professional version but its case is smaller and it can't be operated through handle and cylinder. It is the ideal solution for installations where only the electric operation of the lock is required, eventually combined with other classic closing systems. A steel deadbolt with a 22 mm extension ensures a high anti-intrusion security, and the opening operation can be controlled by transponders, contactless cards and/or PIN codes. The range of Stylos credential readers and controllers dialog with Thesis 2.0 Professional Mini in a direct way through Lockbus interface, i.e. without intermediate electronic devices, creating flexible and effective electronic access control solutions.

Key points

The technology and materials chosen for THESIS 2.0 Professional Mini guarantee its durability, which is much longer than the standard requirements (even over 1 million operating cycles).

A hardened steel deadbolt with a 18 mm diameter, a 22 mm extension and a 4 mm stainless steel front plate ensure a high anti-intrusion security (level 7 according to EN12209 standard).

The operation is guaranteed even in case of a residual lateral load up to 15N and of a bad door alignment. This is why it is at the top of the market.

Innovative electronics with power reserve (booster) ensure an efficient deadbolt movement in difficult operating conditions: even with 8V only!

Power supply from 8 to 30 VDC 1A. Its operation is ensured also in complex installations and critical situations. Flexible installation conditions and low power consumption.

Thesis 2.0 Professional Mini guarantees a trouble-free operation even if installed horizontally. It represents the ideal solution for automatic sliding doors.

The Lockbus interface allows the direct connection with Iseo Stylos Line credential readers, for a simple but effective access control management.

Available both Fail Secure mode (N.C. Normally Closed) and Fail Safe mode (N.O. Normally Open) versions.

It can operate in interlock mode (manual or automatic) for double doors without any external control device.


ICIM

Certificazione di Prodotto
Product Certification

Certificato N. 005CI/1
Certificate No.

FIAM S.r.l.
Via Don Fasola, 4
22069 ROVELLASCA (CO) ITALY

ICIM S.p.A.

It is certified

Thesis 2.0 Professional Mini is conceived and manufactured in compliance with European standards EN 14846:08, with the following classification:

3	H	8	0	0	M	7	0/1	1	*

(*) 0 = in combination with STATUS INDICATOR
1 = in combination without STATUS INDICATOR

Thesis 2.0 Professional Mini



Technical features

Deadbolt:
- hardened steel;
- diameter Ø18 mm;
- single throw
- extension 22 mm.

Front plate:
- inox steel;
- 30x280 mm – thickness 4 mm;
- door positioning sensor and alignment device;

Striking plate:
- Inox steel;
- 30x280 mm – thickness 4 mm;
- adjustable depending on the distance between the lock and the striking plate;

Case dimensions:
- thickness 27 mm
- length 203 mm
- depth 44 mm

DC supply voltage range: 8÷30 Vdc.
Max. absorbed current power in operation: 1A.
CC power supply min. characteristics: 8÷30 Vdc 15W.

Opening control:
- opto-isolated input 8÷24 Vdc / 12 Vac;

Max voltage and current applicable to signalling relay:
- 24 Vdc 1A;
- 120 Vac 0.5A;

Programmable status signal:
- secured door status;
- door status;
- latchbolt status;
- command for motorized door opener;

Lockbus connection:
- data communication and power supply on the same 3 wire connections;
- maximum length 100 mt;
- secure devices authentification;
- encrypted data transmission for high security against hacking;

Adjustable timings:
- door opening time (courtesy time): 1÷180 sec. (15 sec. default);
- delayed closure time (at closing of the door): 1÷60 sec. (1 sec. default).

Thesis 2.0 Professional Mini

Environmental features:
- operating temperature: -20°C÷+60°C;
- storage temperature: -25°C÷+70°C;
- protection level (IP grading): IP44;

Reference Standard: EN 14846:2008;
grading: 3 H 8 0 0 M 7 0 1
3 H 8 0 0 M 7 1 1 (in combination with status indicator)

Options and versions:

Operating modes in case of power failure:
- Fail Secure mode (N.C. Normally Closed)
- Fail Safe mode (N.O. Normally Open)

Operating software:
single door;
bidirectional doors with manual interlock functionality (*);
bidirectional doors with automatic interlock functionality (*);

(*) direct connection between the 2 lock with encrypted communication.

Lockbus


LOCAL BUS


All devices belonging of the THESIS range are compatible with ISEO Lockbus.
Lockbus is a powerful multipoint bus sharing data transmission and power supply on the same 3-wire connection for utmost flexibility, easy installation and consequently, cost optimization.

Lockbus highlights:

Data transmission and power supply on the same 3-wire connection up to 100 m;
Self-adjusting power supply from 8Vdc to 30Vdc;
Secure device authentication (among readers and actuators) and encrypted data transmission for high security against manipulation.

Thesis 2.0 Professional Mini



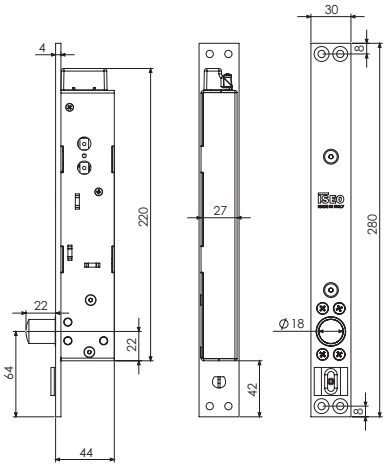


DROPBOLT FAIL SECURE WITHOUT HANDLE FOLLOWER.
Hardened steel bolt, Ø18 mm diameter,
one throw 22 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
Fail Secure mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection.

	Code	Single package	Multiple package	Min. ord.
Single door software.	**07800020021**	1	-	1
Manual interlock software.	**0780M020021**	1	-	1
Automatic interlock software.	**0780A020021**	1	-	1

Thesis 2.0 Professional Mini






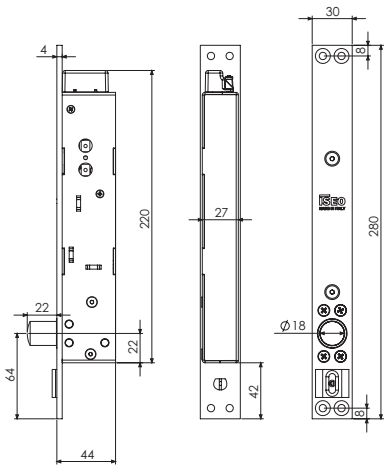


DROPBOLT FAIL SECURE WITHOUT HANDLE FOLLOWER.
Hardened steel bolt, Ø18 mm diameter,
one throw 22 mm excursion.
Stainless steel front plate with alignment device.
Stainless steel striking plate with alignment device and in line frame sensor.
Fail Safe mode.
Package: 1 dropbolt, 1 striking plate, instruction manual, screws, connector with rubber protection.

	Code	Single package	Multiple package	Min. ord.
Single door software.	**07800020022**	1	-	1
Manual interlock software.	**0780M020022**	1	-	1
Automatic interlock software.	**0780A020022**	1	-	1



Thesis 2.0 Accessories

	Code	Single package	Multiple package	Min. ord.
 STRIKING PLATE FOR THESIS 2.0 STANDARD AND STANDARD LATCHBOLT Inox steel 25x367 mm, thickness 3 mm. 2 fori di fissaggio ovali per una regolazione verticale di 4 mm e un foro fisso al centro per il fissaggio definitivo. Adjustable magnet. Adjustable positioning device. Package: 1 striking plate.	**0000098075000**	1	-	1
 STRIKING PLATE FOR THESIS 2.0 PROFESSIONAL Inox steel 30x371 mm, thickness 4 mm. Adjustable magnet. Adjustable positioning device. Package: 1 striking plate.	**0000098076000**	1	-	1
 STRIKING PLATE FOR THESIS 2.0 PROFESSIONAL MINI Inox steel 30x280 mm, thickness 4 mm. Adjustable magnet. Adjustable positioning device. Package: 1 striking plate.	**0000098078000**	1	-	1
 ELECTRICAL JUMPER. For special multidevice configurations. Package: 5 jumpers.	**5E00000205**	5	-	5
 RIM CARTER SET FOR THESIS 2.0 STANDARD AND STANDARD LATCHBOLT Symmetrical design. Steel painted black. Prearranged for locks with 35 mm backset. Prearranged with holes for the installation of a handle with 43 mm fixing centre distance and with max 34 mm oval escutcheon. Package: 1 carter set. Striking plate 0000098075000 and lock to be ordered separately				
RIGHT HAND	**0CA7500803501**	1	-	1
LEFT HAND	**0CA7500803502**	1	-	1


Thesis 2.0 Accessories

	Code	Single package	Multiple package	Min. ord.
 MORTICE STATUS INDICATOR FOR THESIS 2.0 With front-plate for mortice assembly. Green/red light + buzzer + multifunction button. 12 Vdc power supply, 70 mA. Anodized aluminium “silver” colour (250 x 50 mm), thickness 4 mm.	**FSAPL2T00000000**	1	-	1
 RIM STATUS INDICATOR FOR THESIS 2.0 Aluminium case for rim assembly. Green/red light + buzzer + multifunction button. 12 Vdc power supply, 70 mA. Anodized aluminium “silver” colour (35 x 25 x 215 mm).	**FSAPL2TA0000000**	1	-	1
 TOUCH CAPACITIVE BUTTON Backlight (red/green for non-authorized/authorized access signalling). Sound feedback. One relay 2A output. 12/24 Vac/Vdc power supply. It can be used as opening button. Programmable temporary impulse or bistable output. IP66 protection grade. Dimensions 92x51x25 mm	**50800IP54MTTS**	1	-	1
 METAL STAND ALONE KEYBOARD 99 users codes. IP65 protection grade. 12/24 Vac/Vdc power supply. One 2A relay output and one 250 mA transistor. Absorption: 20 mA at rest and 100 mA in operation. Internal and external assembly. Tamper protection. Metal buttons with backlight. Sound buzzer. 3-colour leds. Dimensions 92x51x25 mm.	**58700MTPADS00**	1	-	1


Thesis 2.0 Accessories


	Code	Single package	Multiple package	Min. ord.
 POWER SUPPLY UNIT 24Vdc - 30W Input 100-240Vac. Output 24Vdc 1.5A. DIN35 rail mounting. Package: 1 power supply unit, instruction manual.	**5E3506**	1	-	1
POWER SUPPLY UNIT 12Vdc - 70W Input 120-230Vac. Output 12Vdc 6A. DIN35 rail mounting. Package: 1 power supply unit, instruction manual.	**5E3509**	1	-	1
 CONCEALED LEAD COVER, flexible, external, L=300 	**94403010E**	1	-	1
CONCEALED LEAD COVER, flexible, external, L=450 	**FXAGFA45D900000**	5	-	5
 CONCELEAD LEAD COVER, flexible, flush version L=300 For openings up to 90°. Compatibile con Thesis, Top Exit DGT, x1R.	**00000881000000**	1	-	1

Thesis 2.0 Accessories



	Code	Single package	Multiple package	Min. ord.
Cable passage flexible, flush version L=68. For openings up to 180°.	**0000060130000**	1	-	1



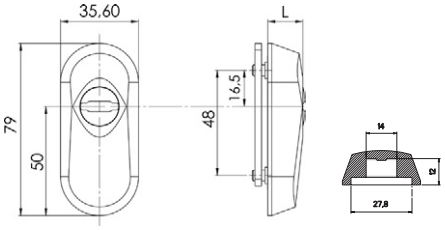

IRON. Escutcheon for European profile cylinder. Tempered steel.

For projecting cylinders 4 mm to 11,2 mm.				
Satin nickel plated - L = 16 mm	**98050204**	1	-	1
Black painted - L = 16 mm	**98050205**	1	-	1
Polished brass-plated - L = 16 mm	**98050206**	1	-	1
For projecting cylinders 4 mm to 7,4 mm.				
Satin nickel plated - L = 12 mm	**98050104**	1	-	1
Black painted - L = 12 mm	**98050105**	1	-	1
Polished brass-plated - L = 12 mm	**98050106**	1	-	1



Electa

ShutterTop

741N - 741A

Locks for glass doors

Locks for metal frames

Certifications


ACCREDIA
ICIM
Certificazione di Prodotto
Product Certification
Certificato N. / Certificate No. 042BE/2
ISEO SERRATURE S.p.A.
Via San Girolamo, 13
PISOGNE (BS) ITALY
SERRATURA INFILARE AD AZIONAMENTO MECCANICO
CON CILINDRO A PROFILO EUROPEO
MECHANICALLY OPERATED MORTICE LOCK WITH EUROPEAN CYLINDER
Serie: ELECTA
UNI EN 12209:04 - ICIM 0059CS
3 X 8 0 0 G 2 H A 2 0
ICIM S.p.A.
10/01/2010 | 15/01/2016 | 18/01/2019


ACCREDIA
ICIM
Certificazione di Prodotto
Product Certification
Certificato N. / Certificate No. 043BE/2
ISEO SERRATURE S.p.A.
Via San Girolamo, 13
PISOGNE (BS) ITALY
SERRATURA INFILARE AD AZIONAMENTO MECCANICO
CON CILINDRO A PROFILO EUROPEO
MECHANICALLY OPERATED MORTICE LOCK WITH EUROPEAN CYLINDER
Serie: ELECTA
UNI EN 12209:04 - ICIM 0059CS
3 C 8 0 0 G 2 H A 0 0
ICIM S.p.A.
18/01/2010 | 15/01/2016 | 18/01/2019


ACCREDIA
ICIM
Certificazione di Prodotto
Product Certification
Certificato N. / Certificate No. 044BE/2
ISEO SERRATURE S.p.A.
Via San Girolamo, 13
PISOGNE (BS) ITALY
SERRATURA INFILARE AD AZIONAMENTO MECCANICO
CON CILINDRO A PROFILO EUROPEO
MECHANICALLY OPERATED MORTICE LOCK WITH EUROPEAN CYLINDER
Serie: ELECTA
UNI EN 12209:05 - ICIM 0059CS
3 C 8 0 0 G 2 L A 0 0
ICIM S.p.A.
19/01/2010 | 15/01/2016 | 18/01/2019



ACCREDIA
ICIM
Certificazione di Prodotto
Product Certification
Certificato N. / Certificate No. 049BE/2
ISEO SERRATURE S.p.A.
Via San Girolamo, 13
PISOGNE (BS) ITALY
SERRATURA INFILARE AD AZIONAMENTO MECCANICO
CON CILINDRO A PROFILO EUROPEO
MECHANICALLY OPERATED MORTICE LOCK WITH EUROPEAN CYLINDER
AUTOMATICALLY LOCKING
Serie: ELECTA MULTIPUNTO
UNI EN 12209:2009 - ICIM 0059CS
3 X 8 A 0 G 2 0 1
ICIM S.p.A.
19/01/2010 | 15/01/2016 | 18/01/2019



ACCREDIA
ICIM
Certificazione di Prodotto
Product Certification
Certificato N. / Certificate No. 050BE/2
ISEO SERRATURE S.p.A.
Via San Girolamo, 13
PISOGNE (BS) ITALY
SERRATURA INFILARE AD AZIONAMENTO MECCANICO
CON CILINDRO A PROFILO EUROPEO CHIUSURA
MECHANICALLY OPERATED MORTICE LOCK WITH EUROPEAN CYLINDER
AUTOMATICALLY LOCKING
Serie: ELECTA MULTIPUNTO
UNI EN 12209:2009 - ICIM 0059CS
3 C 8 A 0 G 2 0 1
ICIM S.p.A.
19/01/2010 | 15/01/2016 | 18/01/2019


ACCREDIA
ICIM
Certificazione di Prodotto
Product Certification
Certificato N. / Certificate No. 0108BE/0
ISEO SERRATURE S.p.A.
Via San Girolamo, 13 - 25050 PISOGNE (BS) ITALY
SERRATURA MECCANICA AD INFILARE CON CILINDRO A PROFILO EUROPEO
MECHANICALLY OPERATED MORTICE LOCK WITH EUROPEAN CYLINDER
Serie / Series 741 - Modelli / Models 741***
UNI EN 12209:05, BS EN 12209 :03 - ICIM 79R029
3 M 8 0 0 G 1 P A 2 0
Serie / Series 743, 745 - Modelli / Models 743***, 745***
UNI EN 12209:05, BS EN 12209 :03 - ICIM 79R029
3 C 8 0 0 G 1 P A 0 0
Serie / Series 747 - Modelli / Models 747***
UNI EN 12209:05, BS EN 12209 :03 - ICIM 79R029
3 M 8 0 0 G 1 P C 2 0
ICIM S.p.A.
18/07/2014 | 18/07/2014 | 17/07/2017

Electa multipoint electric lock



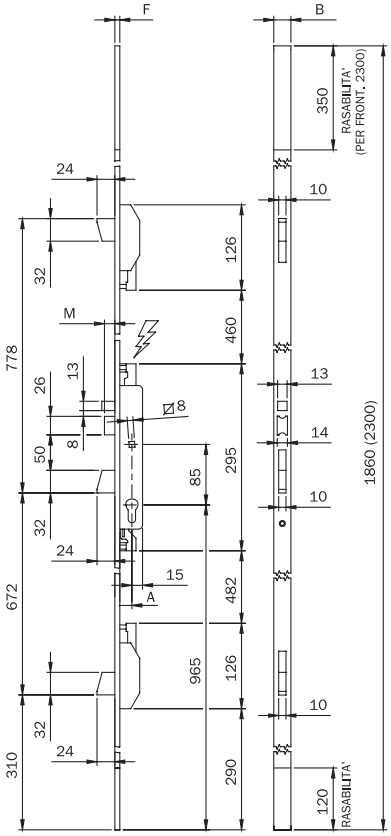


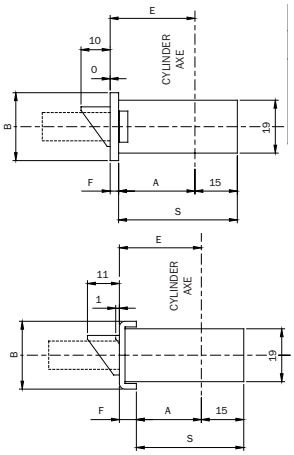


Code							
Art.		E		A	S	B	F
7858	11	25	2	22	37	24	3
		30		27	42		
		35		32	47		

Code							
Art.		E		A	S	B	F
7858	01	25	2	18	33	24	6
		30		23	38		
		35		28	43		

Multipoint electric mortice lock for metal frames with 3 LATERAL LOCKINGS, **12Vac/dc**, operating with European profile cylinder
CENTRAL ELECTRIC LOCK WITH ROTATING DEADBOLT and mm 24 throw.
SELF-LOCKING LATCHBOLT. Latchlocking by electric pulse, key or HANDLE FOLLOWER mm 8.
Separate loading spring. Adjustable on top and bottom.
2 deviators, with rotating deadbolt mm 24 throw.
2 nylon end blocks and two front plate supports for open joint for U-version.
2 cylinder escutcheons. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates



	Code	Code	Single package	Multiple package	Min. ord.
U-front plate **1860x24x6** in stainless steel. Backset mm 25	**785801252**	1	-	1
U-front plate **1860x24x6** in stainless steel. Backset mm 30	**785801302**	1	-	1
U-front plate **1860x24x6** in stainless steel. Backset mm 35	**785801352**	1	-	1





	Code	Code	Single package	Multiple package	Min. ord.
U-front plate **1860x24x3** in stainless steel. Backset mm 25	**785811252**	1	-	1
U-front plate **1860x24x3** in stainless steel. Backset mm 30	**785811302**	1	-	1
U-front plate **1860x24x3** in stainless steel. Backset mm 35	**785811352**	1	-	1

ISEO
ULTIMATE ACCESS TECHNOLOGIES


Electa multipoint electric lock



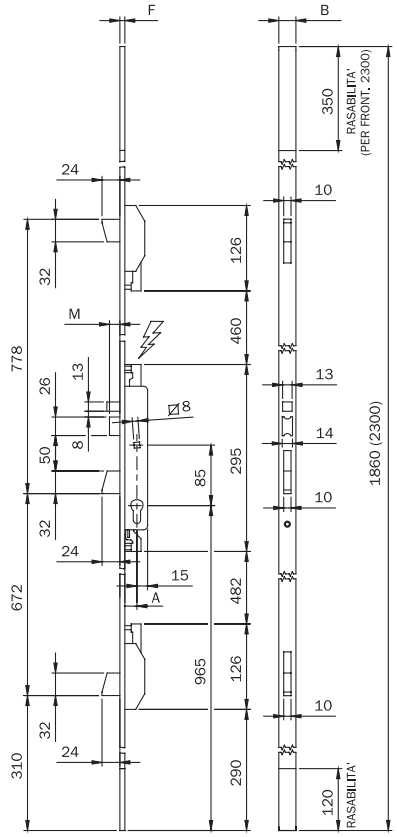




Code							
Art.		E		A	S	B	F
7858	11	25	2	22	37	24	3
		30		27	42		
		35		32	47		




Code							
Art.		E		A	S	B	F
7858	01	25	2	18	33	24	6
		30		23	38		
		35		28	43		

Multipoint electric mortice lock for metal frames with 3 LATERAL LOCKINGS, **12Vac/dc**, operating with European profile cylinder **CENTRAL ELECTRIC LOCK WITH ROTATING DEADBOLT** and mm 24 throw. **SELF-LOCKING LATCHBOLT**.
Latchlocking by electric pulse, key or HANDLE FOLLOWER mm 8.
Separate loading spring. Adjustable on top and bottom.
2 deviators, with rotating deadbolt mm 24 throw.
2 nylon end blocks and two front plate supports for open joint for U-version.
2 cylinder escutcheons. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates



		Code	Single package	Multiple package	Min. ord.
Flat front plate **2300x24x6** in stainless steel. Backset mm 25		**785800250**	1	-	1
Flat front plate **2300x24x6** in stainless steel. Backset mm 30		**785800300**	1	-	1
Flat front plate **2300x24x6** in stainless steel. Backset mm 35		**785800350**	1	-	1



		Code	Single package	Multiple package	Min. ord.
Flat front plate **2300x24x3** in stainless steel. Backset mm 25		**785810250**	1	-	1
Flat front plate **2300x24x3** in stainless steel. Backset mm 30		**785810300**	1	-	1
Flat front plate **2300x24x3** in stainless steel. Backset mm 35		**785810350**	1	-	1

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Code


Single package


Multiple package

Min. ord.

Electa multipoint



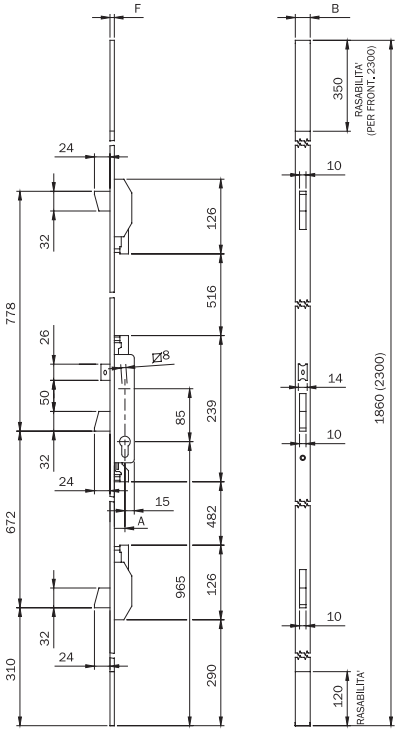


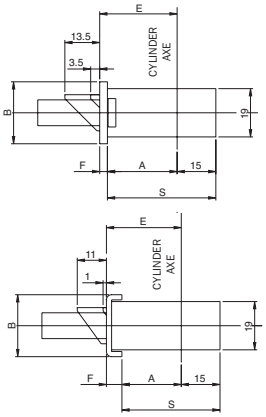

Code							
Art.		E		A	S	B	F
78**	11	25	2	22	37	24	3
		30		27	42		
		35		32	47		

Code							
Art.		E		A	S	B	F
78**	01	25	2	18	33	24	6
		30		23	38		
		35		28	43		

Multipoint mortice lock for metal frames with 3 LATERAL LOCKINGS, operating with European profile cylinder
CENTRAL LOCK with rotating deadbolt mm 24 throw. Latchlocking by key or HANDLE FOLLOWER mm 8.
2 deviators, with rotating deadbolt mm 24 throw. Adjustable on top and bottom.
2 nylon end blocks and two front plate supports for open joint for U-version.
2 cylinder escutcheons. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates



REVERSIBLE AND ADJUSTABLE LATCHBOLT

U-front plate **1860x24x6** in stainless steel. Backset mm 25	**785101252**	1	-	1
U-front plate **1860x24x6** in stainless steel. Backset mm 30	**785101302**	1	-	1
U-front plate **1860x24x6** in stainless steel. Backset mm 35	**785101352**	1	-	1

ADJUSTABLE ROLLER


U-front plate **1860x24x6** in stainless steel. Backset mm 25	**785201252**	1	-	1
U-front plate **1860x24x6** in stainless steel. Backset mm 30	**785201302**	1	-	1
U-front plate **1860x24x6** in stainless steel. Backset mm 35	**785201352**	1	-	1


ISEO
ULTIMATE ACCESS TECHNOLOGIES

Code | Single package | Multiple package | Min. ord.


Electa multipoint



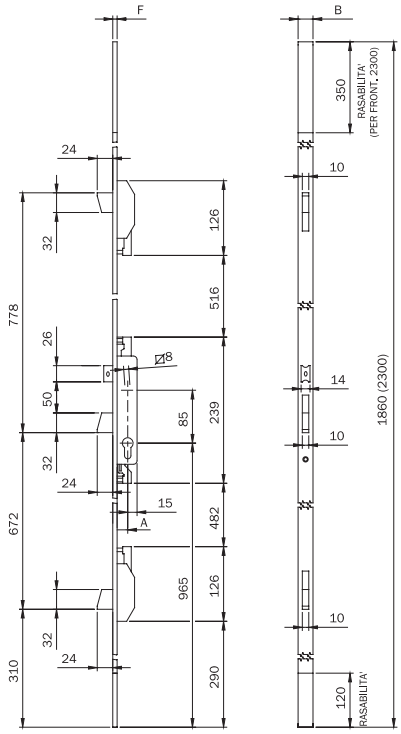




Code							
Art.		E		A	S	B	F
78**	11	25	2	22	37	24	3
		30		27	42		
		35		32	47		



Code							
Art.		E		A	S	B	F
78**	01	25	2	18	33	24	6
		30		23	38		
		35		28	43		

Multipoint mortice lock for metal frames with 3 LATERAL LOCKINGS, operating with European profile cylinder
CENTRAL LOCK with rotating deadbolt mm 24 throw. Latchlocking by key or HANDLE FOLLOWER mm 8.
2 deviators, with rotating deadbolt mm 24 throw. Adjustable on top and bottom.
2 nylon end blocks and two front plate supports for open joint for U-version.
2 cylinder escutcheons. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates



REVERSIBLE AND ADJUSTABLE LATCHBOLT

Flat front plate **1860x24x3** in stainless steel. Backset mm 25	**785111252**	1	-	1
Flat front plate **1860x24x3** in stainless steel. Backset mm 30	**785111302**	1	-	1
Flat front plate **1860x24x3** in stainless steel. Backset mm 35	**785111352**	1	-	1


ADJUSTABLE ROLLER


Flat front plate **1860x24x3** in stainless steel. Backset mm 25	**785211252**	1	-	1
Flat front plate **1860x24x3** in stainless steel. Backset mm 30	**785211302**	1	-	1
Flat front plate **1860x24x3** in stainless steel. Backset mm 35	**785211352**	1	-	1

Code | Single package | Multiple package | Min. ord.


Electa multipoint lock



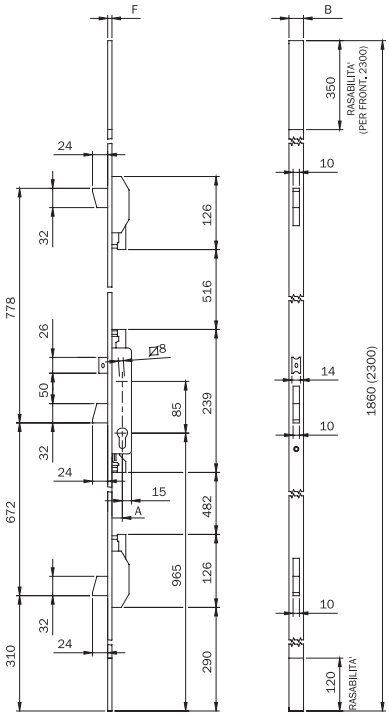




Code							
Art.		E		A	S	BF	
78**	11	25	23	22	7	24	3
		30		27	42		
		35		32	47		



Code							
Art.		EA			S	BF	
78**	01	25	2	18	33	24	6
		30		23	38		
		35		28	43		

Multipoint mortice lock for metal frames with 3 LATERAL LOCKINGS, operating with European profile cylinder
CENTRAL LOCK with rotating deadbolt mm 24 throw. Latchlocking by key or HANDLE FOLLOWER mm 8.
2 deviators, with rotating deadbolt mm 24 throw. Adjustable on top and bottom.
2 nylon end blocks and two front plate supports for open joint for U-version.
2 cylinder escutcheons. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates



REVERSIBLE AND ADJUSTABLE LATCHBOLT

U-front plate **2300x24x6** in black painted steel. Backset mm 25	**785100250**	1	-	1
U-front plate **2300x24x6** in black painted steel. Backset mm 30	**785100300**	1	-	1
U-front plate **2300x24x6** in black painted steel. Backset mm 35	**785100350**	1	-	1

ADJUSTABLE ROLLER


U-front plate **2300x24x6** in black painted steel. Backset mm 25	**785200250**	1	-	1
U-front plate **2300x24x6** in black painted steel. Backset mm 30	**785200300**	1	-	1
U-front plate **2300x24x6** in black painted steel. Backset mm 35	**785200350**	1	-	1


DEADBOLT ONLY

U-front plate **2300x24x6** in black painted steel. Backset mm 25	**785300250**	1	-	1
U-front plate **2300x24x6** in black painted steel. Backset mm 30	**785300300**	1	-	1
U-front plate **2300x24x6** in black painted steel. Backset mm 35	**785300350**	1	-	1


Electa multipoint lock



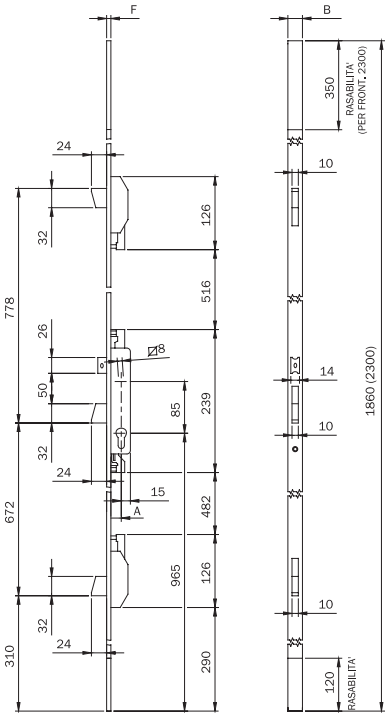




Code							
Art.		E		A	S	B	F
78**	11	25	2	22	37	24	3
		30		27	42		
		35		32	47		



Code							
Art.		E		A	S	B	F
78**	01	25	2	18	33	24	6
		30		23	38		
		35		28	43		


Multipoint mortice lock for metal frames with 3 LATERAL LOCKINGS, operating with European profile cylinder
CENTRAL LOCK with rotating deadbolt mm 24 throw. Latchlocking by key or HANDLE FOLLOWER mm 8.
2 deviators, with rotating deadbolt mm 24 throw. Adjustable on top and bottom.
2 nylon end blocks and two front plate supports for open joint for U-version.
2 cylinder escutcheons. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates




	Code	Single package		Multiple package	Min. ord.
REVERSIBLE AND ADJUSTABLE LATCHBOLT					
Flat front plate **2300x24x3** in black painted steel. Backset mm 25	**785110250**	1	-	1	
Flat front plate **2300x24x3** in black painted steel. Backset mm 30	**785110300**	1	-	1	
Flat front plate **2300x24x3** in black painted steel. Backset mm 35	**785110350**	1	-	1	
ADJUSTABLE ROLLER					
Flat front plate **2300x24x3** in black painted steel. Backset mm 25	**785210250**	1	-	1	
Flat front plate **2300x24x3** in black painted steel. Backset mm 30	**785210300**	1	-	1	
Flat front plate **2300x24x3** in black painted steel. Backset mm 35	**785210350**	1	-	1	
DEADBOLT ONLY					
Flat front plate **2300x24x3** in black painted steel. Backset mm 25	**785310250**	1	-	1	
Flat front plate **2300x24x3** in black painted steel. Backset mm 30	**785310300**	1	-	1	
Flat front plate **2300x24x3** in black painted steel. Backset mm 35	**785310350**	1	-	1	

Electa multipoint lock



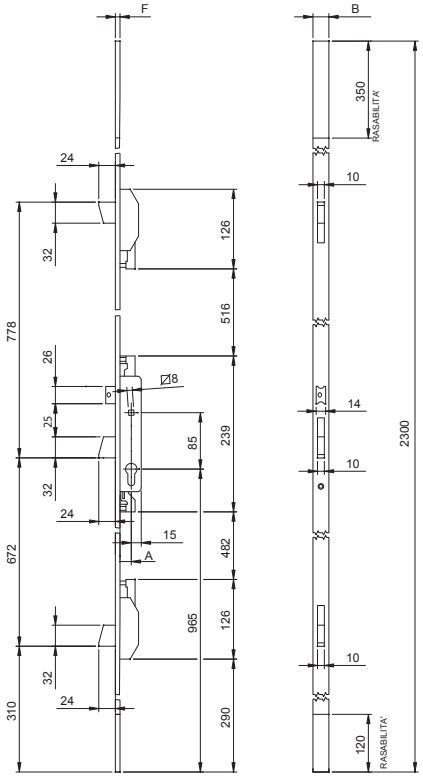




Code							
Art.		E		A	S	B	F
78**	30	25	*	19	34	24	5
		30		24	39		
		35		29	44		

Multipoint mortice lock for metal frames with 3 LATERAL LOCKINGS, operating with European profile cylinder **CENTRAL LOCK** with rotating deadbolt mm 24.
Latchlocking by key or handle follower mm 8. Adjustable on top and bottom.
2 deviators, with rotating deadbolt mm 24 throw. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.






Code | Single package | Multiple package | Min. ord.

REVERSIBLE AND ADJUSTABLE LATCHBOLT

U-front plate **2300x24x5** in stainless steel. Backset mm 25	**785130252**	1	-	1
U-front plate **2300x24x5** in stainless steel. Backset mm 30	**785130302**	1	-	1
U-front plate **2300x24x5** in stainless steel. Backset mm 35	**785130352**	1	-	1

ADJUSTABLE ROLLER

U-front plate **2300x24x5** in stainless steel. Backset mm 25	**785230252**	1	-	1
U-front plate **2300x24x5** in stainless steel. Backset mm 30	**785230302**	1	-	1
U-front plate **2300x24x5** in stainless steel. Backset mm 35	**785230352**	1	-	1




REVERSIBLE AND ADJUSTABLE LATCHBOLT

Flat front plate **2300x24x3** in stainless steel. Backset mm 25	**785110252**	1	-	1
Flat front plate **2300x24x3** in stainless steel. Backset mm 30	**785110302**	1	-	1
Flat front plate **2300x24x3** in stainless steel. Backset mm 35	**785110352**	1	-	1

Electa electric lock
stainless steel front plate mm 22



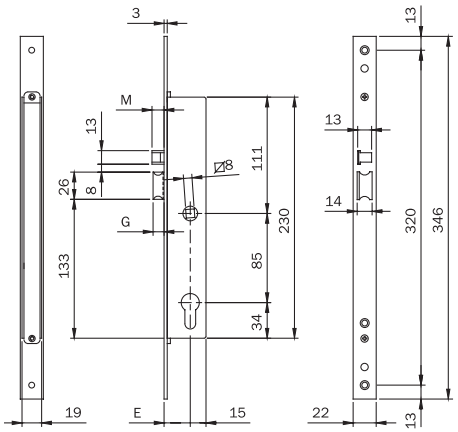

Code					
Art.		E		G	M
7817	02	25 30 35	2	10	12
7817	02	25 30 35	25	15	17

Electric mortice lock for metal frames, LATERAL LOCKING, **12Vac/dc**, operating with European profile cylinder.
Front plate mm **346x22x3** in STAINLESS STEEL. **SELF-LOCKING LATCHBOLT ONLY**. Latchlocking by electric pulse, key or handle follower mm 8. Separate loading spring.
2 escutcheons. Pair of front plate spacers.
Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781702252**	1	10	10
Backset mm 30	**781702302**	1	10	10
Backset mm 35	**781702352**	1	10	10


Electric mortice lock for metal frames, lateral locking, **12Vac/dc**, operating with European profile cylinder.
Front plate mm **346x22x3** in STAINLESS STEEL. **SELF-LOCKING AND mm 5 extended latchbolt only.**
Latchlocking by electric pulse, key or handle follower mm 8. Separate mm 5 extended loading spring.
2 escutcheons. Pair of front plate spacers. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**7817022525**	1	10	10
Backset mm 30	**7817023025**	1	10	10
Backset mm 35	**7817023525**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa electric lock
stainless steel front plate mm 22



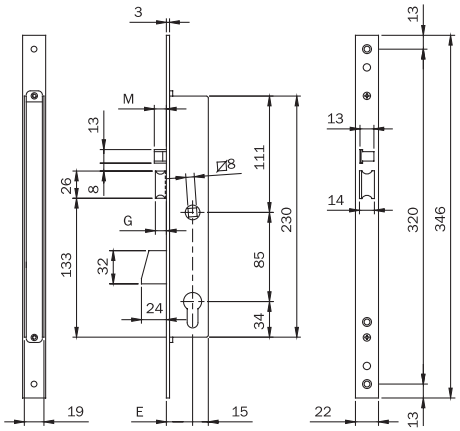

Code					
Art.		E		G	M
7818	02	25 30 35	2	10	12
7818	02	25 30 35	25	15	17

Electric mortice lock for metal frames, LATERAL LOCKING, **12Vac/dc**, operating with European profile cylinder.
Front plate mm **346x22x3** in STAINLESS STEEL. Rotating DEADBOLT 24 mm throw.
SELF-LOCKING LATCHBOLT only. Latchlocking by electric pulse,
key or handle follower mm 8. Separate loading spring.
2 escutcheons. Pair of front plate spacers. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates

Backset mm 25	**781802252**	1	10	10
Backset mm 30	**781802302**	1	10	10
Backset mm 35	**781802352**	1	10	10


Electric mortice lock for metal frames, LATERAL LOCKING, **12Vac/dc**, operating with European profile cylinder
Front plate mm **346x22x3** in STAINLESS STEEL. Rotating DEADBOLT 24 mm throw.
SELF-LOCKING LATCHBOLT, EXTENDED + mm 5. Latchlocking by electric pulse,
key or handle follower mm 8. Separate loading spring extended + mm 5.
2 escutcheons. Pair of front plate spacers.
Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates


Backset mm 25	**7818022525**	1	10	10
Backset mm 30	**7818023025**	1	10	10
Backset mm 35	**7818023525**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa electric lock
stainless steel front plate mm 22



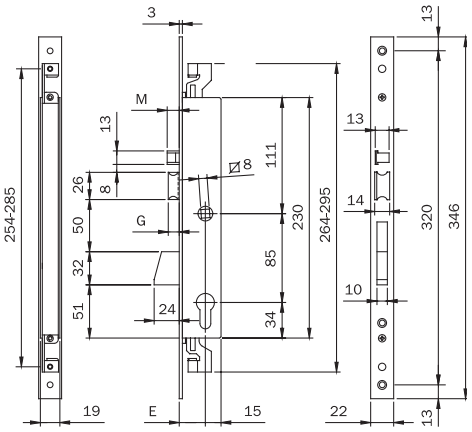



Code					
Art.		E		G	M
7838	02	25 30 35	2	10	12
7838	02	25 30 35	25	15	17

Electric mortice lock for metal frames, 3-POINT LOCKING, **12Vac/dc**, operating with European profile cylinder
Rods screwed connection. Front plate mm **346x22x3** in STAINLESS STEEL. Rotating DEADBOLT with 24 mm throw.
SELF-LOCKING LATCHBOLT. Latchlocking by electric pulse, key or handle follower mm 8.
Separate loading spring. 2 escutcheons. Pair of front plate spacers. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783802252**	1	10	10
Backset mm 30	**783802302**	1	10	10
Backset mm 35	**783802352**	1	10	10


Electric mortice lock for metal frames, 3-POINT LOCKING, **12Vac/dc**, operating with European profile cylinder.
Rods screwed connection. Front plate mm **346x22x3** in STAINLESS STEEL. Rotating DEADBOLT with 24 mm throw.
Self-locking latchbolt. **SELF-LOCKING LATCHBOLT EXTENDED + mm 5.**
Latchlocking by electric pulse, key or handle follower mm 8.
Separate loading spring extended + mm 5. 2 escutcheons.
Pair of Front plate spacers. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**7838022525**	1	10	10
Backset mm 30	**7838023025**	1	10	10

Code	Single package	Multiple package	Min. ord.

Electa stainless steel front plate mm 22




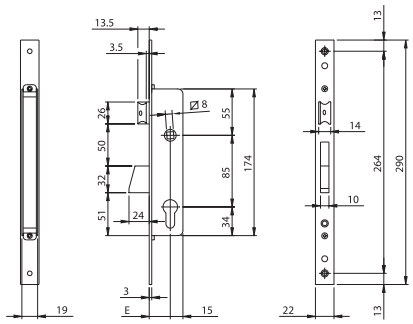

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate **290x22x3** in STAINLESS STEEL. Rotating **DEADBOLT** with mm 24 throw.
Separate reversible and adjustable **LATCHBOLT** 10 to 15 mm.
Latchlocking by key or handle follower mm 8.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates

Backset mm 25	**781102252**	1	10	10
Backset mm 30	**781102302**	1	10	10
Backset mm 35	**781102352**	1	10	10



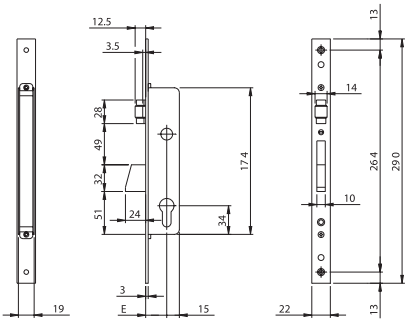

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate **290x22x3** in STAINLESS STEEL. Rotating **DEADBOLT** with mm 24 throw.
ADJUSTABLE ROLLER. 2 escutcheons.
Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates


Backset mm 25	**781202252**	1	10	10
Backset mm 30	**781202302**	1	10	10
Backset mm 35	**781202352**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Code	Single package	Multiple package	Min. ord.

Electa stainless steel front plate mm 22




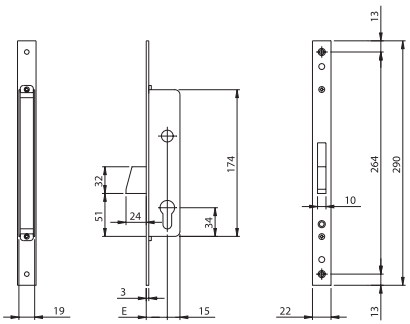

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate **290x22x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.

Backset mm 25	**781302252**	1	10	10
Backset mm 30	**781302302**	1	10	10
Backset mm 35	**781302352**	1	10	10



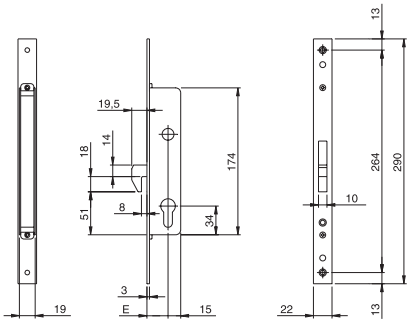

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate **290x22x3** in STAINLESS STEEL. **HOOK DEADBOLT**, **CLEARANCE 8**, with mm 18 throw.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.


Backset mm 25	**781402252**	1	10	10
Backset mm 30	**781402302**	1	10	10
Backset mm 35	**781402352**	1	10	10


ISEO
ULTIMATE ACCESS TECHNOLOGIES

Code | Single package | Multiple package | Min. ord.

Electa stainless steel front plate mm 22



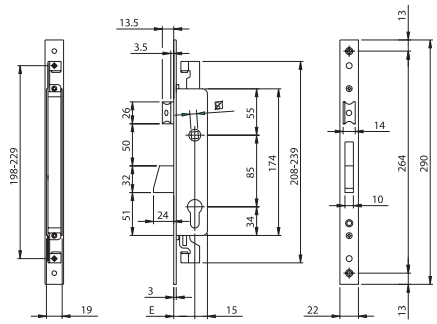







Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder. Rods screwed connection.
Front plate mm **290x22x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw.
Separate **REVERSIBLE AND ADJUSTABLE LATCHBOLT** 10 to 15 mm
Latchlocking by key or handle follower mm 8.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851

Backset mm 25	**783102252**	1	10	10
Backset mm 30	**783102302**	1	10	10
Backset mm 35	**783102352**	1	10	10



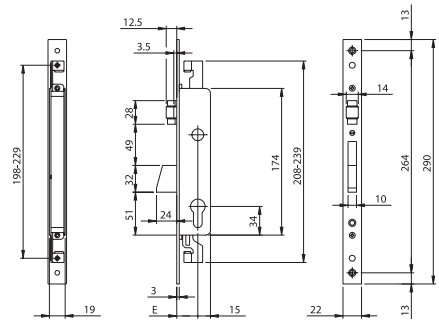





Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder. Rods screwed connection.
Front plate mm **290x22x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw. **ADJUSTABLE ROLLER**.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851
Paire de barres intérieures droites et accessoires - Réf. 990851

Backset mm 25	**783202252**	1	10	10
Backset mm 30	**783202302**	1	10	10
Backset mm 35	**783202352**	1	10	10


ISEO
ULTIMATE ACCESS TECHNOLOGIES


Code	Single package	Multiple package	Min. ord.

Electa stainless steel front plate mm 22





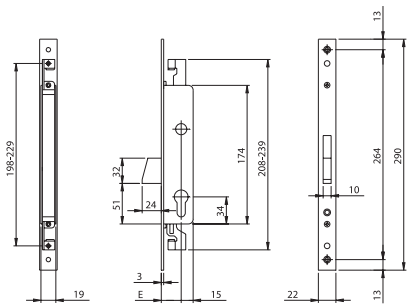





Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder. Rods screwed connection.
Front plate mm **290x22x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851

Backset mm 25	**783302252**	1	10	10
Backset mm 30	**783302302**	1	10	10
Backset mm 35	**783302352**	1	10	10





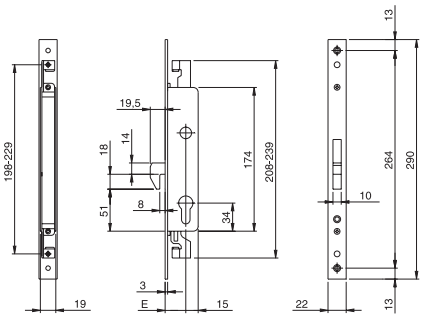




Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder. Rods screwed connection.
Front plate mm **290x22x3** in STAINLESS STEEL. **HOOK DEADBOLT**, **CLEARANCE 8**, with mm 18 throw.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851

Backset mm 25	**783402252**	1	10	10
Backset mm 30	**783402302**	1	10	10
Backset mm 35	**783402352**	1	10	10

Electa stainless steel front plate mm 22







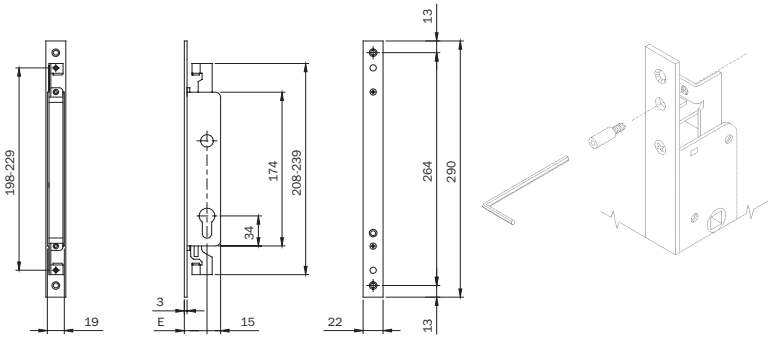

Mortice lock for metal frames, **DOUBLE TOP/BOTTOM LOCKING**, operating with European profile cylinder.
Rods screwed connection. Front plate mm **290x22x3** in STAINLESS STEEL. 2 escutcheons.
Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates
Pair of plates used to connect the lock to the external rods - ref. 990853
Deviators for external rods 3-point lateral locking - ref. 780322252
Deviators for internal rods 3-point lateral locking - ref. 780302252
Pair of deviated internal rods and accessories - ref. 990850
Pair of straight internal rods and accessories - ref. 990851

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**782002252**	1	10	10
Backset mm 30	**782002302**	1	10	10
Backset mm 35	**782002352**	1	10	10

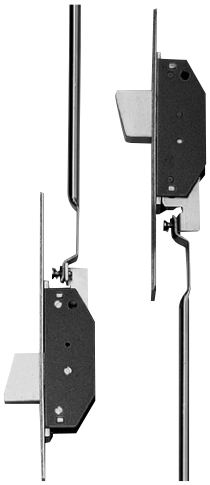


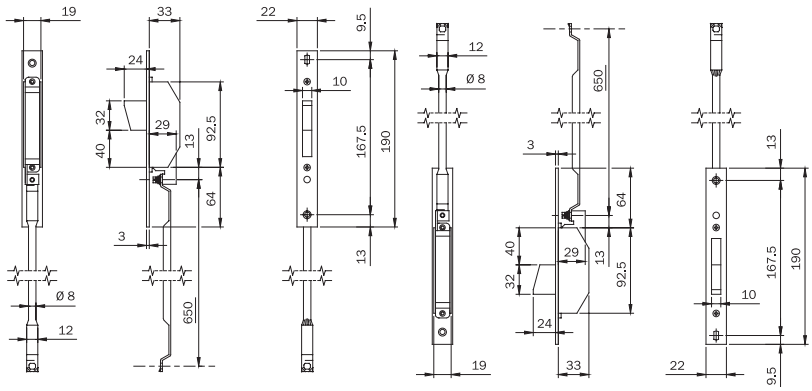


Deviators for 3-POINT LATERAL LOCKING. Internal rods to be used with locks with **SCREWED CONNECTION**.
Front plate mm **190x22x3** in STAINLESS STEEL.
Rotating deadbolt with mm 24 throw.
With internal rods. 2 pairs of nylon spacers.
Rod-guiding nylon bushes. Fixing screws

	Code	Single package	Multiple package	Min. ord.
	780302252	1	5	5

Electa stainless steel front plate mm 22

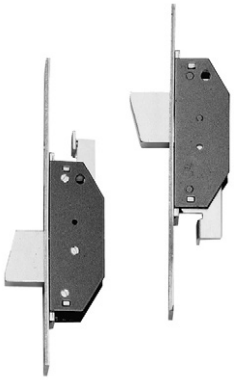


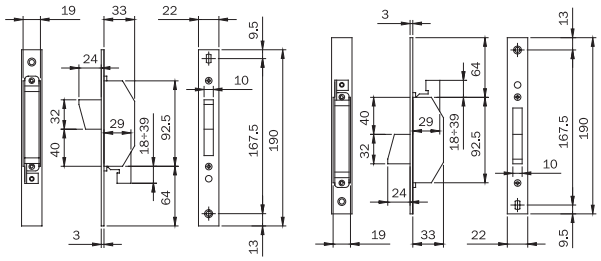

	Code	Single package	Multiple package	Min. ord.
Deviators for 3-POINT LATERAL LOCKING. For assembly with external rods to be used with locks **SCREWED CONNECTION**. Front plate mm **190x22x3** in STAINLESS STEEL. Rotating deadbolt with mm 24 throw. Without internal rods. 2 pairs of nylon spacers. Fixing screws.	**780322252**	1	5	5

Electa stainless steel front plate mm 24




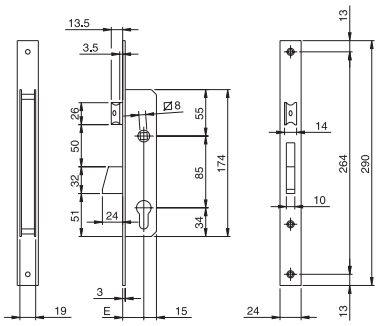

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290x24x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw.
Separate **REVERSIBLE AND ADJUSTABLE LATCHBOLT** 10 to 15 mm
Latchlocking by key or handle follower mm 8.
2 escutcheons. Nylon front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781251B**	1	10	10
Backset mm 30	**781301B**	1	10	10
Backset mm 35	**781351B**	1	10	10



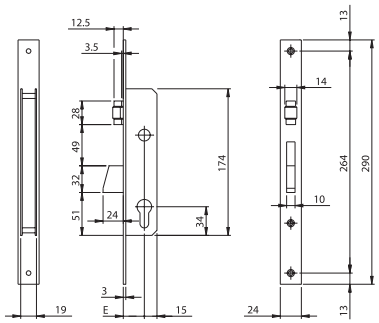


Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290x24x3** in STAINLESS STEEL.
Rotating **DEADBOLT** with mm 24 throw. Adjustable roller
2 escutcheons. Nylon front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781252B**	1	10	10
Backset mm 30	**781302B**	1	10	10
Backset mm 35	**781352B**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa stainless steel front plate mm 24



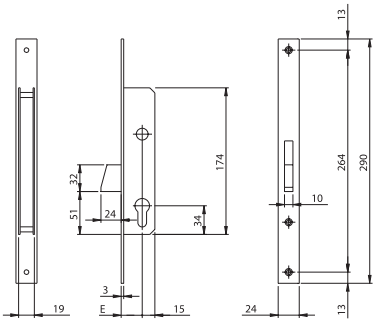


Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290x24x3** in STAINLESS STEEL.
ROTATING DEADBOLT with mm 24 throw.
2 escutcheons. Nylon front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates



	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781253B**	1	10	10
Backset mm 30	**781303B**	1	10	10
Backset mm 35	**781353B**	1	10	10



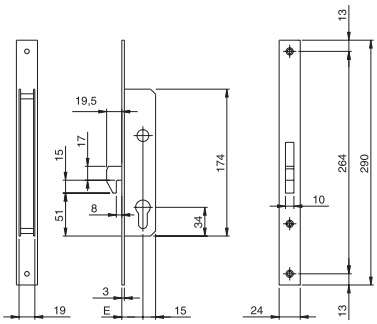

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm 290X24X3 in STAINLESS STEEL.
HOOK DEADBOLT, **CLEARANCE 8**, with mm 18 throw.
2 escutcheons. Nylon front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates




	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781254B**	1	10	10
Backset mm 30	**781304B**	1	10	10
Backset mm 35	**781354B**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa stainless steel front plate mm 24




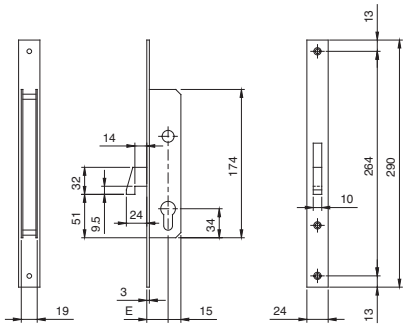

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290x24x3** in STAINLESS STEEL.
HOOK DEADBOLT, CLEARANCE 14, with mm 24 throw.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781470250**	1	10	10
Backset mm 30	**781470300**	1	10	10
Backset mm 35	**781470350**	1	10	10



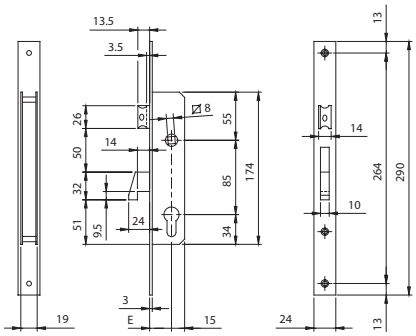


Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290X24X3** in STAINLESS STEEL.
HOOK DEADBOLT, CLEARANCE 14, with mm 24 throw.
Separate **LATCHBOLT FLUSH WITH FRONT PLATE**, **REVERSIBLE AND ADJUSTABLE** 10 to 15 mm.
Latchlocking by key or handle follower mm 8.
2 escutcheons. Pair of front plate supports. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates


	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**781570250**	1	10	10
Backset mm 30	**781570300**	1	10	10
Backset mm 35	**781570350**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa stainless steel front plate mm 24



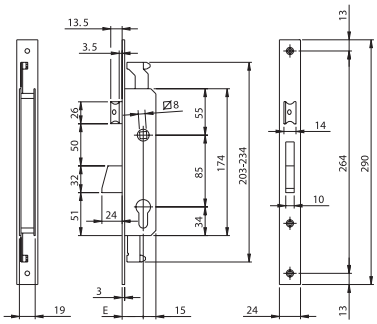





Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Rods clutch connection. Front plate mm **290x24x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw.
Separate **REVERSIBLE AND ADJUSTABLE LATCHBOLT** 10 to 15 mm
Latchlocking by key or handle follower mm 8.
2 escutcheons. Nylon front plate support. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783251B**	1	10	10
Backset mm 30	**783301B**	1	10	10
Backset mm 35	**783351B**	1	10	10



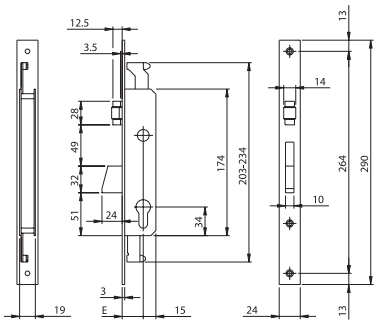



Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Rods clutch connection. Front plate mm **290x24x3** in STAINLESS STEEL.
Rotating DEADBOLT with mm 24 throw.
ADJUSTABLE ROLLER. 2 escutcheons. Nylon front plate support. Fixing screws. Instruction sheet.
Accessories to be ordered separately: Striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783252B**	1	10	10
Backset mm 30	**783302B**	1	10	10
Backset mm 35	**783352B**	1	10	10


ISEO
ULTIMATE ACCESS TECHNOLOGIES


ICIM CERTIFIED PRODUCT

Code | Single package | Multiple package | Min. ord.

Electa stainless steel front plate mm 24



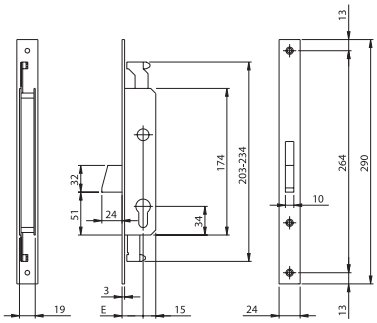





Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Rods clutch connection. Front plate mm **290X24X3** in STAINLESS STEEL.
Rotating DEADBOLT with mm 24 throw.
2 escutcheons. Nylon front plate support. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811

Backset mm 25	**783253B**	1	10	10
Backset mm 30	**783303B**	1	10	10
Backset mm 35	**783353B**	1	10	10



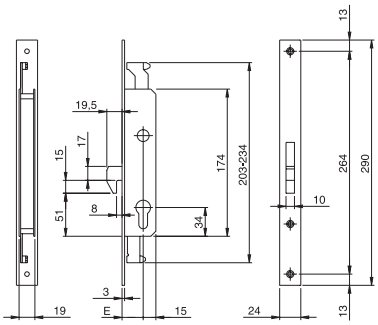




Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Rods clutch connection.Front plate mm **290x24x3** in STAINLESS STEEL.
HOOK DEADBOLT, CLEARANCE 8, with mm 18 throw.
2 escutcheons. Nylon front plate support. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates.
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811

Backset mm 25	**783254B**	1	10	10
Backset mm 30	**783304B**	1	10	10
Backset mm 35	**783354B**	1	10	10


Electa stainless steel front plate mm 24




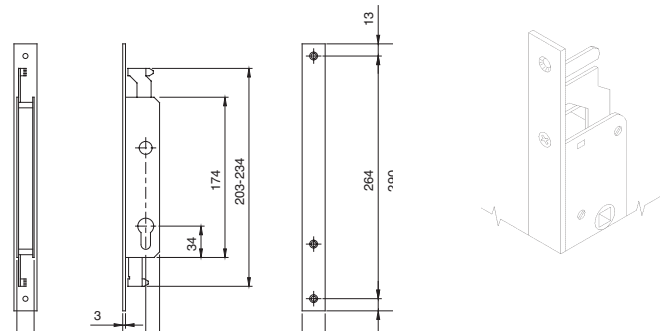

Mortice lock for metal frames, DOUBLE **TOP/BOTTOM** LOCKING, operating with European profile cylinder.
Rods clutch connection. Front plate mm **290x24x3** in STAINLESS STEEL.
2 escutcheons. Nylon front plate support. Fixing screws. Instruction sheet.
Accessories to be ordered separately: striking plates
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811

Code	Single package	Multiple package	Min. ord.
Backset mm 25 **782250B**	1	10	10
Backset mm 30 **782300B**	1	10	10
Backset mm 35 **782350B**	1	10	10

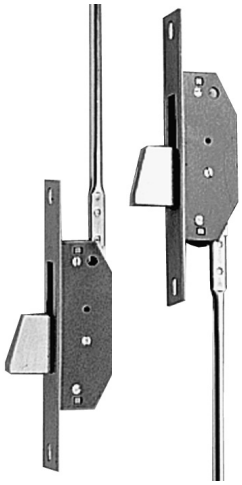

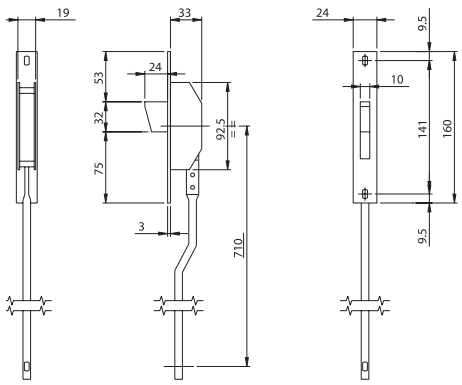


Deviators for 3-POINT LATERAL LOCKING.
Internal rods to be used with locks with **CLUTCH CONNECTION**.
Front plate mm **160x24x3** in STAINLESS STEEL.
Rotating latchbolt with mm 24 throw.
With rods. Rod-guiding pins. Screws with roses. Instruction sheet. **780253** 1 5 5

ISEO
ULTIMATE ACCESS TECHNOLOGIES

	Code	Single package	Multiple package	Min. ord.

Electa zinc-plated steel front plate mm 24




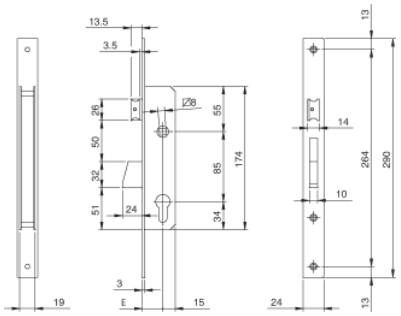

Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290x24x3** in zinc-plated steel. Rotating DEADBOLT with 24 mm throw. Separate **REVERSIBLE AND ADJUSTABLE LATCHBOLT** 10 to 15 mm.
Latchlocking by key or handle follower mm 8.
2 escutcheons. Cylinder fixing screw.
Accessories to be ordered separately: Striking plates

Backset mm 25	**781251IFZ**	1	10	10
Backset mm 30	**781301IFZ**	1	10	10
Backset mm 35	**781351IFZ**	1	10	10



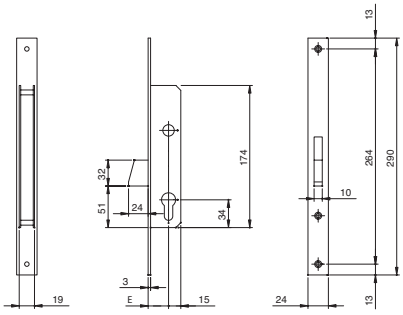



Mortice lock for metal frames, LATERAL LOCKING, operating with European profile cylinder.
Front plate mm **290x24x3** in ZINC-PLATED STEEL.
Rotating DEADBOLT with 24 mm throw.
2 escutcheons. Cylinder fixing screw.
Accessories to be ordered separately: Striking plates

Backset mm 25	**781253IFZ**	1	10	10
Backset mm 30	**781303IFZ**	1	10	10
Backset mm 35	**781353IFZ**	1	10	10

Electa zinc-plated steel front plate mm 24



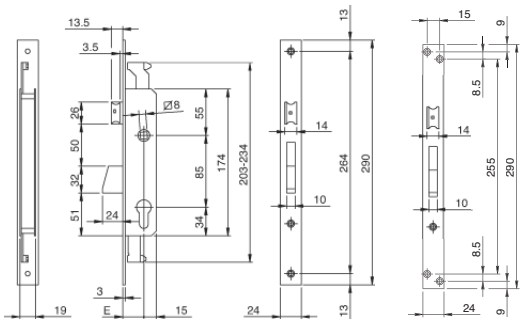


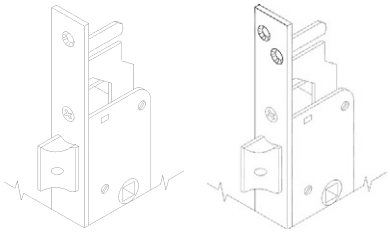




Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Rods clutch connection. Front plate mm **290x24x3** in ZINC-PLATED STEEL. Rotating DEADBOLT with mm 24 throw.
Separate **REVERSIBLE AND ADJUSTABLE LATCHBOLT** 10 to 15 mm. Deadlocking by key or handle follower mm 8.
2 escutcheons. Cylinder fixing screw.

Accessories to be ordered separately: striking plates
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811
M8 screwed connection for threaded rods - ref. 990823
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837




	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783251IFZ**	1	10	10
Backset mm 30	**783301IFZ**	1	10	10
Backset mm 35	**783351IFZ**	1	10	10




	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783251IZ4**	1	10	10
Backset mm 30	**783301IZ4**	1	10	10
Backset mm 35	**783351IZ4**	1	10	10

Electa zinc-plated steel front plate mm 24




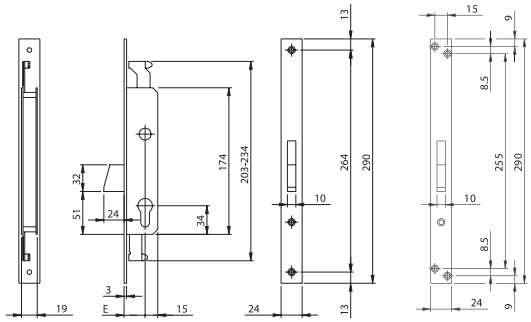

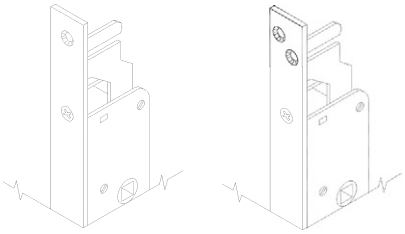





Mortice lock for metal frames, 3-POINT LOCKING, operating with European profile cylinder.
Rods clutch connection. Front plate mm **290x24x3** in ZINC-PLATED STEEL.
Rotating DEADBOLT with mm 24 throw. 2 escutcheons. Cylinder fixing screw.
Accessories to be ordered separately: striking plates
Pair of plates used to connect the lock to the external rods - ref. 990828
Deviators for lateral 3-point locking, internal rods - ref. 780253BFZ
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811
M8 screwed connection for threaded rods - ref. 990823
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837




	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783253IFZ**	1	10	10
Backset mm 30	**783303IFZ**	1	10	10
Backset mm 35	**783353IFZ**	1	10	10



	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783253IZ4**	1	10	10
Backset mm 30	**783303IZ4**	1	10	10
Backset mm 35	**783353IZ4**	1	10	10

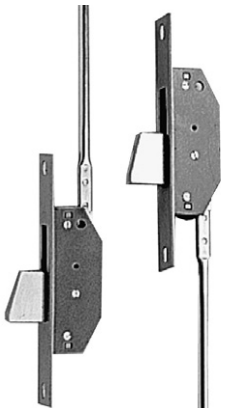


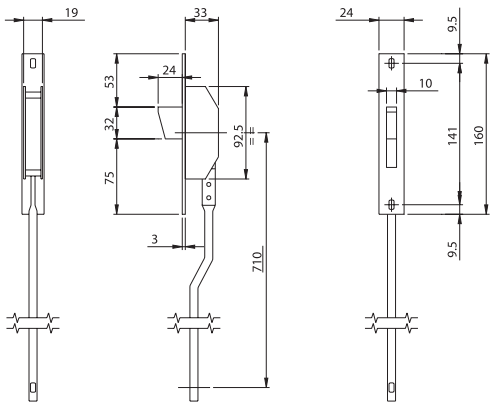

Deviators for 3-point lateral locking. Internal rods to be used with locks with clutch connection.
Front plate mm **160x24x3** in ZINC-PLATED STEEL. Rotating deadbolt with mm 24 throw.
Rod-guiding pins. Screws with roses. **780253BFZ** 1 5 5

Locks for iron frames rods excursion 25 mm



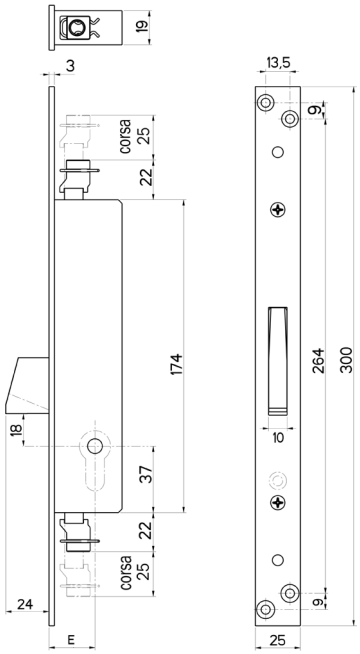

Mortice lock for metal frames, operating with **European profile cylinder**.
One throw, three locking point, front plate in steel, zinc-plated 25x3 mm. **Rods excursion 25 mm**.
Cylinder to be ordered separately.

	Code	Single package		Multiple package
Backset mm 25	**0000007430425**	10	-	10
Backset mm 30	**0000007430430**	10	-	10
Backset mm 35	**0000007430435**	10	-	10

Mortice lock for metal frames, operating with **cross-key** cylinder.
One throw, three locking point, front plate in steel, zinc-plated 25x3 mm. **Rods excursion 25 mm.**
3 keys for cross-key cylinder 91.01.75

	Code	Single package		Multiple package
Backset mm 25	**0000007431125**	1	-	1
Backset mm 30	**0000007431130**	1	-	1
Backset mm 35	**0000007431135**	1	-	1

Mortice lock for metal frames, operating with **cross-key** cylinder.
One throw, three locking point, front plate in steel, zinc-plated 25x3 mm. **Rods excursion 25 mm.**
2 keys for cross-key cylinder 91.01.75


	Code	Single package		Multiple package
Backset mm 25	**0000007431425**	10	-	10
Backset mm 30	**0000007431430**	10	-	10
Backset mm 35	**0000007431435**	10	-	10

Mortice lock for metal frames, operating with **cross-key** cylinder.
One throw, three locking point, front plate in steel, zinc-plated 25x3 mm. **Rods excursion 25 mm.**
1 KA key for cross-key cylinder 91.01.75

	Code	Single package		Multiple package
Backset mm 25	**0000007433425**	10	-	10
Backset mm 30	**0000007433430**	10	-	10
Backset mm 35	**0000007433435**	10	-	10

Locks for iron frames



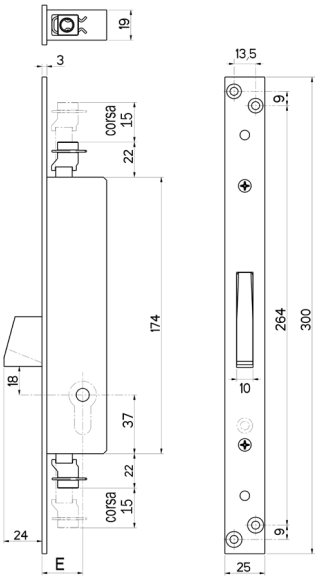

Mortice lock for metal frames, operating with **European profile cylinder**.
One throw, three locking point, front plate in steel, zinc-plated 25x3 mm.
CYLINDER TO BE ORDERED SEPARATELY.

	Code	Single package	Multiple package	Min. ord.
Backset mm 30	**0000007130430**	10	-	10
Backset mm 35	**0000007130435**	10	-	10


Mortice lock for metal frames, operating with **cross-key** cylinder.
One throw, three locking point, front plate in steel, zinc-plated 25x3 mm.
2 keys for cross-key cylinder Ref. 91.01.75

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**0000007131425**	10	-	10
Backset mm 30	**0000007131430**	10	-	10
Backset mm 35	**0000007131435**	10	-	10

■ = Discontinued

Locks for iron frames




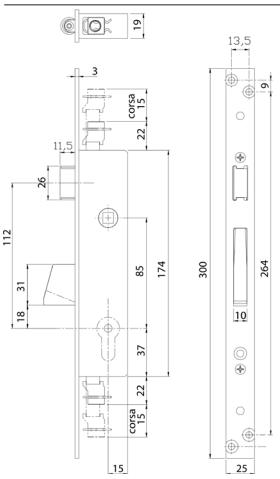

	Code	Single package	Multiple package	Min. ord.
Mortice lock for metal frames, operating with **cross-key** cylinder. One throw, bolt and reversible latch, three locking point, front plate in steel, zinc-plated 25x3 mm 2 cross-keys cod. 91.01.75				
Backset mm 25	**0000007111425**	10	-	10
Backset mm 30	**0000007111430**	10	-	10
Backset mm 35	**0000007111435**	10	-	10
Mortice lock for metal frames, operating with **cross-key** cylinder. One throw, bolt and reversible latch, three locking point, front plate in steel, zinc-plated 25x3 mm 1 cross-key KA cod. 91.01.75				
Backset mm 25	**0000007113425**	10	-	10
Backset mm 30	**0000007113430**	10	-	10
Backset mm 35	**0000007113435**	10	-	10







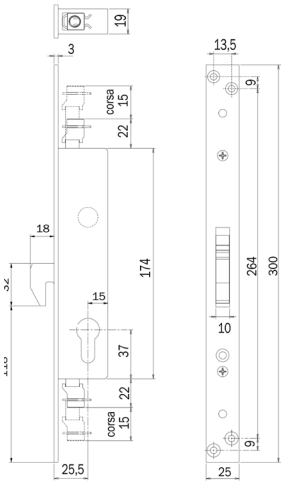

	Code	Single package	Multiple package	Min. ord.
Mortice lock for metal frames, operating with **European profile cylinder**. One throw, three locking point, front plate in steel, zinc-plated 25x3 mm. Cylinder to be ordered separately.				
Backset mm 25	**0000007140425**	10	-	10
Backset mm 30	**0000007140430**	10	-	10
Backset mm 35	**0000007140435**	10	-	10

■ = Discontinued


Accessories

	Code	Single package	Multiple package	Min. ord.
 Striking plate. In zinc-plated steel. For item 711K				
Zinc-plated	**2000007610000**	12	-	12
 Striking plate. In zinc-plated steel. For item 713/713K/714/746				
Zinc-plated	**2000007160200**	12	-	12

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa for shutters stainless steel front plate




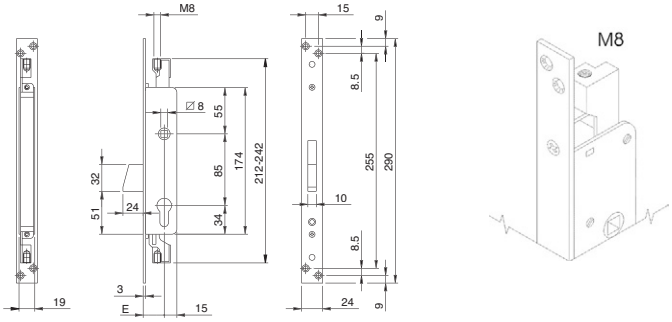

Mortice lock for metal frames, **SHUTTERS**, 3-POINT LOCKING, operating with European profile cylinder. Pre-assembled M8 rod connection.
Rods travel range mm 15. Front plate mm **290x24x3** in STAINLESS STEEL.
Rotating DEADBOLT with mm 24 throw.
Throw by handle follower mm 8, handle locked by cylinder. 1 escutcheon.
Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plate in STAINLESS STEEL - ref. 038020

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783380252**	1	10	10
Backset mm 30	**783380302**	1	10	10
Backset mm 35	**783380352**	1	10	10



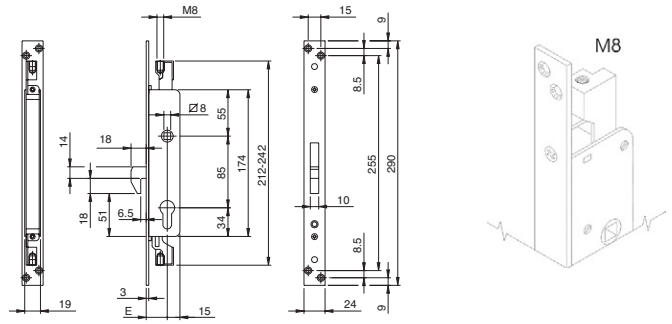

Mortice lock for metal frames, **SHUTTERS**, 3-POINT LOCKING,
operating with European profile cylinder. Pre-assembled M8 rod connection.
Rods travel range mm 15. Front plate mm **290x24x3** in STAINLESS STEEL.
HOOK DEADBOLT, CLEARANCE 6,5, with mm 18 throw.
Throw by handle follower mm 8, handle locked by cylinder. 1 escutcheon.
Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plate in stainless steel - ref. 038020


	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783480252**	1	10	10
Backset mm 30	**783480302**	1	10	10
Backset mm 35	**783480352**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Code | Single package | Multiple package | Min. ord.

for shutters




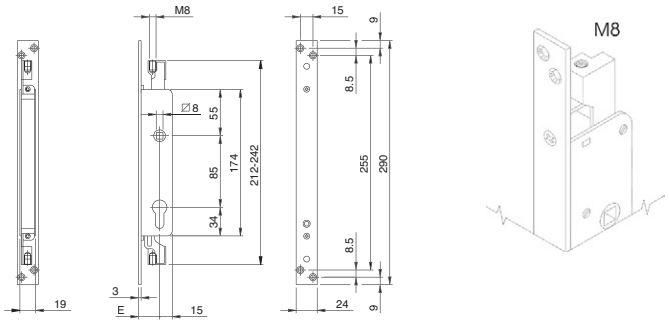

Mortice lock for metal frames, **SHUTTERS**, DOUBLE TOP/BOTTOM LOCKING, operating with European profile cylinder.
Pre-assembled M8 rod connection. Rods travel range mm 15. Front plate mm **290x24x3** in STAINLESS STEEL.
Throw by handle follower mm 8,
handle locked by cylinder. 1 escutcheon.
Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837

Backset mm 25 front plate in stainless steel.	**782080252**	1	10	10
Backset mm 30 front plate in stainless steel.	**782080302**	1	10	10
Backset mm 35 front plate in stainless steel.	**782080352**	1	10	10



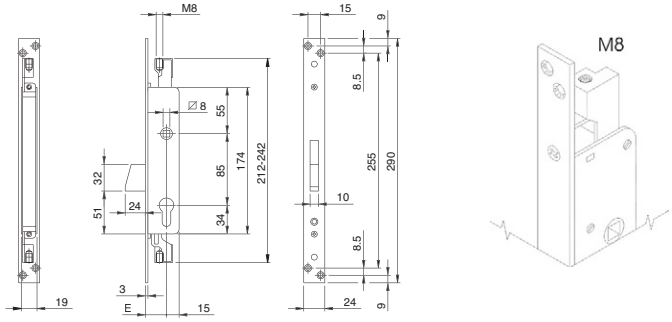


Mortice lock for metal frames, **SHUTTERS**, 3-POINT LOCKING, operating with European profile cylinder.
Pre-assembled M8 rod connection. Rods travel range mm 15. Front plate mm 290X24X3 IN ZINC-PLATED steel.
Rotating DEADBOLT with mm 24 throw. Throw by handle follower mm 8,
handle locked by cylinder. 1 escutcheon.
Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plate in zinc-plated steel - ref. 038022


Backset mm 25 front plate zinc-plated steel.	**783380254**	1	10	10
Backset mm 30 front plate zinc-plated steel.	**783380304**	1	10	10
Backset mm 35 front plate zinc-plated steel.	**783380354**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Electa for shutters zinc-plated steel front plate



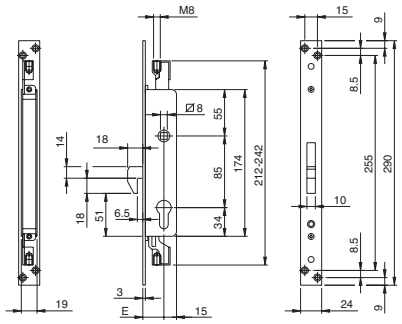





Mortice lock for metal frames, **SHUTTERS**, 3-POINT LOCKING, operating with European profile cylinder.
Pre-assembled M8 rod connection. Rods travel range mm 15. Front plate mm 290X24X3 IN ZINC-PLATED STEEL.
HOOK DEADBOLT, CLEARANCE 6,5, with mm 18 throw. Throw by handle follower mm 8,
handle locked by cylinder. 1 escutcheon.

Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plate in zinc-plated steel - ref. 038022
Gâche INOX - Réf. 038022

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783480254**	1	10	10
Backset mm 30	**783480304**	1	10	10
Backset mm 35	**783480354**	1	10	10



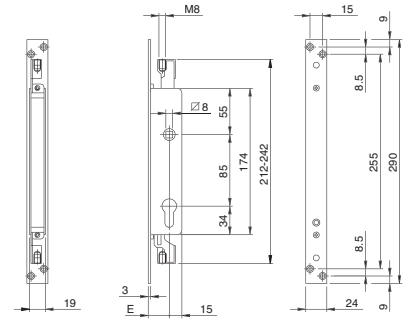




Mortice lock for metal frames, **SHUTTERS**, DOUBLE TOP/BOTTOM LOCKING, operating with European profile cylinder.
Pre-assembled M8 rod connection. Front plate mm **290x24x3** in ZINC-PLATED STEEL.
Rods travel range mm 15. Throw by handle follower mm 8,
handle locked by cylinder. 1 escutcheon.


Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837

	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**782080254**	1	10	10
Backset mm 30	**782080304**	1	10	10
Backset mm 35	**782080354**	1	10	10

Electa for shutters zinc-plated steel front plate



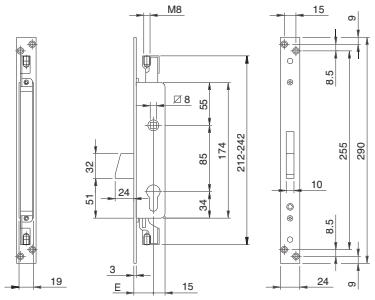



Mortice lock for metal frames, **SHUTTERS**, 3-POINT LOCKING, operating with assembled pin keys cylinder (insert 990875). Pre-assembled M8 rod connection. Rods travel range mm 15.
Front plate mm **290x24x3** in ZINC-PLATED STEEL. Rotating DEADBOLT
mm 24 throw. Throw by handle follower mm 8, handle locked by cylinder. 3 keys.
2 key-guiding bushes (Key blank ref. 020275)

Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plate in zinc-plated steel - ref. 038022


	Code	Single package	Multiple package	Min. ord.
Backset mm 25	**783380254C.9**	1	10	10
Backset mm 30	**783380304C.9**	1	10	10
Backset mm 35	**783380354C.9**	1	10	10

KEYED-ALIKE (K.A.) VERSION IN GROUPS OF 10 PIECES
(Key blank code 020275)

Backset mm 25	**783380254C.9Y**	1	10	10
Backset mm 30	**783380304C.9Y**	1	10	10
Backset mm 35	**783380354C.9Y**	1	10	10
Backset mm 25 single coding 88001	**783380254C.9Y1**	1	10	10
Backset mm 30 single coding 88001	**783380304C.9Y1**	1	10	10
Backset mm 35 single coding 88001	**783380354C.9Y1**	1	10	10
Backset mm 25 single coding 88002	**783380254C.9Y2**	1	10	10
Backset mm 30 single coding 88002	**783380304C.9Y2**	1	10	10
Backset mm 35 single coding 88002	**783380354C.9Y2**	1	10	10
Backset mm 25 single coding 88003	**783380254C.9Y3**	1	10	10
Backset mm 35 single coding 88003	**783380354C.9Y3**	1	10	10
Backset mm 25 single coding 88004	**783380254C.9Y4**	1	10	10
Backset mm 30 single coding 88004	**783380304C.9Y4**	1	10	10
Backset mm 35 single coding 88004	**783380354C.9Y4**	1	10	10
Backset mm 25 single coding 88005	**783380254C.9Y5**	1	10	10
Backset mm 30 single coding 88005	**783380304C.9Y5**	1	10	10
Backset mm 35 single coding 88005	**783380354C.9Y5**	1	10	10

Locks for shutters zinc-plated front plate rods excursion 25 mm



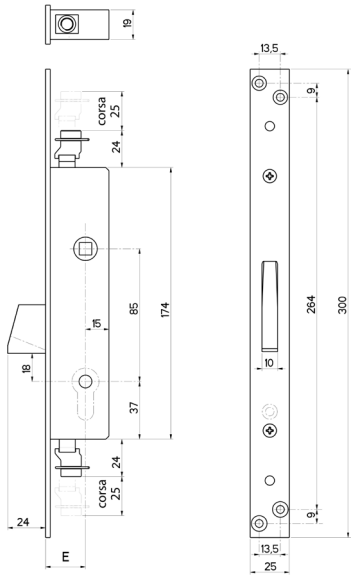

	Code		Single package		Multiple package	Min. ord.
Mortice lock for metal frames, **SHUTTERS**, operating with **European profile cylinder**. Deadbolt operated by handle. One throw lock. Bolt with automatic security blockage. **25mm rod length.** Cylinder to be ordered separately.						
Backset mm 25	**0000007460425**		10	-		10
Backset mm 30	**0000007460430**		10	-		10
Backset mm 35	**0000007460435**		10	-		10




Mortice lock for metal frames, **SHUTTERS**, operating with **cross-key** cylinder. Deadbolt operated by handle. One throw lock. Bolt with automatic security blockage. **25mm rod length.** 3 keys for cross-key cylinder Ref. 91.01.75						
Backset mm 25	**0000007461125**		10	-		10
Backset mm 30	**0000007461130**		10	-		10
Backset mm 35	**0000007461135**		10	-		10
Mortice lock for metal frames, **SHUTTERS**. Euro profile Cylinder (Item 746). Cross key Cylinder (Item 746K). Deadbolt operated by handle. One throw lock. Bolt with automatic security blockage. **25mm rod length.** 2 keys for cross-key cylinder Ref. 91.01.75						
Backset mm 25	**0000007461425**		10	-		10
Backset mm 30	**0000007461430**		10	-		10
Backset mm 35	**0000007461435**		10	-		10
Mortice lock for metal frames, **SHUTTERS**, operating with **cross-key** cylinder. Deadbolt operated by handle. One throw lock. Bolt with automatic security blockage. **25mm rod length.** 1 KA key for cross-key cylinder Ref. 91.01.75						
Backset mm 25	**0000007463425**		10	-		10
Backset mm 30	**0000007463430**		10	-		10
Backset mm 35	**0000007463435**		10	-		10

CERTIFIED PRODUCT

ShutterTop 2.0

Security lock for railings, shutters and gates



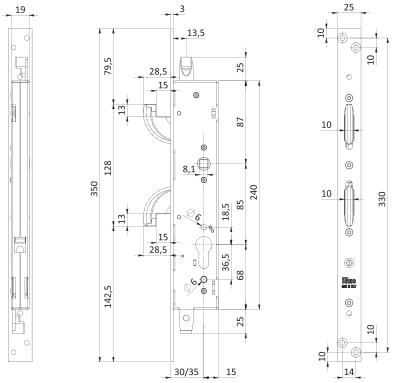


Mortise lock for **RAILINGS, SHUTTERS AND GATES**, TRIPLE LOCKING, European cylinder.
Pre-assembled M8 rod coupling connector. Rod travel 25 mm. Stainless Steel front plate **350X25X3** mm.
Rotating hook bolts with 28.5 mm throw and patented blocking system in the event of attempted burglary.
Bolts equipped with free rotation anti-cut pins. Throw by square handle follower 8mm, handle locking with cylinder.
Through holes for cylinder escucheon. Certified according to the standard EN 12209:2016

Matching accessories:
2 tips Ø 10 for M8 threaded rods - cod. 990836
Kit for internal straight or deviated rods M8 - cod. 990837
Stainless steel strike plate - cod. 033098
2 rods Ø 10 L=1200 - cod. 990811

	Code	Single package	Multiple package	Min. ord.
Backset mm 30	**7C3425302**	1	10	10
Backset mm 35	**7C3425352**	1	10	10



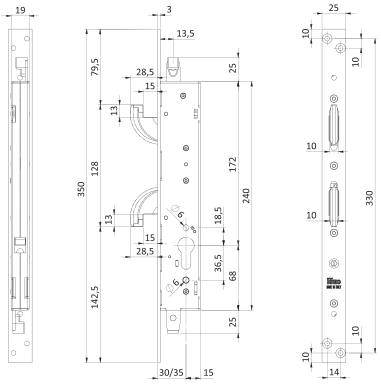

Mortise lock for **RAILINGS, SHUTTERS AND GATES**, TRIPLE LOCKING, European cylinder.
Pre-assembled M8 rod coupling connector. Rod travel 25 mm. Stainless Steel front plate **350X25X3** mm .
Rotating hook bolts with 28.5 mm throw and patented blocking system in the event of attempted burglary.
Bolts equipped with free rotation anti-cut pins. Throw by cylinder. Through holes for cylinder escucheon.
Certified according to the standard EN 12209:2016

Matching accessories:
2 tips Ø 10 for M8 threaded rods - cod. 990836
Kit for internal straight or deviated rods M8 - cod. 990837
Stainless steel strike plate - cod. 033098
2 rods Ø 10 L=1200 - cod. 990811


	Code	Single package	Multiple package	Min. ord.
Backset mm 30	**7C3A25302**	1	10	10
Backset mm 35	**7C3A25352**	1	10	10

CERTIFIED PRODUCT

ShutterTop 2.0

Security lock for railings, shutters and gates



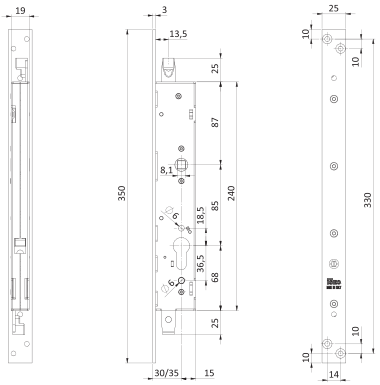


Mortise lock for **RAILINGS, SHUTTERS AND GATES**, Double LOCKING, European cylinder.
Pre-assembled M8 rod coupling connector. Rod travel 25 mm. Stainless Steel front plate **350X25X3** mm.
Throw by square handle follower 8 mm, handle locking with cylinder.
Through holes for cylinder escucheon.
Certified according to the standard EN 12209:2016

Matching accessories:
2 tips Ø 10 for M8 threaded rods - cod. 990836
Kit for internal straight or deviated rods M8 - cod. 990837
Stainless steel strike plate - cod. 033098
2 rods Ø 10 L=1200 - cod. 990811

	Code	Single package	Multiple package	Min. ord.
Backset mm 30	**7C2425302**	1	10	10
Backset mm 35	**7C2425352**	1	10	10








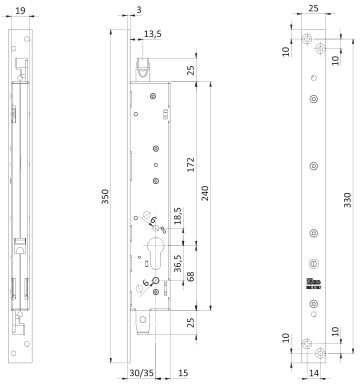


Mortise lock for **RAILINGS, SHUTTERS AND GATES**, Double LOCKING, European cylinder.
Pre-assembled M8 rod coupling connector. Rod travel 25 mm.
Stainless Steel front plate **350X25X3** mm.
Throw by cylinder. Through holes for cylinder escucheon.
Certified according to the standard EN 12209:2016


Matching accessories:
2 tips Ø 10 for M8 threaded rods - cod. 990836
Kit for internal straight or deviated rods M8 - cod. 990837
Stainless steel strike plate - cod. 033098
2 rods Ø 10 L=1200 - cod. 990811

	Code	Single package	Multiple package	Min. ord.
Backset 30 mm	**7C2A25302**	1	10	10
Backset 35 mm	**7C2A25352**	1	10	10

Accessories


	Code	Single package	Multiple package	Min. ord.
  Anti-drilling escoucheon for Euro cylinder. External and internal **aluminium** covers. External cover with anti-drill carbonitrided steel disk. Plate spacers. Anti-drill spheres to protect screws. Fixing screws. PAINTED BLACK	**040809**	1	-	1
 Pair of internal straight and slotted rods Ø 8 SERIE 782-783-963-983-7C2-7C3	**990811**	10	-	10
 Stainless steel strike plate for articles 7C3A e 7C34 Stainless steel	**033098**	1	-	10
 Compact Handle in metallic material. Fixed though expansion squared pin.	**00.235.005**	5	-	5
 Pins, tips and rod-guiding plates for Ø 8 rods.	**990837**	10	-	10
  Floor socket.	**990861**			
 2 tips Ø 10 for threaded rods M8.	**990836**	10	-	10

Accessories

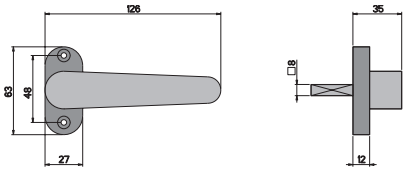


Black plastic
handle
for items 746, 7C2 and 7C3

	Code	Single package	Multiple package	Min. ord.
	0000098000706	12	-	12




Black plastic
handle
for item 746

	0000098000716	12	-	12
Adaptor for cross key cylinder	**5412600260000**	100	-	100



M8 rod screwed
connection
In zinc-plated steel
For item 749

Industrial package without tip	**0000099995011**	50	-	50
With anti-saw tip Ø 8 mm	**0000099990011**	10	-	10




Rod tips, in cemented steel, screw-driver cut
For items 746, 7C3 and 7C2

Ø 10	**0000099997101**	50	-	50
Ø 12	**0000099997121**	50	-	50

741N centre distance 85 741A centre distance 92

Series 741 mortise locks for door jambs are offered in a wide choice of versions and finishes. These locks are available as two different centre distance variants (**85** and **92** mm), each with its own specific characteristics. May be used together with the extensive range of Iseo cylinders to attain any desired degree of security for a metal door. Series 741 locks are compliant with EN12209:2016




Closed case and the fixing holes



Main features: 741N - centre distance 85

- Painted steel case, closed on all sides to prevent the accidental introduction of machining chips from entering the mechanism
- Reversible latchbolt
- 14 mm deadbolt, 1 throw
- 2 fixing holes, 21.5 mm below and 46 mm above the handle
- Compatible with European profile cylinders
- Latchbolt operated by handle and key
- Latchbolt and deadbolt flush with front plate
- 85 mm centre distance
- 8 mm handle follower
- 21, 26, 31, 36 mm backsets
- 22 mm square front plate

Front plate finish
- Chrome-plated steel
- Stainless steel







Main characteristics: 741A - 92 mm centre distance
- Painted steel box enclosed on all sides to keep machining debris out of mechanism
- Reversible latch with adjustable protrusion
- 14 mm deadbolt, single-throw, for 25 mm case size
- Oversized 20 mm deadbolt, single-throw, for 30 and 35 mm case sizes
- 3 through-holes, two of which with centre distance of 43 mm plus one upper hole
- Works with Euro profile cylinder
- Latch retracted with handle and key
- Latch and deadbolt flush with faceplate
- Centre distance 92 mm
- Square handle spindle, 8 mm
- Case sizes 25, 30, 35 mm
- 22 mm faceplate, square edge

Faceplate finish
- stainless steel


741N Locks for metal frames
85 mm centre distance





	Code	Single package	Multiple package	Min. ord.
Closed case mortice lock for metal frames, operating with European profile cylinder. Front plate mm 238x22x3 in **stainless steel**. One 15 mm throw. **REVERSIBLE LATCHBOLT AND DEADBOLT.** Latchlocking by key or handle follower mm 8. Cylinder screw. Version with cylinder on request.				
Backset mm 21	**741N202**	1	10	10
Backset mm 26	**741N252**	1	10	10
Backset mm 31	**741N302**	1	10	10
Backset mm 36	**741N352**	1	10	10
Closed case mortice lock for metal frames, operating with European profile cylinder. Front plate mm 238x22x2,7 in **Chrome-plated**. One 15 mm throw. **REVERSIBLE LATCHBOLT AND DEADBOLT.** Latchlocking by key or handle follower mm 8 . Cylinder screw. Version with cylinder on request.				
Backset mm 21	**741N203**	1	10	10
Backset mm 26	**741N253**	1	10	10
Backset mm 31	**741N303**	1	10	10
Backset mm 36	**741N353**	1	10	10







Closed case mortice lock for metal frames, operating with European profile cylinder. Front plate mm 238x22x3 in **stainless steel**. One 15 mm throw. **ADJUSTABLE ROLLER AND DEADBOLT.** Cylinder screw. Version with cylinder on request.				
Backset mm 21	**743N202**	1	10	10
Backset mm 26	**743N252**	1	10	10
Backset mm 31	**743N302**	1	10	10
Backset mm 36	**743N352**	1	10	10
Closed case mortice lock for metal frames, operating with European profile cylinder. Front plate mm 238x22x2,7 in **Chrome-plated**. One 15 mm throw. **ADJUSTABLE ROLLER AND DEADBOLT.** Cylinder screw. Version with cylinder on request.				
Backset mm 21	**743N203**	1	10	10
Backset mm 26	**743N253**	1	10	10
Backset mm 31	**743N303**	1	10	10
Backset mm 36	**743N353**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

741N Locks for metal frames
85 mm centre distance


	Code	Single package	Multiple package	Min. ord.






Closed case mortice lock for metal frames, operating with European profile cylinder.
Front plate mm 238x22x3 in **stainless steel**. One 15 mm throw. **DEADBOLT ONLY**.
Cylinder screw.
Version with cylinder on request.

Backset mm 21	**745N202**	1	10	10
Backset mm 26	**745N252**	1	10	10
Backset mm 31	**745N302**	1	10	10
Backset mm 36	**745N352**	1	10	10






Closed case mortice lock for metal frames, operating with European profile cylinder.
Front plate mm 238x22x3 in **stainless steel**. **REVERSIBLE LATCHBOLT ONLY**.
Latchlocking by key or handle follower mm 8. Cylinder screw.
Version with cylinder on request.

Backset mm 21	**749N202**	1	10	10
Backset mm 26	**749N252**	1	10	10
Backset mm 31	**749N302**	1	10	10
Backset mm 36	**749N352**	1	10	10

741N Locks for metal frames - centre distance 92




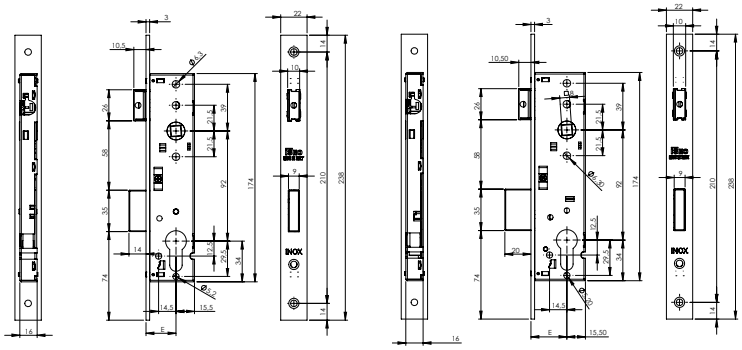

Mortise lock for door jams with sealed casing for use with Euro profile cylinder.
Stainless steel faceplate, **238x22x3** mm. 1 x 14 mm bolt (case size 25), 1 oversized 20 mm bolt (case sizes 30 and 35). **REVERSIBLE/ADJUSTABLE LATCH AND DEADBOLT**
Latch retracted with key or with 8 mm SQUARE HANDLE SPINDLE. Screw for cylinder.

	Code	Single package	Multiple package	Min. ord.
Axe mm 25	**741A252**	1	10	10
Axe mm 30	**741A302**	1	10	10
Axe mm 35	**741A352**	1	10	10



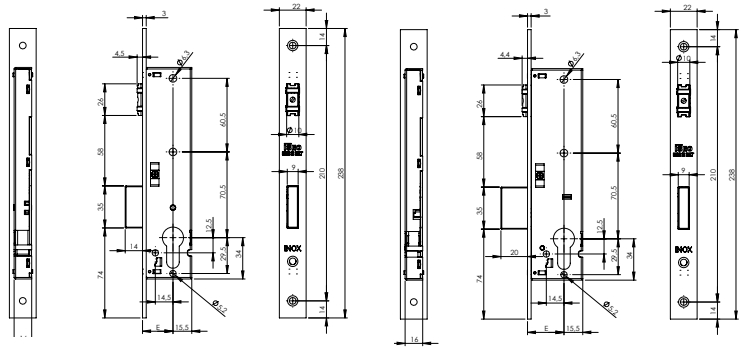


Mortise lock for door jams with sealed casing for use with Euro profile cylinder.
Stainless steel faceplate, **238x22x3** mm. 1 x 14 mm bolt (case size 25), 1 oversized 20 mm bolt (case sizes 30 and 35). **ADJUSTABLE ROLLER AND DEADBOLT**
Screw for cylinder.

	Code	Single package	Multiple package	Min. ord.
Axe mm 25	**743A252**	1	10	10
Axe mm 30	**743A302**	1	10	10
Axe mm 35	**743A352**	1	10	10

741N Locks for glass doors



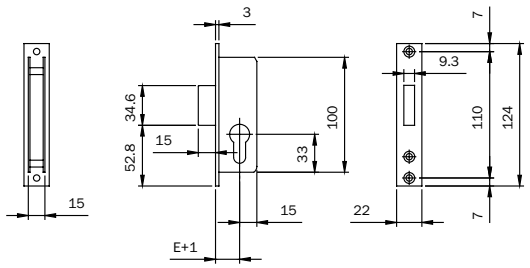


Mortice lock for **GLASS DOORS**, oeprating with European profile cylinder.
Front plate mm **124x22x3** in NICKEL-PLATED STEEL. One 15 mm throw.
Deadbolt flush with front plate. Cylinder screw.
Accessories to be ordered separately:
Striking plate in chrome-plated steel ref. 033094

	Code	Single package	Multiple package	Min. ord.
Backset mm 20 front plate in stainless steel.	**745200F**	1	10	10

Code	Single package	Multiple package	Min. ord.

Locks for metal frames




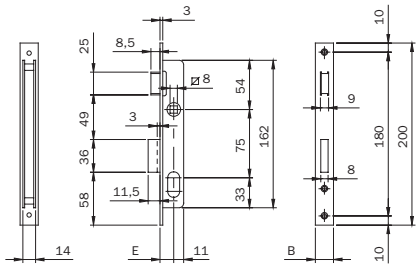

Open-case mortice lock for metal frames, operating with oval cylinder. One 9 mm throw.
CHROME-PLATED STEEL front plate. DEADBOLT extended by 3 mm **SEPARATE LATCHBOLT**
with latchlocking by handle follower mm 8. Backset mm 15. Cylinder screw.
Accessories to be ordered separately:
Striking plate in chrome-plated steel - ref. 033013

Front plate mm **200x16x3**	**7501510**	1	10	10
Front plate mm **200x20x3**	**7501520**	1	10	10




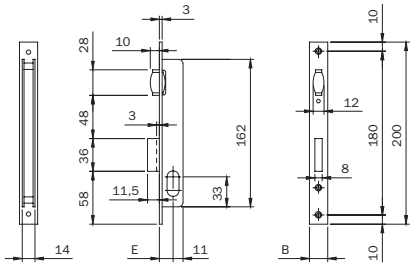

Open-case mortice lock for metal frames, operating with oval cylinder. One 9 mm throw.
CHROME-PLATED STEEL FRONT PLATE. DEADBOLT extended by 3 mm **ADJUSTABLE ROLLER**.
Backset mm 15. Cylinder screw.
Accessories to be ordered separately:
Striking plate in chrome-plated steel - ref. 033013

Front plate mm **200x16x3**	**7521510**	1	10	10
Front plate mm **200x20x3**	**7521520**	1	10	10



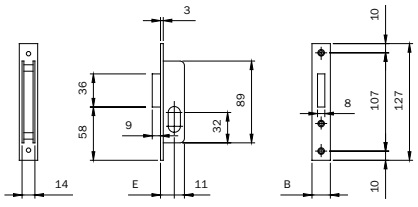

Open-case mortice lock for metal frames, operating with oval cylinder. One 9 mm throw.
Front plate in CHROME-PLATED STEEL. **DEADBOLT FLUSH WITH FRONT PLATE**.
Backset mm 15. Cylinder screw.
Accessories to be ordered separately:
Striking plate in chrome-plated steel - ref. 033013 - ref. 033014


Front plate mm **127x16x3**	**7581510**	1	10	10
Front plate mm **127x20x3**	**7581520**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

	Code	Single package	Multiple package	Min. ord.

Locks for metal frames




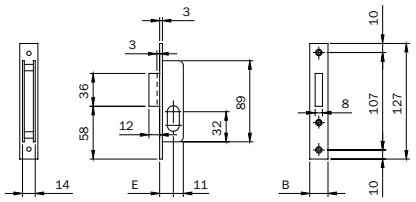

Open-case mortice lock for metal frames, operating with oval cylinder. One 9 mm throw.
Front plate in CHROME-PLATED STEEL.
DEADBOLT extended 3 mm. Backset mm 15.
Cylinder screw.
Accessories to be ordered separately:
Striking plate in chrome-plated steel - ref. 033033 - ref. 033034

Front plate mm **127x16x3**	**7601510**	1	10	10
Front plate mm **127x20x3**	**7601520**	1	10	10




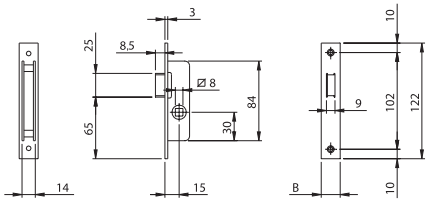

Open-case mortice lock for metal frames. CHROME-PLATED front plate.
LATCHLOCKING by handle follower mm 8.
Accessories to be ordered separately:
Striking plate in chrome-plated steel - ref. 033003 - ref. 033004

Front plate mm **122x16x3**	**762001**	1	10	10
Front plate mm **122x20x3**	**762002**	1	10	10



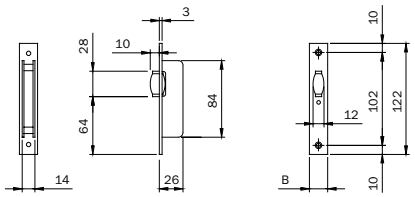


Open-case mortice lock for metal frames. CHROME-PLATED front plate.
ADJUSTABLE ROLLER.
Accessories to be ordered separately:
Striking plate in chrome-plated steel - ref. 033003 - ref. 033004

Front plate mm **122x16x3**	**764001**	1	10	10
Front plate mm **122x20x3**	**764002**	1	10	10

Locks for metal frames




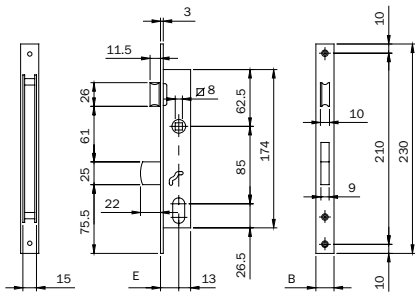

Open-case mortice lock for metal frames, operating with oval cylinder.
1 **BAYONET** throw 22 mm
SEPARATE LATCHBOLT with latchlocking by handle follower mm 8. Backset mm 20. Cylinder screw.
Accessories to be ordered separately:
Chrome-plated striking plate - ref. 033091 - ref. 033092
Chrome-plated brass striking plate - ref. 033091.9 - ref. 033092.9
Gâche en laiton chromé - Réf. 033091.9 - Réf.033092.9

	Code	Single package	Multiple package	Min. ord.
Front plate mm **230x16x3** in CHROME-PLATED STEEL	**7542010**	1	10	10
Front plate mm **230x16x3** in **CORROSION-RESISTANT** CHROME-PLATED BRASS	**75420109**	1	10	10
Front plate mm **230x20x3** in CHROME-PLATED STEEL	**7542020**	1	10	10
Front plate mm **230x20x3** in **CORROSION-RESISTANT** CHROME-PLATED BRASS	**75420209**	1	10	10



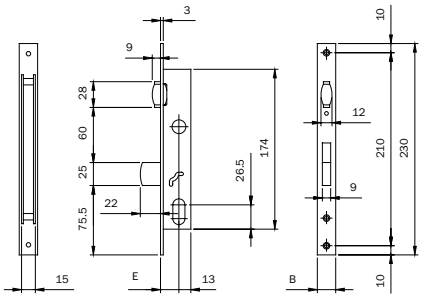


Open-case mortice lock for metal frames, operating with oval cylinder.
1 **BAYONET** throw 22 mm
ADJUSTABLE ROLLER. Backset mm 20. Cylinder screw.
Accessories to be ordered separately:
Chrome-plated steel striking plate - ref. 033091 - ref. 033092
Chrome-plated brass striking plate - ref. 033091.9 - ref. 033092.9

	Code	Single package	Multiple package	Min. ord.
Front plate mm **230x16x3** in CHROME-PLATED STEEL	**7562010**	1	10	10
Front plate mm **230x20x3** in CHROME-PLATED STEEL	**7562020**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Locks for metal frames



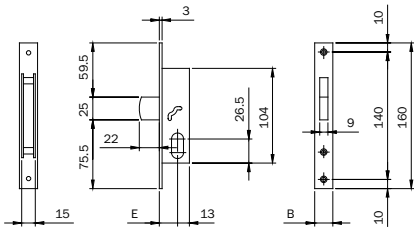

Open-case mortice lock for metal frames, operating with oval cylinder. 1 **BAYONET** throw 22 mm
Backset mm 20. Cylinder screw.


Accessories to be ordered separately:

Chrome-plated steel striking plate - ref. 033091 - ref. 033092

Chrome-plated brass striking plate - ref. 033091.9 - ref. 033092.9

	Code	Single package	Multiple package	Min. ord.
Front plate mm **230x16x3** in CHROME-PLATED STEEL	**7662010**	1	10	10
Front plate mm **230x16x3** in **CORROSION-RESISTANT** CHROME-PLATED BRASS	**76620109**	1	10	10
Front plate mm **230x20x3** in CHROME-PLATED STEEL	**7662020**	1	10	10




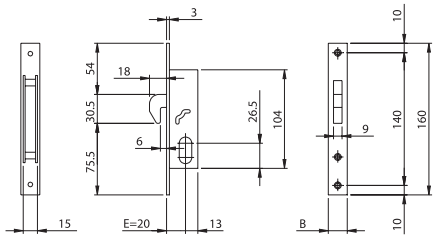

Open-case mortice lock for metal frames, operating with oval cylinder.
1 throw, with **HOOK CLEARANCE 6**, 18 mm. Backset mm 20.
Supplied with striking plate 033095 - 033095.9. Cylinder screw.

Front plate mm **160x16x3** in CHROME-PLATED STEEL	**7682010**	1	10	10
Front plate mm **160x20x3** in CHROME-PLATED STEEL	**7682020**	1	10	10
Front plate mm **160x20x3** in **CORROSION-RESISTANT** CHROME-PLATED BRASS	**76820209**	1	10	10



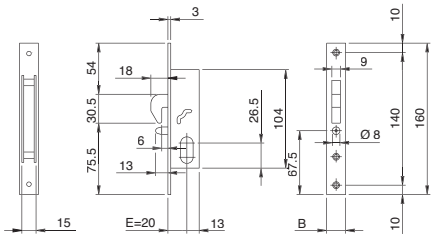


Open-case mortice lock for metal frames, with lift-proof pin, operating with
oval cylinder. 1 throw, **HOOK WITH CLEARANCE 6**, 18 mm. Backset mm 20.
Supplied with striking plate 033095 - 033095.9. Cylinder screw.

Front plate mm **160x16x3** in CHROME-PLATED STEEL	**7682110**	1	10	10
Front plate mm **160x20x3** in CHROME-PLATED STEEL	**7682120**	1	10	10
Front plate mm **160x20x3** in **CORROSION-RESISTANT** CHROME-PLATED BRASS	**76821209**	1	10	10


Locks for metal frames



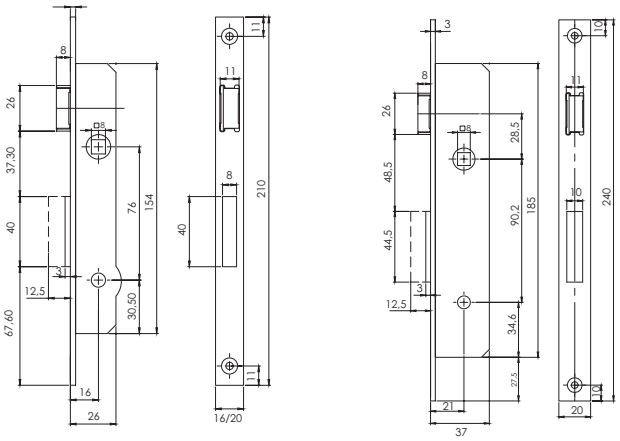


	Code	Single package	Multiple package	Min. ord.
Mortice lock for metal frames.				
One throw, reversable latch, Front plate in steel, nickel-plated.				
1 KA key for cross-key cylinder Ref. 0000000910175				
Backset 16 - Front plate 16	**0000009013116**	2	-	2
Backset 16 - Front plate 20	**0000009014116**	2	-	2
Backset 21 - Front plate 20	**0000009013121**	2	-	2
Mortice lock for metal frames.				
One throw, reversable latch, Front plate in steel, nickel-plated.				
3 keys for cross-key cylinder Ref. 0000000910175				
Backset 16 - Front plate 16	**0000009011116**	2	-	2
Backset 16 - Front plate 20	**0000009012116**	2	-	2
Backset 21 - Front plate 20	**0000009010121**	2	-	2




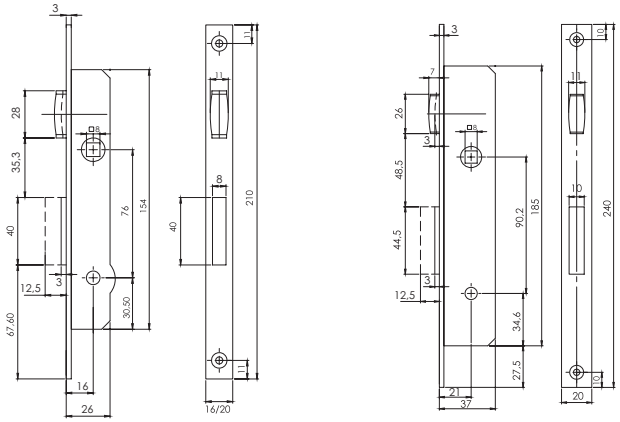

	Code	Single package	Multiple package	Min. ord.
Mortice lock for metal frames.				
One throw, adjustable roller catch, Front plate in steel, nickel-plated.				
1 KA key for cross-key cylinder Ref. 0000000910175				
Backset 16 - Front plate 16	**0000009023116**	2	-	2
Backset 16 - Front plate 20	**0000009024116**	2	-	2
Backset 21 - Front plate 20	**0000009023121**	2	-	2
Mortice lock for metal frames.				
One throw, adjustable roller catch, Front plate in steel, nickel-plated.				
3 keys for cross-key cylinder Ref. 0000000910175				
Backset 16 - Front plate 16	**0000009021116**	2	-	2
Backset 16 - Front plate 20	**0000009022116**	2	-	2
Backset 21 - Front plate 20	**0000009020121**	2	-	2

Locks for metal frames



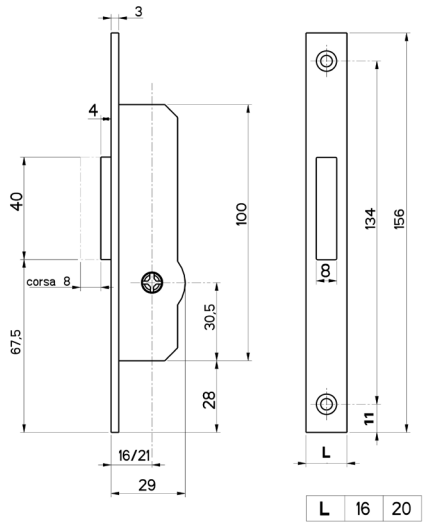

	Code	Single package		Multiple package	Min. ord.

Mortice lock for metal frames.
One throw, Front plate in steel, nickel-plated.
1 KA key for cross-key cylinder Ref. 0000000910175

Backset 16 - Front plate 16	**0000009033116**	2	-		2
Backset 16 - Front plate 20	**0000009034116**	2	-		2
Backset 21 - Front plate 20	**0000009033121**	2	-		2
Backset 16 - Front plate 16	**0000009033416**	12	-		12
Backset 16 - Front plate 20	**0000009034416**	12	-		12

Mortice lock for metal frames.
One throw, Front plate in steel, nickel-plated.
3 keys for cross-key cylinder Ref. 0000000910175


Backset 16 - Front plate 16	**0000009031116**	2	-		2
Backset 16 - Front plate 20	**0000009032116**	2	-		2
Backset 21 - Front plate 20	**0000009030121**	2	-		2

Mortice lock for metal frames.
One throw, Front plate in steel, nickel-plated.
2 keys for cross-key cylinder Ref. 0000000910175

Backset 16 - Front plate 16	**0000009031416**	12	-		12
Backset 16 - Front plate 20	**0000009032416**	12	-		12

Locks for metal frames



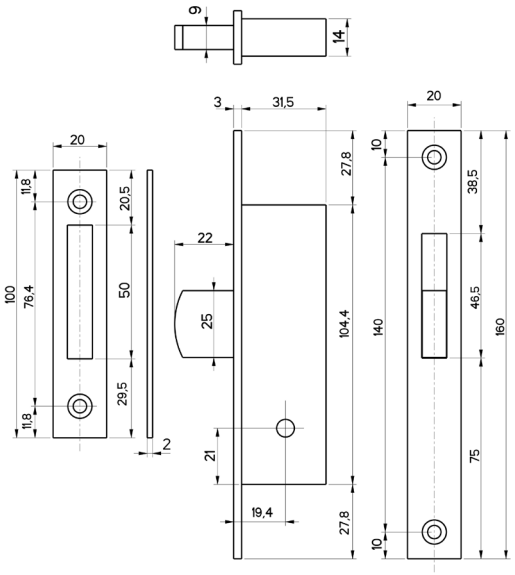


	Code	Single package	Multiple package	Min. ord.
Mortice lock for metal frames. Backset 20. Tipping bolt, Front plate in steel, nickel-plated. 2 keys for cross-key cylinder Ref. 91.01.75	**0000003031420**	12	-	12

Mortice lock for metal frames. Backset 20.
Tipping bolt, Front plate in steel, nickel-plated.
Available KA groups with 12 locks or multiple of it.
1 KA key for cross-key cylinder Ref. 91.01.75

Backset 19,4 - Front plate 20 KA1	**0000003033421**	12	-	12
Backset 19,4 - Front plate 20 KA2	**0000003033422**	12	-	12

Locks for metal frames




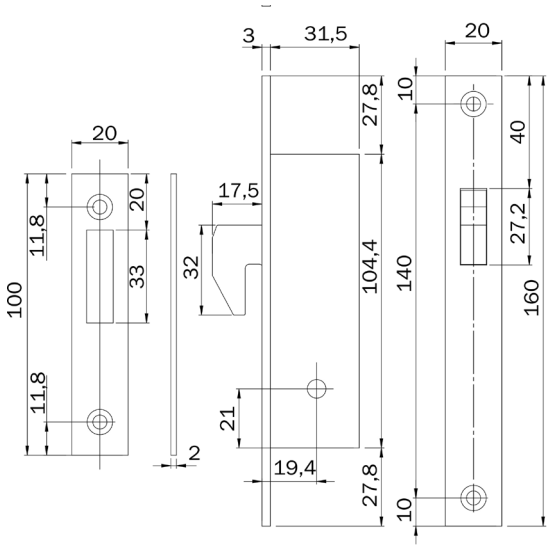

	Code	Single package	Multiple package	Min. ord.
Mortice lock for metal frames. Backset 20. Backing hook bolt, Front plate in steel, nickel-plated. 2 keys for cross-key cylinder Ref. 91.01.75	**000003041420**	12	-	12


Mortice lock for metal frames. Backset 20.
Backing hook bolt, Front plate in steel, nickel-plated.
Available KA groups with 12 locks or multiple of it.
1 KA keys for cross-key cylinder Ref. 91.01.75


Backset 19,4 - Front plate 20 KA1	**000003043421**	12	-	12
Backset 19,4 - Front plate 20 KA2	**000003043422**	12	-	12

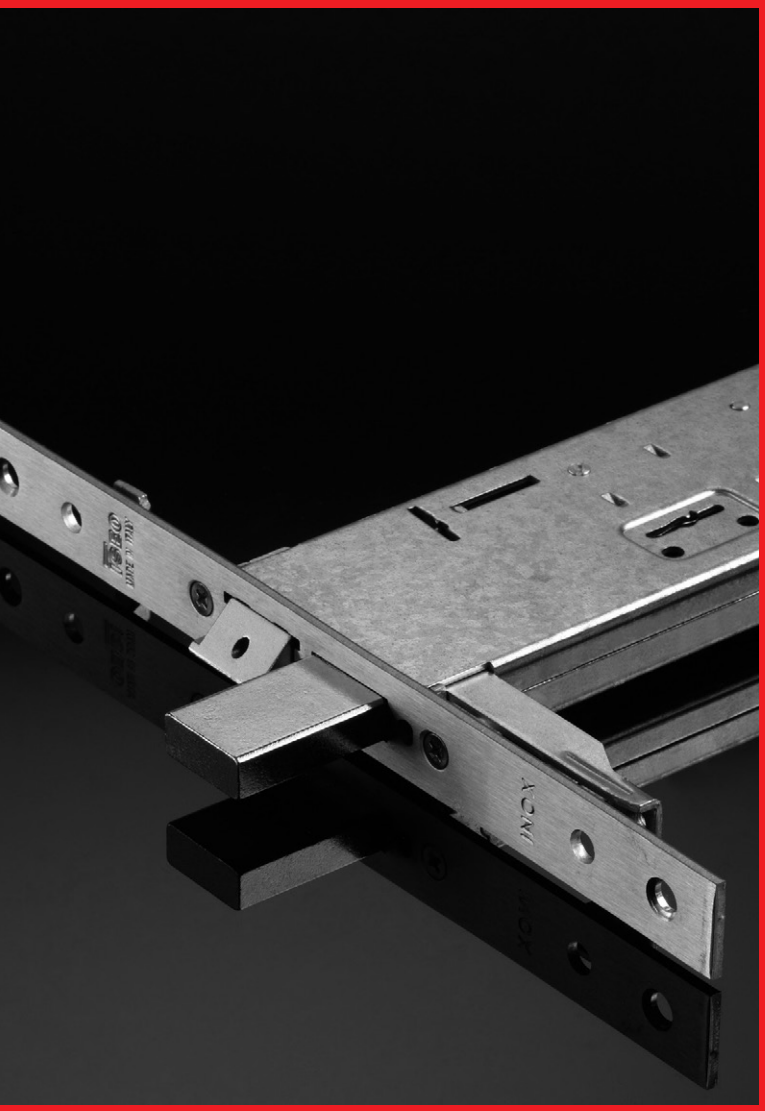

Mortice locks for metal frames

Electric mortice locks stainless steel front plate mm 22



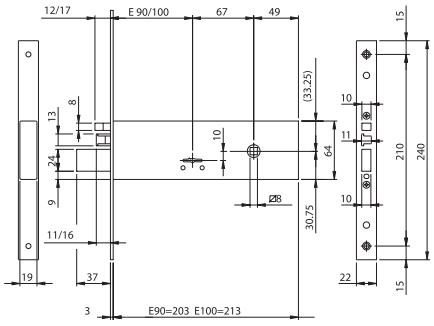

	Code	Single package	Multiple package	Min. ord.


Double-bit electric mortice lock for metal frames. **12Vac/dc**. LATERAL LOCKING. 3 KEYS **mm 100**.
Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws.
LATCHBOLT AND SEPARATE. REVERSIBLE AND ADJUSTABLE LOADING SPRING.
2 nylon key guides. Pair of front plate supports. Fixing screws.
Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Striking plate


Backset mm 100	**961900102**	1	10	10
Backset mm 90	**961900902**	1	10	10


Double-bit electric mortice lock for metal frames. **12Vac/dc**.LATERAL LOCKING. 3 KEYS **mm 79**.
Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws.
LATCHBOLT AND SEPARATE REVERSIBLE AND ADJUSTABLE loading spring.
2 nylon key guides. Pair of front plate supports. Fixing screws.
Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Striking plate

Backset mm 100	**961910102**	1	10	10
Backset mm 90	**961910902**	1	10	10

Electric mortice locks
stainless steel front plate mm 22



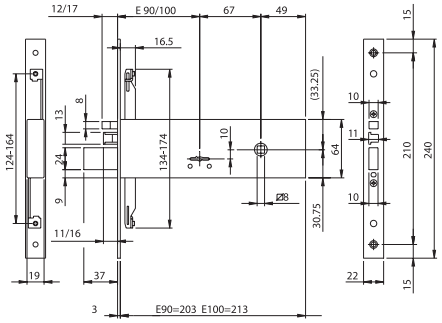




Double-bit electric mortice lock for metal frames. **12Vac/dc**. 3-POINT LOCKING. Rods screwed connection.
3 KEYS **mm 100**. Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws.
SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT.
2 nylon key-guides. Pair of front plate supports.
Fixing screws. Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Pair of plates to connect the lock to the external rods - ref. 990853
Deviators for lateral 3-point locking, external rods - ref. 780322252
Deviators for lateral 3-point locking, internal rods - ref. 780302252
Pair of internal deviated rods with accessories - ref. 990850
Pair of internal straight rods - ref. 990851
Striking plates


	Code	Single package	Multiple package	Min. ord.
Backset mm 100	**963900102**	1	10	10
Backset mm 90	**963900902**	1	10	10

Double-bit electric mortice lock for metal frames. **12Vac/dc**. 3-POINT LOCKING. Rods screwed connection.
3 KEYS **mm 79**. Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws.
SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT.
2 nylon key-guides. Pair of front plate supports.
Fixing screws. Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Pair of plates to connect the lock to the external rods - ref. 990853
Deviators for lateral 3-point locking, external rods - ref. 780322252
Deviators for lateral 3-point locking, internal rods - ref. 780302252
Pair of internal deviated rods with accessories - ref. 990850
Pair of internal straight rods - ref. 990851
Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 100	**963910102**	1	10	10
Backset mm 90	**963910902**	1	10	10

Mortice locks
stainless steel front plate mm 22



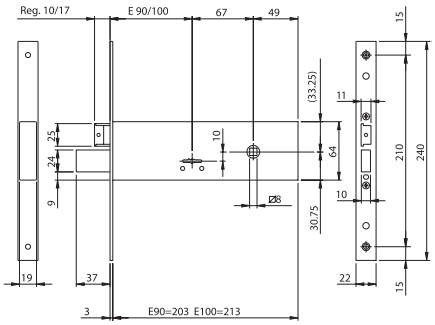


Double-bit mortice lock for metal frames. **MODULAR**. LATERAL LOCKING. 3 KEYS **mm 100**.
Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws
REVERSIBLE AND ADJUSTABLE LATCHBOLT.
THE LATCHBOLT CAN BE REPLACED WITH THE ROLLER OR WITH THE CAP FOR ONLY DEADBOLT VERSIONS.
2 nylon key guides. Pair of front plate supports. Cylinder fixing screws. Fixing screws.
Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Modular roller - ref. 040820
Modular plug for latchbolt hole - ref. 040830
Striking plates


	Code	Single package	Multiple package	Min. ord.
Backset mm 100	**961100102**	1	10	10
Backset mm 90	**961100902**	1	10	10


Double-bit mortice lock for metal frames. **MODULAR**. LATERAL LOCKING. 3 KEYS **mm 79**.
Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws
REVERSIBLE AND ADJUSTABLE LATCHBOLT.
THE LATCHBOLT CAN BE REPLACED WITH THE ROLLER OR WITH THE CAP FOR ONLY DEADBOLT VERSIONS.
2 nylon key guides. Pair of front plate supports. Cylinder fixing screw. Fixing screws.
Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Modular roller - ref. 040820
Modular plug for latchbolt hole - ref. 040830
Striking plates
Tappo modulare per foro scrocco - cod. 040830
Contropiastre

	Code	Single package	Multiple package	Min. ord.
Backset mm 100	**961110102**	1	10	10
Backset mm 90	**961110902**	1	10	10

Mortice locks
stainless steel front plate mm 22



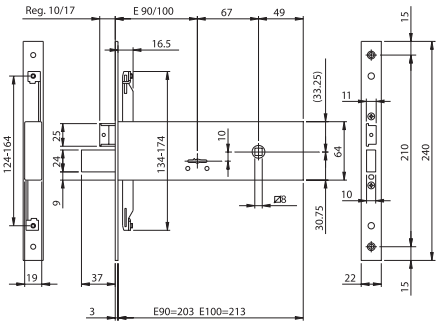



Double-bit mortice lock for metal frames. **MODULAR**. 3-POINT LOCKING. Rods screwed connections.
3 KEYS **mm 100**. Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 trows
REVERSIBLE AND ADJUSTABLE LATCHBOLT.
THE LATCHBOLT CAN BE REPLACED WITH THE ROLLER OR WITH THE CAP FOR ONLY DEADBOLT VERSIONS.
2 nylon key guides. Pair of front plate supports. Cylinder fixing screw. Fixing screws. Instruction sheet (Key blank 990802).
Accessories to be ordered separately:
Modular roller - ref. 040820
Modular plug for latchbolt hole - ref. 040830
Pair of plates to connect the lock to the external rods - ref. 990853
Deviators for lateral 3-point locking, external rods - ref. 780322252
Deviators for lateral 3-point locking, internal rods - ref. 780302252
Pair of internal deviated rods with accessories - ref. 990850
Pair of internal straight rods - ref. 990851
Striking plates


	Code	Single package	Multiple package	Min. ord.
Backset 100 mm	**963100102**	1	10	10
Backset 90 mm	**963100902**	1	10	10


Double-bit mortice lock for metal frames. **MODULAR**. 3-POINT LOCKING. Rods screwed connections.
3 KEYS **mm 79**. Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Four mm 9 throws
REVERSIBLE AND ADJUSTABLE LATCHBOLT.
THE LATCHBOLT CAN BE REPLACED WITH THE ROLLER OR WITH THE CAP FOR ONLY DEADBOLT VERSIONS.
2 nylon key guides. Pair of front plate supports. Cylinder fixing screw. Fixing screws. Instruction sheet. (Key blank 990802).
Accessories to be ordered separately:
Modular roller - ref. 040820
Modular plug for latchbolt hole - ref. 040830
Pair of plates to connect the lock to the external rods - ref. 990853
Deviators for lateral 3-point locking, external rods - ref. 780322252
Deviators for lateral 3-point locking, internal rods- ref. 780302252
Pair of internal deviated rods with accessories - ref. 990850
Pair of internal straight rods - ref. 990851
Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset 100 mm	**963110102**	1	10	10
Backset 90 mm	**963110902**	1	10	10

Electric mortice locks stainless steel front plate mm 22


	Code	Single package	Multiple package	Min. ord.




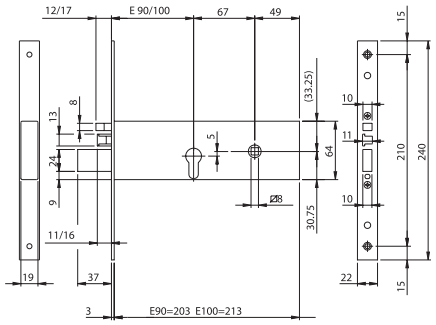


Electric mortice lock for metal frames operating with European profile cylinder. **12Vac/dc**. LATERAL LOCKING.
Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Three mm 12 throws.
LATCHBOLT AND SEPARATE REVERSIBLE AND ADJUSTABLE LOADING SPRING
2 escutcheons. Pair of front plate supports.
Fixing screws. Instruction sheet.
Accessories to be ordered separately:
Striking plates

Backset 100 mm	**961920102**	1	10	10
Backset 90 mm	**961920902**	1	10	10



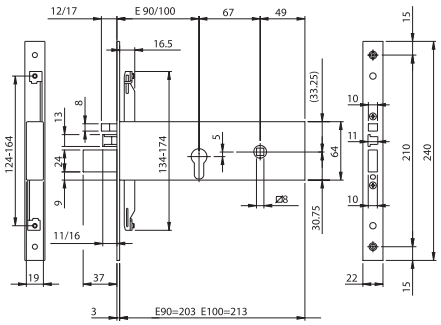




Electric mortice lock for metal frames operating with European profile cylinder. **12Vac/dc**. 3-POINT LOCKING.
Rods screwed connection. Front plate in STAINLESS STEEL **240X22X3**. Case height mm 64. Three mm 12 throws.
LATCHBOLT AND SEPARATE ADJUSTABLE AND REVERSIBLE LOADING SPRING.
2 escutcheons. Pair of front plate supports. Internal cylinder screw.
Fixing screws. Instruction sheet.
Accessories to be ordered separately:
Pair of plates to connect the lock to the external rods - ref. 990853
Deviators for lateral 3-point locking, external rods - ref. 780322252
Deviators for lateral 3-point locking, internal rods - ref. 780302252
Pair of internal deviated rods with accessories - ref. 990850
Pair of internal straight rods - ref. 990851
Striking plates

Backset 100 mm	**963920102**	1	10	10
Backset 90 mm	**963920902**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Mortice locks
stainless steel front plate mm 22




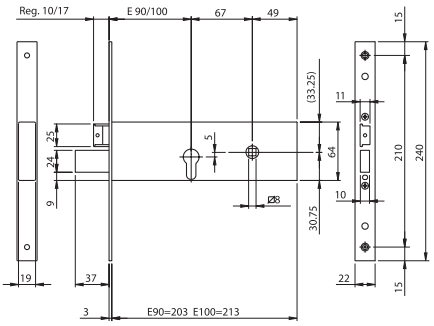

Double-bit mortice lock for metal frames. **MODULAR**. LATERAL LOCKING. Front plate in STAINLESS STEEL **240X22X3**.
Case height mm 64. Three mm 12 throws. **SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT.**
THE LATCHBOLT CAN BE REPLACED WITH THE ROLLER OR WITH THE CAP FOR ONLY DEADBOLT VERSIONS.
2 escutcheons. Pair of front plate supports. Cylinder fixing screw. Fixing screws. Instruction sheet.
Accessories to be ordered separately:
Modular roller - ref. 040820
Modular plug for latchbolt hole - ref. 040830
Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 100	**961120102**	1	10	10
Backset mm 90	**961120902**	1	10	10




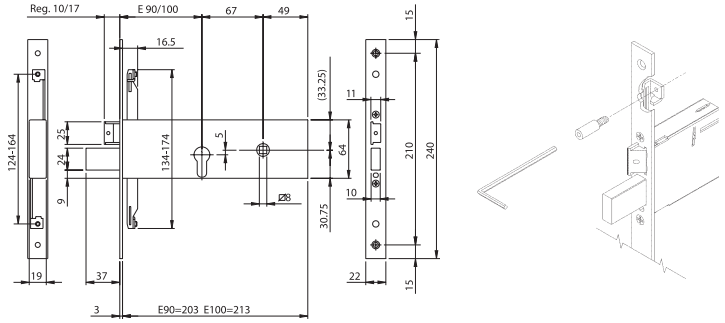


Double-bit mortice lock for metal frames. **MODULAR**. 3-POINT LOCKING. Rods screwed connections.
Front plate in STAINLESS STEEL **240X22X3.** Case height mm 64. Three mm 12 throws.
SEPARATE REVERSIBLE AND ADJUSTABLE LATCHBOLT. THE LATCHBOLT CAN BE REPLACED WITH THE ROLLER OR WITH THE CAP FOR ONLY DEADBOLT VERSIONS. 2 escutcheons.
Pair of front plate supports. Internal cylinder fixing screw.
Fixing screws. Instruction sheet.
Accessories to be ordered separately:
Modular roller - ref. 040820
Modular plug for latchbolt hole - ref. 040830
Pair of plates to connect the lock to the external rods - ref. 990853
Deviators for lateral 3-point locking, external rods - ref. 780322252
Deviators for lateral 3-point locking, internal rods - ref. 780302252
Pair of internal deviated rods with accessories - ref. 990850
Pair of internal straight rods - ref. 990851
Striking plates


	Code	Single package	Multiple package	Min. ord.
Backset mm 100	**963120102**	1	10	10
Backset mm 90	**963120902**	1	10	10


Mortice locks
stainless steel front plate mm 22

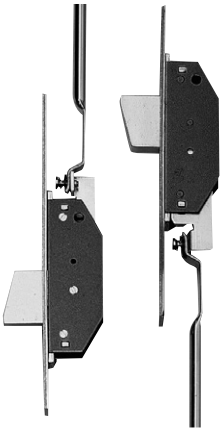

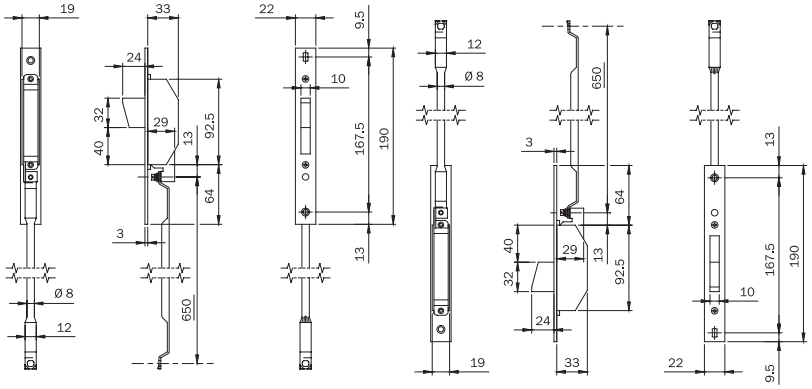

Deviators for 3-point lateral locking. Internal rods to be used with locks with screwed connection.
Front plate mm **190x22x3** in STAINLESS STEEL. Rotating DEADBOLT with mm 24 throw.
2 pairs of nylon spacers.
Rod-guiding nylon bushes. Fixing screws. **780302252** 1 5 5

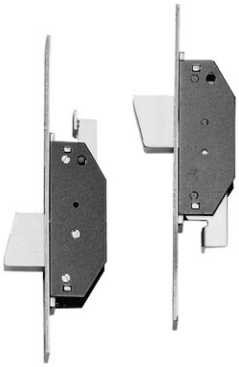

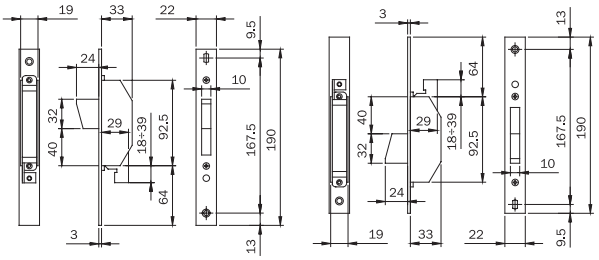

Deviators for 3-point lateral locking. For assembly with external to be used with locks
with rods screwed connection. Front plate mm **190x22x3** in STAINLESS STEEL.
Rotating DEADBOLTwith mm 24 throw.2 pairs of nylon spacers.
Rod-guiding nylon bushes. Fixing screws. **780322252** 1 5 5




Roller for double-bit **MODULAR** lock. With nylon insert for adjustable striking plates.
Spring. Spring plate. **040820** 10 - 10




Plug for double-bit **MODULAR** lock. In nickel-plated zamak. To be assembled instead of
the latchbolt for only deadbolt versions. Screw. **040830** 10 - 10

Code | Single package | Multiple package | Min. ord.


Mortice locks
zinc-plated front plate mm 24




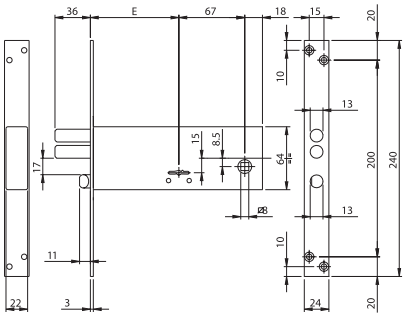

Double-bit mortice lock for metal frames. LATERAL LOCKING. 3 KEYS **mm 79**.
Front plate in zinc-plated steel **240x24x3.** Case height mm 64. Four throws, two loading springs Ø 13, mm 9.
SEPARATE REVERSIBLE LATCHBOLT. Latchbolt by key or handle follower mm 8.
2 escutcheons. Fixing screws. (Key blank 990800).
Accessories to be ordered separately:
Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset mm 70	**961701B4**	1	10	10
Backset mm 90	**961901B4**	1	10	10



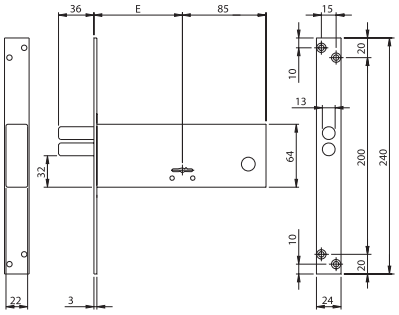



Serrure à larder horizontale à clé double codification. FERMETURE LATÉRALE. 3 CLÉS de **79 mm.**
Têtière en acier galvanisé **240x24x3 mm**. Hauteur de coffre 64 mm.
Quatre déplacements de 9 mm. 2 PISTONS Ø 13 mm.
2 enjoliveurs. Vis de fixage fournies. (Ébauche de clé réf. 990800).
Accessoires à associer:
Gâches


	Code	Single package	Multiple package	Min. ord.
Backset mm 70	**961703B4**	1	10	10
Backset mm 90	**961903B4**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Mortice locks
zinc-plated front plate mm 24




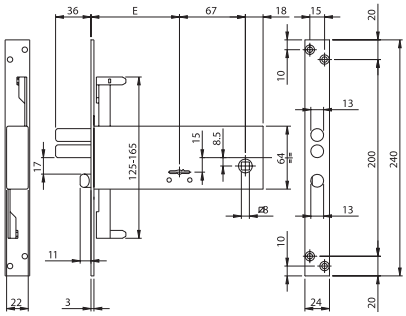




Double-bit mortice lock for metal frames. 3-POINT LOCKING. Rods clutch connections. 3 KEYS **mm 79**.
Front plate in zinc-plated steel **240x24x3.** Case height mm 64. Four throws, two loading springs Ø 13, mm 9.
SEPARATE REVERSIBLE LATCHBOLT. Latchlocking by key or handle follower mm 8.
2 escutcheons. Fixing screws. (Key blank 990800).
Accessories to be ordered separately:
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811
Screwed connection M8 for threaded rods - ref. 990823
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plates


	Code	Single package	Multiple package	Min. ord.
Backset mm 70	**963701B4**	1	10	10
Backset mm 90	**963901B4**	1	10	10




Double-bit mortice lock for metal frames. 3-POINT LOCKING. Rods clutch connections. 3 KEYS **mm 79**.
Front plate in zinc-plated steel **240x24x3**. Case height mm 64. Four throws, two loading springs Ø 13, mm 9.
2 escutcheons. Fixing screws. (Key blank 990800).
Accessories to be ordered separately:
Pair of internal deviated and slotted rods Ø 8 - ref. 990810
Pair of internal straight and slotted rods Ø 8 - ref. 990811
Screwed connection M8 for threaded rods - ref. 990823
Pins, tips and rod-guiding plates for Ø 8 rods - ref. 990837
Striking plates



	Code	Single package	Multiple package	Min. ord.
Backset mm 70	**963703B4**	1	10	10
Backset mm 90	**963903B4**	1	10	10



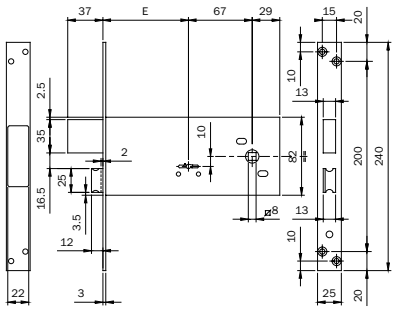



Double-bit mortice lock for metal frames. 3-POINT LOCKING. 3 KEYS **mm 79**. Backset 90 mm
Front plate in zinc-plated steel **240x25x3.** Case height mm 82. Four mm 9 throws. **SEPARATE REVERSIBLE LATCHBOLT.** Latchlocking by key or handle follower mm 8. 2 escutcheons. Fixing screws. **PACKED IN INDIVIDUAL BOXES.** (Key blank 990800).
Accessories to be ordered separately:
Striking plates

	Code	Single package	Multiple package	Min. ord.
Backset 90 mm	**981901.FZ**	1	10	10

Mortice locks
zinc-plated front plate mm 25

Code	Single package	Multiple package	Min. ord.



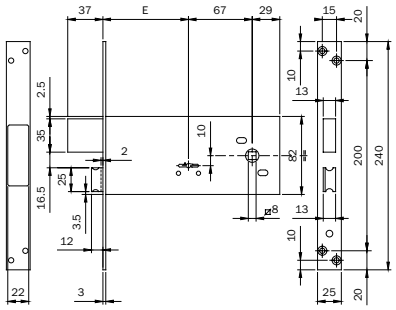



Double-bit mortice lock for metal frames. LATERAL LOCKING. 2 KEYS **mm 79**. Backset 90 mm Front plate in zinc-plated steel **240x25x3.** Case height mm 82. Four mm 9 throws. **SEPARATE REVERSIBLE LATCHBOLT.** Latchlocking by key or handle follower mm 8. 2 escutcheons. Fixing screws. **PACKED IN NYLON BAGS.** (Key blank 990800).


Accessories to be ordered separately:

Striking plates

Backset mm 90 — **981901BFZ** — 1 — 10 — 10



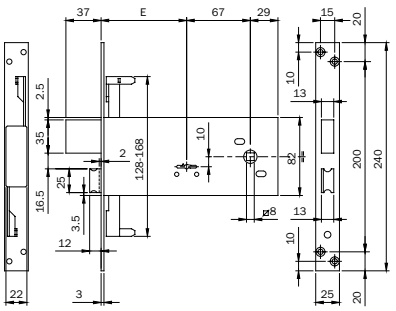





Double-bit mortice lock for metal frames. 3-POINT LOCKING. Rods clutch connection. 2 KEYS **mm 79**. Backset 90 mm Front plate in zinc-plated steel **240x25x3.** Case height mm 82. Four mm 9 throws. **SEPARATE REVERSIBLE LATCHBOLT.** Latchlocking by key or handle follower mm 8. 2 escutcheons. Fixing screws. **PACKED IN INDIVIDUAL BOXES.** (Key blank 990800).


Accessories to be ordered separately:

Striking plates

Backset mm 90 — **983901.FZ** — 1 — 10 — 10



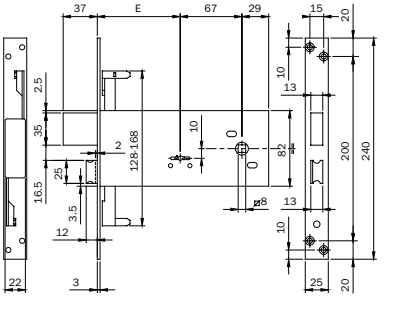



Double-bit mortice lock for metal frames. 3-POINT LOCKING. Rods clutch connection. 2 KEYS **mm 79**. Backset 90 mm Front plate in zinc-plated steel **240x25x3.** Case height mm 82. Four mm 9 throws. **SEPARATE REVERSIBLE LATCHBOLT.** Latchlocking by key or handle follower mm 8. 2 escutcheons. Fixing screws. **PACKED IN NYLON BAGS.** (Key blank 990800).

Accessories to be ordered separately:


Striking plates


Backset mm 90 — **983901BFZ** — 1 — 10 — 10


ISEO
ULTIMATE ACCESS TECHNOLOGIES

Mortice locks
zinc-plated front plate mm 25

	Code	Single package	Multiple package	Min. ord.




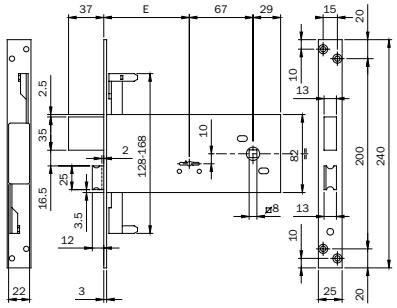




ouble-bit mortice lock for metal frames. 3-POINT LOCKING. Supplied with M8 rods screwed connections. 2 KEYS **mm 79**.
Backset 90 mm Front plate in zinc-plated steel **240x25x3**. Case height mm 82. Four mm 9 throws.
SEPARATE REVERSIBLE LATCHBOLT. Latchlocking by key or handle follower mm 8. 2 escutcheons.
2 escutcheons. Fixing screws. **PACKED IN NYLON BAGS.** (Key blank 990800)
Accessories to be ordered separately:
Striking plates


Backset mm 90	**983901BFZR**	1	10	10

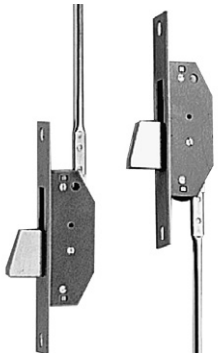


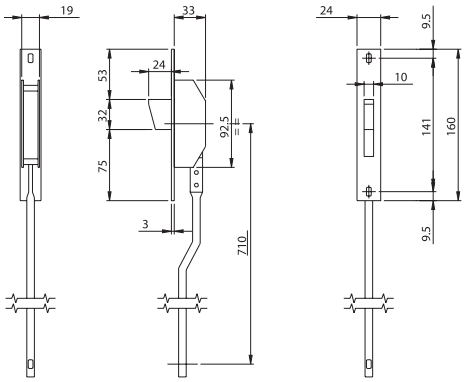

Deviators for 3-point lateral locking. Internal rods to be used with locks with clutch connection.
Front plate mm **160x24x3** in STAINLESS STEEL. Rotating DEADBOLT mm 24 throw.
Rod-guiding pins.
Screws with roses. Instruction sheet.

	780253.FZ	1	10	10

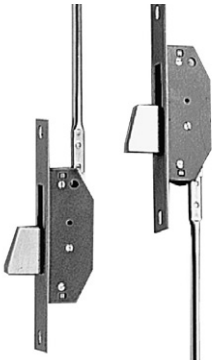


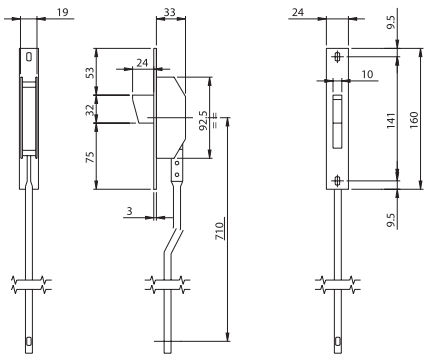


Deviators for 3-point lateral locking. Internal rods to be used with locks with clutch connection.
Front plate mm **160X22X3** IN ZINC-PLATED STEEL. Rotating DEADBOLT with mm 24 throw.
Rod-guiding pins.
Screws with roses.


Backset mm 90	**780253BFZ**	1	10	10


Electric mortice locks zinc-plated front plate



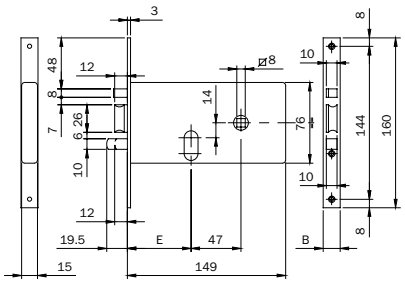

	Code	Single package	Multiple package	Min. ord.
Zinc-plated electric mortice lock for metal frames operating with oval cylinder. **12Vac**. Case mm 76 center distance 47. Zinc-plated front plate **160x16x3**. Two throws. **SELF-LOCKING LATCHBOLT WITH SEPARATE LOADING SPRING.** Instruction sheet. Cylinder fixing screw.				
Backset 60 mm	**5506010**	1	10	10
Backset 70 mm	**5507010**	1	10	10
Zinc-plated electric mortice lock for metal frames operating with oval cylinder. **12Vac**. Case mm 76 center distance 47. Zinc-plated front plate **160x20x3**. Two throws. **SELF-LOCKING LATCHBOLT WITH SEPARATE LOADING SPRING.** Instruction sheet. Cylinder fixing screw.				
Backset 60 mm	**5506020**	1	10	10
Backset 70 mm	**5507020**	1	10	10




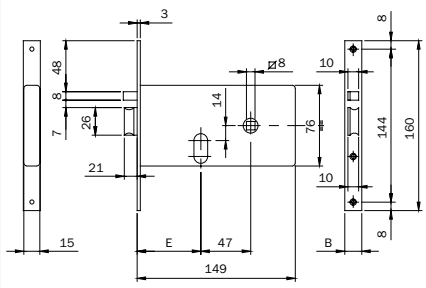

	Code	Single package	Multiple package	Min. ord.
Zinc-plated electric mortice lock for metal frames operating with oval cylinder. **12Vac**. Case mm 76 center distance 47. Zinc-plated front plate **160x16x3**. **SELF-LOCKING LATCHBOLT WITH SEPARATE LOADING SPRING.** Hold-open device. Instruction sheet. Cylinder fixing screw.				
Backset 60 mm	**5516010**	1	10	10
Backset 70 mm	**5517010**	1	10	10
Zinc-plated electric mortice lock for metal frames operating with oval cylinder. **12Vac**. Case mm 76 center distance 47. Zinc-plated front plate **160x20x3**. **SELF-LOCKING LATCHBOLT WITH SEPARATE LOADING SPRING.** Hold-open device. Instruction sheet. Cylinder fixing screw.				
Backset 60 mm	**5516020**	1	10	10
Backset 70 mm	**5517020**	1	10	10

Mortice locks
zinc-plated front plate



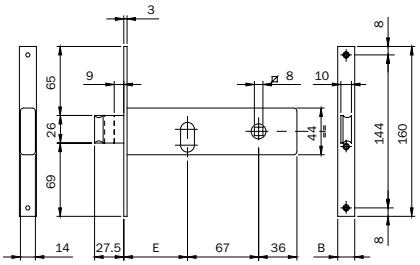

	Code	Single package	Multiple package	Min. ord.
Lock for metal frames. LATERAL LOCKING. Operating with oval cylinder. Zinc-plated case H 44. Zinc-plated front plate mm **160x16x3**. **DEADBOLT WITH mm 9 THROW WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. Cylinder fixing screw.				
Backset 60 mm 1 déplacement	**7046010**	1	10	10
Backset 70 mm Deux déplacements	**7047010**	1	10	10
Backset 80 mm Deux déplacements	**7048010**	1	10	10
PACKED IN NYLON BAGS				
Backset 60 mm one throw	**704601S**	1	10	10
Backset 70 mm two throws	**704701S**	1	10	10
Backset 80 mm two throws	**704801S**	1	10	10
Lock for metal frames. LATERAL LOCKING. Operating with oval cylinder. Zinc-plated case H 44. Zinc-plated front plate mm **160X20X3. DEADBOLT WITH mm 9 THROW WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. Cylinder fixing screw.				
Backset 60 one throw	**7046020**	1	10	10
Backset 70 two throws	**7047020**	1	10	10
Backset 80 two throws	**7048020**	1	10	10
PACKED IN NYLON BAGS				
Backset 60 mm one throw	**704602S**	1	10	10
Backset 70 mm two throws	**704702S**	1	10	10
Backset 80 mm two throws	**704802S**	1	10	10
Lock for metal frames. LATERAL LOCKING. Operating with oval cylinder. Zinc-plated case H 44. Zinc-plated front plate mm **160x14,7x3**. **DEADBOLT WITH mm 9 THROW WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. Cylinder fixing screw. **PACKED IN NYLON BAGS.**				
Backset 70 mm two throws	**704705S**	1	10	10
Backset 80 mm two throws	**704805S**	1	10	10




Lock for metal frames. LATERAL LOCKING. Operating with oval cylinder. Zinc-plated case H 44. Zinc-plated front plate mm **160x16x3**. **DEADBOLT WITH mm 9 THROW WITH BUILT-IN ADJUSTABLE ROLLER.** Latchlocking by key or handle follower mm 8. Cylinder fixing screw. **PACKED IN INDIVIDUAL BOXES.**				
Backset 70 mm two throws	**7077010**	1	10	10
Backset 80 mm two throws	**7078010**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Mortice locks
zinc-plated front plate




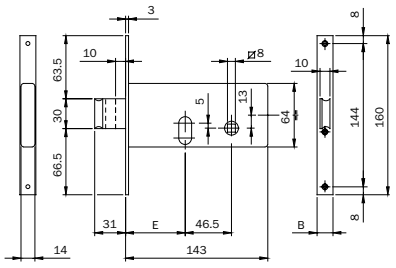

	Code	Single package	Multiple package	Min. ord.
Lock for metal frames. LATERAL LOCKING. Operating with oval cylinder. Zinc-plated case H 64. Zinc-plated front plate mm **160x16x3**. **DEADBOLT WITH TWO THROWS MM 10 WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. Cylinder fixing screw.				
Backset 60 mm	**7106010**	1	10	10
Backset 70 mm	**7107010**	1	10	10
Lock for metal frames. LATERAL LOCKING. Operating with oval cylinder. Zinc-plated case H 64. Zinc-plated front plate mm **160x16x3**. **DEADBOLT WITH TWO THROWS MM 10 WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. Cylinder fixing screw.				
Backset 60 mm	**7106020**	1	10	10
Backset 70 mm	**7107020**	1	10	10



Key blank
020159

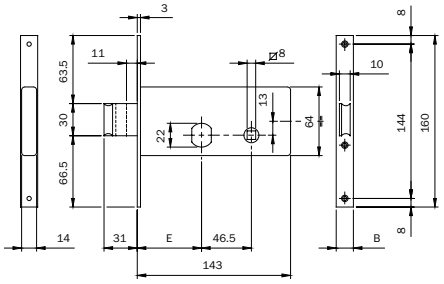


	Code	Single package	Multiple package	Min. ord.
Lock for metal frames. LATERAL LOCKING. Operating with **MULTI-FACETED ROUND CYLINDER Ø 22** (840027277) supplied with the lock. 3 KEYS. Zinc-plated case H 64 . Zinc-plated front plate mm **160x16x3**. **DEADBOLT WITH TWO THROWS mm 10 WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. 2 nylon escutcheons. Cylinder fixing screw. (Key blank ref. 020159)				
Backset 60 mm	**712601**	1	10	10
Backset 70 mm	**712701**	1	10	10
Lock for metal frames. LATERAL LOCKING. Operating with **MULTI-FACETED ROUND CYLINDER Ø 22** (840027277) supplied with the lock. 3 keys. Zinc-plated case H 64. Zinc-plated front plate mm **160x20x3**. **DEADBOLT WITH TWO THROWS mm 10 WITH BUILT-IN LATCHBOLT.** Latchlocking by key or handle follower mm 8. 2 nylon escutcheons. Cylinder fixing screw. (Key blank ref. 020159)				
Backset mm 60	**712602**	1	10	10
Backset mm 70	**712702**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Mortice locks
zinc-plated front plate




Key blank
020159

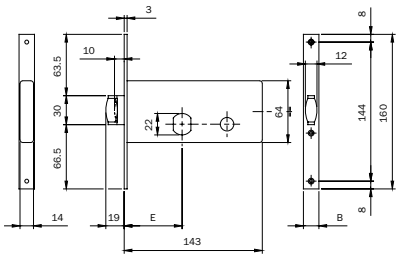


Lock for metal frames. LATERAL LOCKING. Operating with **MULTI-FACETED ROUND CYLINDER Ø 22** (840027277) supplied with the lock.
3 KEYS. Zinc-plated case H 64.
ONE THROW MM 10 WITH BUILT-IN ADJUSTABLE ROLLER.
2 nylon escutcheons. Cylinder fixing screw. (Key blank ref. 020159)

	Code	Single package	Multiple package	Min. ord.
Backset mm 60 front plate 16x3mm	**713601**	1	10	10
Backset mm 70 front plate 20x3mm	**713602**	1	10	10





Key blank
020259

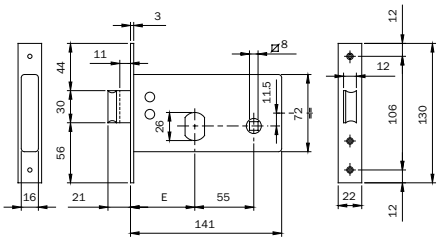

Lock for metal frames. LATERAL LOCKING. Operating with **MULTI-FACETED ROUND CYLINDER Ø 26** (842028287) supplied with the lock. 3 keys. Zinc-plated case H 72. Zinc-plated front plate mm **130x22x3**
DEADBOLT WITH THROW mm 11 WITH BUILT-IN LATCHBOLT.
2 escutcheons. Cylinder fixing screw. (Key blank ref. 020259)

	Code	Single package	Multiple package	Min. ord.
Backset mm 60	**725600**	1	10	10



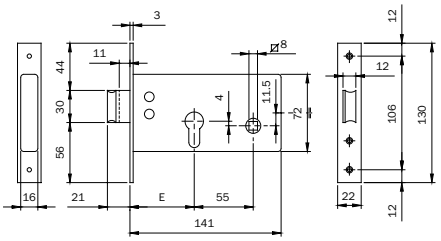

Lock for metal frames. LATERAL LOCKING. Operating with European profile cylinder.
Zinc-plated case H 72. Zinc-plated front plate mm **130x22x3**.
DEADBOLT WITH THROW mm 11 WITH BUILT-IN LATCHBOLT.
Latchlocking by key or handle follower mm 8. Cylinder fixing screw.

	Code	Single package	Multiple package	Min. ord.
Backset mm 60	**720600**	1	10	10



Locks for gates and shutters

SERIE 5 Electric rim lock

The 5 Series electric rim lock replacing the current 2001 electric lock range offers even better performance while drastically reducing the number of product codes to select from and keep in stock. The new lock makes it possible to achieve exactly the same number of variants and solutions offered by the former range of 148 conventional electric locks with just 12 new product codes. This significantly reduces stock costs for the entire distribution network, ensures that the product needed for any application is always available and eliminates the need for on-site inspections before installation to determine the type of lock needed.

Main features

- The 5 Series boasts a modern design.

- The 5 Series features adjustable backset (with a choice of 50, 60, 70 or 80 mm) across the entire range.

- The 5 Series is reversible - the lock can be inverted and transformed from right handed to left handed configuration with just a few simple settings. All models in the range are reversible with the exception of the 53N latchbolt and deadbolt version, which is available in either right handed or left handed configuration.

- The 5 Series is multi-functional - on all articles in the range, the internal control may be configured for key only, key and button or button only operation with a simple setting.

- The 5 Series also includes the Universal special electric lock, which comes with a set of accessories allowing the lock to be installed with equal ease on metal gates or wooden main entrance doors.

Finishes


- Locks and keeps with Iseo marbled grey paint finish
- Locks and keeps in stainless steel



ISEO
ULTIMATE ACCESS TECHNOLOGIES

Serie 5



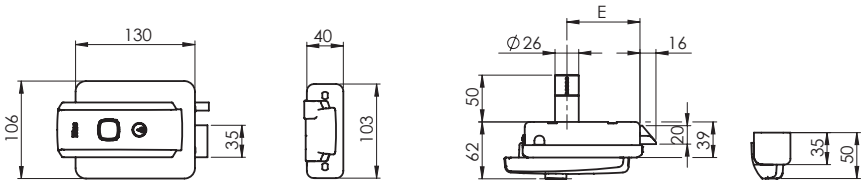




Key blank
020259

Electric rim lock in **stainless steel, latchbolt only version**, 12Vac, 15W, 1,25A. **Adjustable backset** 50, 60, 70, 80 mm. **Reversible**, without predefined right/left hand configuration. **Multifunctional**, internal control configurable for key only, key and button or button only operation. **Self-locking** latchbolt. Adjustable keep with **anti-friction slide** plate. Selectable hold-open function. Vertical play between lock and keep +/- 7mm. Separate charge piston with adjustable spring action force. Fixed cylinder, external diameter 26x50mm. **Material included**: Keep. 3 keys (blank key product code 020259). Fastener screws. Rright handed, backset 70. **Accessories to be ordered separately**: Protective lock cover and keep plate art. 052012 **REPLACES PRODUCT CODES 520010**2 - 520020**2 - 520310**2 - 520320**2**

Code	Single package	Multiple package	Min. ord.
Adjustable backset mm 50 - 60 - 70 - 80 **52N012**	1	6	6



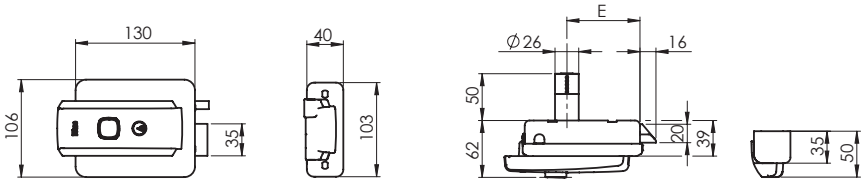



Key blank
020259


Electric rim lock, **latchbolt only version, UNIVERSAL**, 12Vac, 15W, 1,25A. Installable on **metal gates and/or wooden main entrance doors. Adjustable backset** 50, 60, 70, 80 mm. **Reversible**, without predefined right/left hand configuration. **Multifunctional**, internal control configurable for key only, key and button or button only operation. **Self-locking** latchbolt. Adjustable keep with **anti-friction slide** plate. Selectable hold-open function. Vertical play between lock and keep +/- 7mm. Separate charge piston with adjustable spring action force. Fixed cylinder, external diameter 26x50mm. Iseo marbled grey paint finish. **Material included**: Keep. 3 keys (blank key product code 020259). **Kit with adapters for separate external cylinder and keep**. Fastener screws. Instructions.Standard factory configuration: right handed, backset 70. **Accessories to be ordered separately**: Protective lock cover and keep plate art. 050012 **REPLACES PRODUCT CODES 520010**5 - 520020**5 - 520110**5 - 520120**5 - 520310**5 - 520320**5 - 521010**5 - 521020**5 - 521110**5 - 521120**5 - 521310**5 - 521320**5**

Code	Single package	Multiple package	Min. ord.
Adjustable backset mm 50 - 60 - 70 - 80 **52N005**	1	6	6

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Serie 5



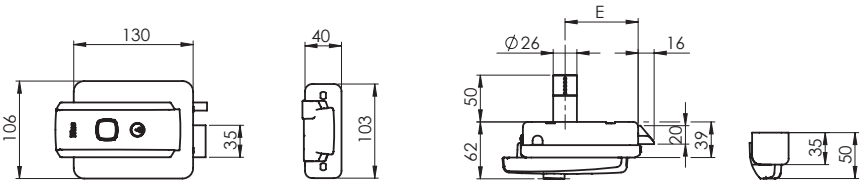




Key blank 020259

Electric rim lock, **latchbolt only version**, 12Vac, 15W, 1,25A. **Adjustable backset** 50, 60, 70, 80 mm.
Reversible, without predefined right/left hand configuration. **Multifunctional**, internal control configurable for key only, key and button or button only operation. **Self-locking** latchbolt. Adjustable keep with **anti-friction slide** plate.
Selectable hold-open function. Vertical play between lock and keep +/- 7mm.
Separate charge piston with adjustable spring action force. Fixed cylinder, external diameter 26x50mm.
Iseo marbled grey paint finish.
Material included: Keep. 3 keys (blank key product code 020259). Fastener screws. Instructions.
configuration: right handed, backset 70.
Accessories to be ordered separately: Protective lock cover and keep plate art. 050012
REPLACES PRODUCT CODES 5200105 - 520020**5 - 520110**5 - 520120**5**
5203105 - 520320**5**

	Code	Single package	Multiple package	Min. ord.
Adjustable backset mm 50 - 60 - 70 - 80	**52N015**	1	6	6



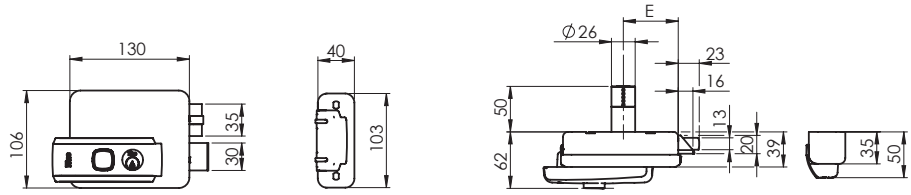





Key blank 020259

Electric rim lock, **latchbolt and deadbolt** version, 12Vac, 15W, 1,25A.
Adjustable backset 50, 60, 70, 80 mm. **Multifunctional**, internal control configurable for key only, key and button or button only operation. **Self-locking** latchbolt. Adjustable keep with **anti-friction slide** plate.
Vertical play between lock and keep +/- 2,5 mm. Charge piston with adjustable spring action force.
Fixed cylinder, external diameter 26x50mm. Iseo marbled grey paint finish.
Material included: Keep. 3 keys (blank key product code 020259). Fastener screws. Instructions.
Standard factory configuration: right handed, backset 60.
Accessories to be ordered separately: Protective lock cover and keep plate art. 050012
REPLACES PRODUCT CODES Right handed 5300105 - 530210**5 / Left handed 530020**5 - 530220**5**

	Code	Single package	Multiple package	Min. ord.
Adjustable backset mm 50 - 60 - 70 - 80 **Right**	**53N0151**	1	6	6
Adjustable backset mm 50 - 60 - 70 - 80 **Left**	**53N0152**	1	6	6

Serie 5 Electric rim lock



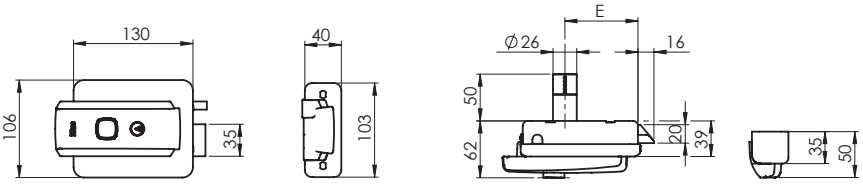





Key blank 020259

Code | Single package | Multiple package | Min. ord.

Electric rim lock, **latchbolt only** version, 12Vac, 15W, 1,25A.
Adjustable backset 50, 60, 70, 80 mm. **Multifunctional**, internal control configurable for key only, key and button or button only operation. **Self-locking** latchbolt. Adjustable keep with **anti-friction slide** plate. Selectable hold-open function. Vertical play between lock and keep +/- 7mm.
Separate charge piston with adjustable spring action force. Fixed cylinder, external diameter 26x50mm Iseo marbled grey paint finish.
Material included: **Protective lock cover and keep plate**. Keep. keys (blank key product code 020259). Fastener screws. Instructions.
Standard factory configuration: right handed, backset 70.
REPLACES PRODUCT CODES 5250105 - 525020**5 - 525310**5 - 525320**5**

Adjustable backset mm 50 - 60 - 70 - 80	**52N515**	1	6	6



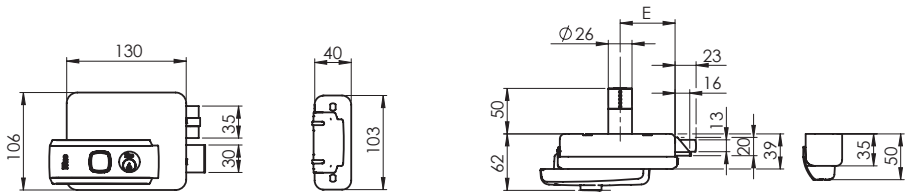





Key blank 020259


Electric rim lock, **latchbolt and deadbolt** version, 12Vac, 15W, 1,25A.
Adjustable backset 50, 60, 70, 80 mm. **Multifunctional**, internal control configurable for key only, key and button or button only operation. **Self-locking** latchbolt. Adjustable keep with **anti-friction slide** plate.
Vertical play between lock and keep +/- 2,5mm. Charge piston with adjustable spring action force.
Fixed cylinder, external diameter 26x50mm. Iseo marbled grey paint finish.
Material included: **Protective lock cover and keep plate**. Keep.
3 keys (blank key product code 020259). Fastener screws. Instructions.
Standard factory configuration: right handed, backset 60
Accessories to be ordered separately: Protective lock cover and keep plate art. 050012
REPLACES PRODUCT CODES Destre 5350105 - 535210**5 / Sinistre 535020**5 - 535220**5**

Adjustable backset mm 50 - 60 - 70 - 80 **RIGHT**	**53N5151**	1	6	6
Adjustable backset mm 50 - 60 - 70 - 80 **LEFT**	**53N5152**	1	6	6

Serie 5 Electric rim lock



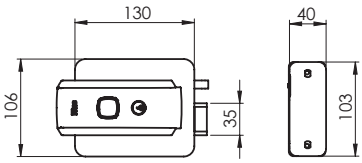

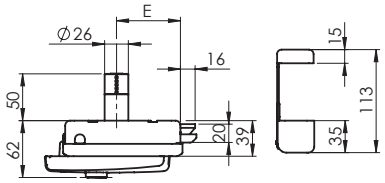









Key blank 020259

OUTSIDE OPENING

Electric rim lock, **latchbolt only version with external opening** version**,** 12Vac, 15W, 1,25A.
Adjustable backset 50, 60, 70, 80 mm. **Reversible**, without predefined right/left hand configuration. **Multifunctional**, internal control configurable for key only, key and button or button only operation. Self-locking latchbolt. Selectable hold-open function
Vertical play between lock and keep +/- 5mm. Separate charge piston with adjustable spring action force.
Fixed cylinder, external diameter 26x50mm. Iseo marbled grey paint finish.
Material included: Keep. Nylon slider with fastener plate. 3 keys (blank key product code 020259).
Fastener screws. Instructions. Standard factory configuration: right handed, backset 70.
REPLACES PRODUCT 5100105 - 510020**5 - 510310**5 - 510320**5**

	Code	Single package	Multiple package	Min. ord.
Adjustable backset mm 50 - 60 - 70 - 80	**51N015**	1	6	6


Serie 5 Accessories

	Code	Single package	Multiple package	Min. ord.
 UNIVERSAL kit for metal/wood. Accessories for installation of 52N* series lock on metal gates and/or wooden main entrance doors. Max. door thickness 85 mm	**050160**	12	-	12
 UV resistant polycarbonate cover for 52N* series handle Material included: Cylinder cover button	**050161**	12	-	12
 Pair of coils 12Vac 15W serie 51N*-52N*-53N*	**050035**	6	-	6
 Support for right/left-hand electric locks series 51N*-52N*-53N*. Zinc plated protective lock cover and keep plate. Screws.	**050012**	6	-	6
 Support for right/left-hand electric locks INOX art. 52N012 Stainless steel protective lock cover and keep plate. Screws.	**052012**	6	-	6
 Keep in marbled grey finish for latchbolt only version. Right/left handed. For 52N* series	**050153**	12	-	12
Stainless steel keep for latchbolt only version. Right/left handed. For art. 52N012	**050154**	12	-	12
 Keep in marbled grey finish for latchbolt and deadbolt version. For 53N* series Right	**050156**	12	-	12
 Left	**050157**	12	-	12

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Elettrica 500



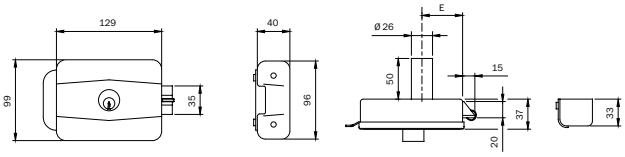




Key blank
020259

RIGHT- OR LEFT-HAND electric rim lock, painted. **12Vac 15W**. Internal cylinder and external fixed cylinder Ø 26x50.
Self-locking latchbolt. Built-in loading spring with adjustable force. 3 KEYS. Adjustable keep.
Escutcheon. Instruction sheet. (Key blank ref. 020259).
Accessories to be ordered separately:
Lock backplate and keep plate ref. 050010

Backset mm 50	**500500**	1	10	10
Backset mm 60	**500600**	1	10	10
Backset mm 70	**500700**	1	10	10
Backset mm 80	**500800**	1	10	10



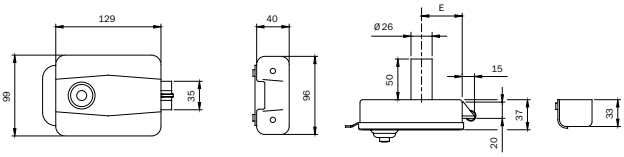




Key blank
020259

RIGHT- OR LEFT-HAND electric rim lock, painted. **12Vac 15W**. Internal pushbutton and external fixed cylinder Ø 26x50.
Self-locking latchbolt. Built-in loading spring with adjustable force. 3 KEYS. Adjustable keep.
Escutcheon. Instruction sheet. (Key blank ref. 020259).

Backset mm 50	**510500**	1	10	10
Backset mm 60	**510600**	1	10	10
Backset mm 70	**510700**	1	10	10
Backset mm 80	**510800**	1	10	10



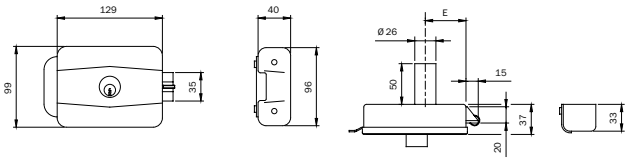




Key blank
020259


RIGHT- OR LEFT-HAND electric rim lock, zinc-plated for iron frames. **12Vac 15W**.
Internal pushbutton and external fixed cylinder Ø 26x50.
Self-locking latchbolt. Built-in loading spring with adjustable force. 3 KEYS. Adjustable keep.
Lock plate and keep plate. Escutcheon. Instruction sheet. (Key blank ref. 020259).

Backset mm 50	**505504**	1	10	10
Backset mm 60	**505604**	1	10	10
Backset mm 70	**505704**	1	10	10
Backset mm 80	**505804**	1	10	10

■ = Discontinued

Locks for sliding doors and gates




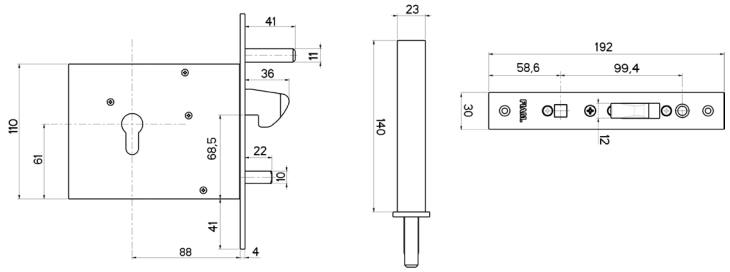



381 EGI Electric mortice lock, hook in steel, nickel-plated,
8-12V, Front plate in steel, zinc-plated
Supplied with cylinder Ref. F20930307N F3

	Code	Single package	Multiple package	Min. ord.
Backset mm 90	**0000003819000**	1	-	1




Set of solenoid units
Voltage 12V - 15W A.C.
For item EGI 381

	Code	Single package	Multiple package	Min. ord.
	5860003810000	6	-	6


Ferroglietto


	Code	Single package	Multiple package	Min. ord.






Key blank 020259






Rim lock for iron frames with knob to unlock the internal deadbolt and external fixed cylinder
Ø mm 26x50, 3 KEYS. **6-THROW DEADBOLT.**
Packed in nylon bags. (Key blank ref. 020259)


Backset mm 50	**315506**	1	10	10
Backset mm 60	**315606**	1	10	10






Key blank 020259






Rim lock for iron frames with knob to unlock the internal deadbolt and external fixed cylinder
Ø mm 26x50, 3 KEYS. **5-THROW DEADBOLT + BUILT-IN LATCHBOLT**.
Packed in nylon bags. (Key blank ref. 020259)


Backset mm 50	**315505**	1	10	10
Backset mm 60	**315605**	1	10	10






Key blank 020259






Rim lock for iron frames with knob to unlock the internal deadbolt and external fixed cylinder
Ø mm 26x50, 3 KEYS. **6-THROW DEADBOLT.**
Keep. (Key blank ref. 020259)


Backset mm 50	**310604500**	1	10	10
Backset mm 60	**310604600**	1	10	10





Key blank 020259





Rim lock for iron frames with knob to unlock the internal deadbolt and external fixed cylinder
Ø mm 26x50, 3 KEYS. **5-THROW DEADBOLT + BUILT-IN LATCHBOLT**.
Keep (Key blank ref. 020259)


Backset mm 50	**310504500**	1	10	10
Backset mm 60	**310504600**	1	10	10

Portoncino





Key blank
020259

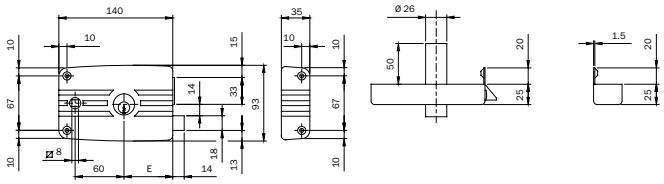


Rim lock for iron frames with blade, PAINTED BLACK, with internal cylinder and external fixed cylinder Ø mm 26x50, separate latchbolt, handle follower mm 8. 3-throw DEADBOLT. Backset mm 60. 3 KEYS. Keep. Escutcheon. (Key blank ref. 020259)

	Code	Single package	Multiple package	Min. ord.
Backset mm 60 RIGHT	**481603**	2	10	10
Backset mm 60 LEFT	**482603**	2	10	10





Key blank
020259

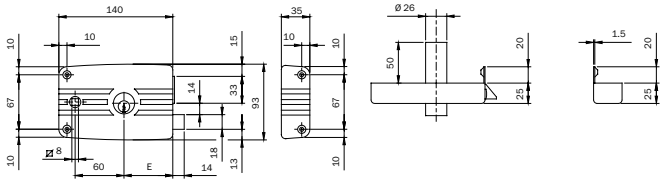


Rim lock for iron frames with blade, ZINC-PLATED, with internal cylinder and external fixed cylinder Ø mm 26x50, separate latchbolt, handle follower mm 8. 3-throw DEADBOLT. Backset mm 60. 3 KEYS. Keep. Escutcheon. (Key blank ref. 020259)

	Code	Single package	Multiple package	Min. ord.
Backset mm 60 RIGHT	**481604**	2	10	10
Backset mm 60 LEFT	**482604**	2	10	10





Key blank
020259

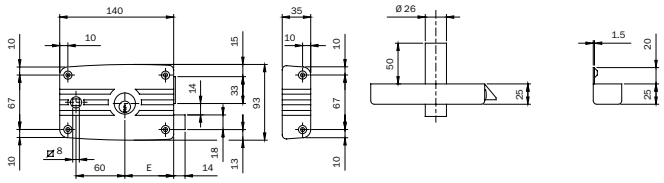

Rim lock for iron frames without blade, PAINTED BLACK, with internal cylinder and external fixed cylinder Ø mm 26x50, separate latchbolt, handle follower mm 8. 3-throw DEADBOLT. Backset mm 60. 3 KEYS. Keep. Escutcheon. (Key blank ref. 020259)

Accessories to be ordered separately:

Lock backplate and keep plate ref. 050011


	Code	Single package	Multiple package	Min. ord.
Backset mm 60 RIGHT	**485603**	2	10	10
Backset mm 60 LEFT	**486603**	2	10	10

Portoncino





Key blank
020259

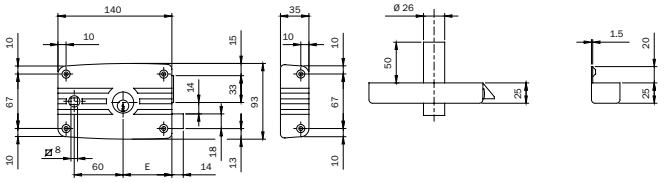

	Code		Single package	Multiple package	Min. ord.

Rim lock for iron frames without blade, ZINC-PLATED, with internal cylinder and external fixed cylinder Ø mm 26x50, separate latchbolt, HANDLE FOLLOWER mm 8. 3-throw DEADBOLT. Backset mm 60. 3 keys. Keep. Escutcheon. (Key blank ref. 020259)

Accessories to be ordered separately:


Lock backplate and keep plate ref. 050011

Backset mm 60 RIGHT	**485604**		2	10	10
Backset mm 60 LEFT	**486604**		2	10	10





Key blank
02025

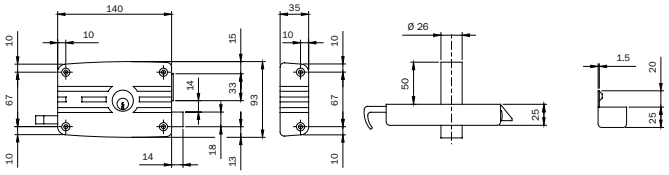

Rim lock for iron frames without blade, **RIGHT-HAND**. 4 fixing holes. Internal cylinder and external fixed cylinder Ø mm 26x50, separate reversible latchbolt with INTERNAL ROD and external latchlocking by key. 3-throw DEADBOLT. 3 KEYS. Keep. (Key blank ref. 020259)

Accessories to be ordered separately:

Lock backplate and keep plate ref. 050011

Backset mm 60 RIGHT	**431604...4**		2	10	10
Backset mm 70 RIGHT	**431704...4**		2	10	10

Rim lock for iron frames without blade, **LEFT-HAND**. 4 fixing holes. Internal cylinder and external fixed cylinder Ø mm 26x50, separate reversible latchbolt with INTERNAL ROD and external latchlocking by key. 3-throw DEADBOLT. 3 KEYS. Keep. (Key blank ref. 020259)


Accessories to be ordered separately:

Lock backplate and keep plate ref. 050011

Backset mm 60 LEFT	**432604...4**		2	10	10
Backset mm 70 LEFT	**432704...4**		2	10	10

Locks for iron frames
zinc-plated front plate mm 25



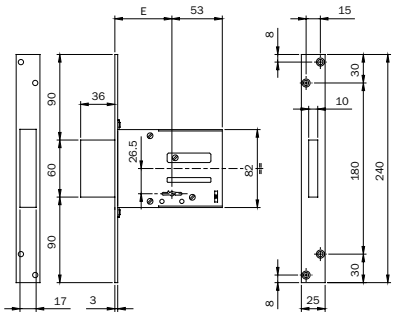

Locks for iron frames and gates. LATERAL LOCKING. Double-bit key. Zinc-plated case.
Zinc-plated front plate mm **240x25x3**. Rectangular DEADBOLT with 4 throws mm 9.
2 KEYS. (Key blank ref. 990802) 2 zinc-plated key guides.
PACKED IN NYLON BAGS.
Accessories to be ordered separately:
Zinc-plated striking plate - ref. 990817


	Code	Single package	Multiple package	Min. ord.
Backset mm 52	**661524N**	1	10	10
Backset mm 60	**661604N**	1	10	10
Backset mm 70	**661704N**	1	10	10


Locks for iron frames and gates. LATERAL LOCKING. Double-bit key. Keyed-alike version (K.A.)
in groups of 10 pieces. Zinc-plated case. Zinc-plated front plate mm **240x25x3**. Rectangular DEADBOLT
with 4 throws mm 9. 1 key. (Key blank ref. 990802). 2 zinc-plated key guides.
PACKED IN NYLON BAGS.
Accessories to be ordered separately:
Zinc-plated striking plate - ref. 990817


	Code	Single package	Multiple package	Min. ord.
Backset mm 52	**661524N.K**	1	10	10
Backset mm 60	**661604N.K**	1	10	10
Backset mm 70	**661704N.K**	1	10	10

ISEO
ULTIMATE ACCESS TECHNOLOGIES

Locks for iron frames
zinc-plated front plate mm 25



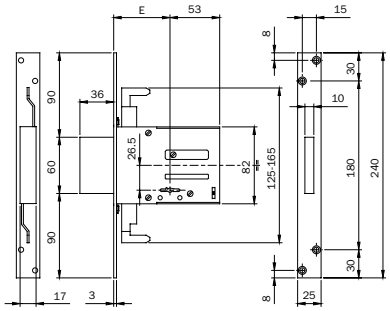



Locks for iron frames and gates. 3-POINT LOCKING for rod clutch connection. Double-bit key.
Zinc-plated case. Zinc-plated front plate mm **240x25x3**. Rectangular deadbolt with 4 throws mm 9.
2 KEYS. (Key blank ref. 990802). 2 zinc-plated key guides. **PACKED IN NYLON BAGS**.
Accessories to be ordered separately:
Screwed connection M8 for threaed rods - ref. 990823
pins, tips and rod guides for rods D8 - ref. 990837
Pair of deviated slotted internal rods D8 - ref. 990810
Pair of straight slotted internal rods D8 - ref. 990811
Zinc-plated striking plate - ref. 990817


	Code	Single package	Multiple package	Min. ord.
Backset mm 60	**663604N**	1	10	10
Backset mm 70	**663704N**	1	10	10


Locks for iron frames and gates. 3-POINT LOCKING for rod clutch connection. Double-bit key.
KEYED-ALIKE VERSION (K.A.) in groups of 10 pieces. Zinc-plated case. Zinc-plated front plate mm **240x25x3**.
Rectangular DEADBOLT with 4 throws mm 9.
1 KEY. (Key blank ref. 990802). 2 zinc-plated key guides.
PACKED IN NYLON BAGS.
Accessories to be ordered separately:
Screwed connection M8 for threaed rods - ref. 990823
Pins, tips and rod guides for rods Ø 8 - ref. 990837
Pair of deviated slotted internal rods Ø 8 - ref. 990810
Pair of straight slotted internal rods Ø 8 - ref. 990811
Zinc-plated striking plate - ref. 990817

	Code	Single package	Multiple package	Min. ord.
Backset mm 60	**663604N.K**	1	10	10
Backset mm 70	**663704N.K**	1	10	10

Locks for iron frames
zinc-plated front plate mm 25



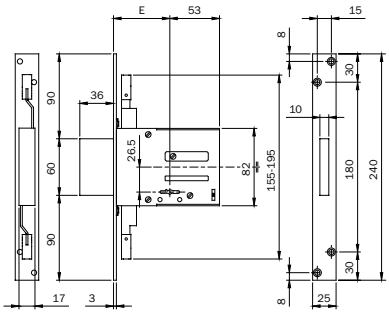




Locks for iron frames and gates. 3-POINT LOCKING, pre-assembled M8 rods connection.
Double-bit key. Zinc-plated case. Zinc-plated front plate mm **240x25x3**.
Rectangular DEADBOLT with 4 throws mm 9.
2 KEYS. (Key blank ref. 990802). 2 zinc-plated key guides.
PACKED IN NYLON BAGS.
Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod guides for rods Ø 8 - ref. 990837
Zinc-plated striking plate - ref. 99081


	Code	Single package	Multiple package	Min. ord.
Backset mm 60	**663301604**	1	10	10
Backset mm 70	**663301704**	1	10	10

Locks for iron frames and gates. 3-POINT LOCKING. Double-bit key.
KEYED-ALIKE VERSION (K.A.) in groups of 10 pieces. Zinc-plated case.
Zinc-plated front plate mm **240x25x3**. Rectangular DEADBOLT with 4 throws mm 9.
1 KEY. (Key blank ref. 990802). 2 zinc-plated key guides.
PACKED IN NYLON BAGS.
Accessories to be ordered separately:
2 tips Ø 10 for threaded rods M8 - ref. 990836
Pins, tips and rod guides for rods Ø 8 - ref. 990837
Zinc-plated striking plate - ref. 990817

	Code	Single package	Multiple package	Min. ord.
Backset mm 60	**663301604.K**	1	10	10
Backset mm 70	**663301704.K**	1	10	10

Locks for iron frames



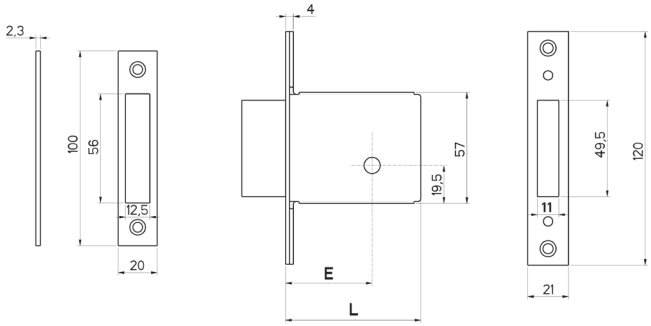


CODICE	E	L
1501.00.40	40	75
1501.00.50	50	85
1501.00.60	60	95
1501.00.70	70	105

	Code	Single package	Multiple package	Min. ord.
Mortice locks with cylinder.				
One throw, Front plate in chrome-plated steel.				
1 KA key for cross-key cylinder Ref. 0000000910175				
Backset 40	**0000015011040**	1	-	1
Backset 50	**0000015011050**	1	-	1
Backset 60	**0000015011060**	1	-	1
Backset 70	**0000015011070**	1	-	1
Mortice locks with cylinder.				
One throw, Front plate in chrome-plated steel.				
3 keys for cross-key cylinder Ref. 0000000910175				
Backset 40	**0000015010040**	1	-	1
Backset 50	**0000015010050**	1	-	1
Backset 60	**0000015010060**	1	-	1
Backset 70	**0000015010070**	1	-	1


Locks for sliding doors and gates




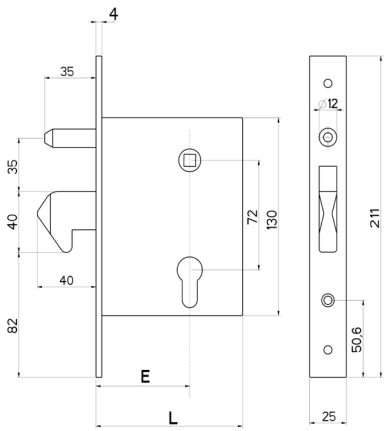

CODICE	E	L
770.00.00	50	99
770.00.60	60	100
770.00.70	70	110
770.04.00	50	99
770.04.60	60	100
770.04.70	70	110
770.01.60	60	100
770.01.70	70	110

	Code	Single package	Multiple package	Min. ord.
Mortice locks operating with European profile cylinder.				
One throw and hook bolt, Front plate in tropicalised steel.				
Supplied with cylinder Ref. F20930307N F3				
Backset 50	**0000007700000**	2	-	2
Backset 60	**0000007700060**	2	-	2
Backset 70	**0000007700070**	2	-	2
Mortice locks operating with European profile cylinder.				
One throw and hook bolt, Front plate in tropicalised steel.				
Supplied with cylinder Ref. F20930307N F3				
Industrial package.				
Backset 50	**0000007700400**	12	-	12
Backset 60	**0000007700460**	12	-	12
Backset 70	**0000007700470**	12	-	12
Mortice locks, **INOX STEEL**, operating with European profile cylinder.				
One throw and hook bolt, totally in stainless steel.				
Supplied with cylinder Ref. F20930307N F3				
Backset 60	**0000007700160**	2	-	2
Backset 70	**0000007700170**	2	-	2

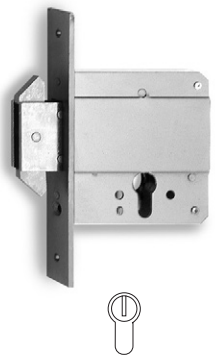


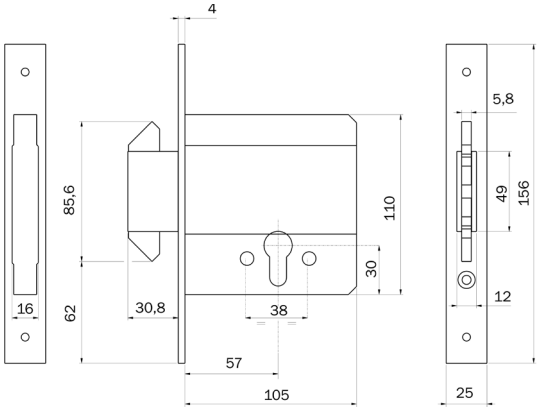

Mortice locks operating with European profile cylinder.				
Three throws, backing latch hooks, Front plate in tropicalised steel.				
Supplied with cylinder Ref. F20930307N F3				
Backset 61	**0000007780000**	2	-	2

Locks for sliding doors




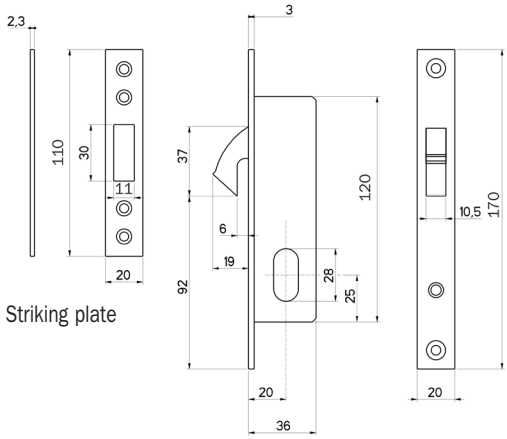

Mortice locks.
One throw, Front plate in steel, nickel-plated.
Striking plate, 3 keys, oval cylinder 27,5/27,5 mm.

	Code	Single package	Multiple package	Min. ord.
Backset 20	■ **0000050400020**	2	-	2



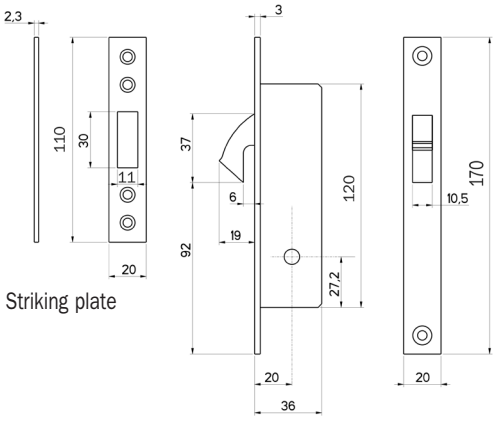


Mortice locks.
One throw, Front plate in steel, nickel-plated.
Striking plate, 3 cross-keys Ref 91.01.75.

	Code	Single package	Multiple package	Min. ord.
Backset 20	■ **0000050410020**	2	-	2


■ = Discontinued

Accessories

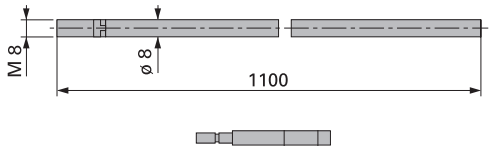


Rod, M8 threaded tips, anti-saw tips.

	Code	Single package	Multiple package	Min. ord.
Industrial package without tip	**0000099995011**	50	-	50
With anti-saw tip Ø 8 mm	**0000099990011**	10	-	10




Special rod fixing tips, to combine to connecting group code 743, 713, 711, 714, 746 series

	Code	Single package	Multiple package	Min. ord.
Industrial package without tip	**0000099995026**	50	-	50
With anti-saw tip Ø 8 mm	**0000099990026**	10	-	10




Adjustable rod, anti-saw tips.
For item 316

	Code	Single package	Multiple package	Min. ord.
	0000099990016	10	-	10



Security striking plate.
For item 1450

	Code	Single package	Multiple package	Min. ord.
	2000014010000	10	-	10




Rod tips, in cemented steel, screw-driver cut.

	Code	Single package	Multiple package	Min. ord.
Ø 10	**0000099997101**	50	-	50
Ø 12	**0000099997121**	50	-	50

	Code	Single package	Multiple package	Min. ord.


Gate locks



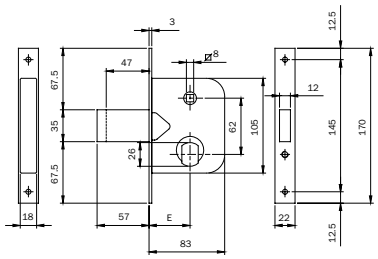


Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
EXTENDED DEADBOLT AND BUILT-IN LATCHBOLT. **1 THROW 10 mm.** Latchlocking by key or handle follower mm 8. Backset mm 45. Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder. (Key blank ref. 020259) **600450** 2 10 10



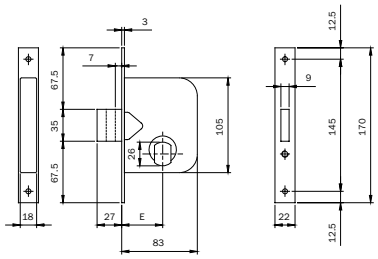


Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
2 THROWS 10 mm. Backset mm 45. Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder. (Key blank ref. 020259) **601450** 2 10 10



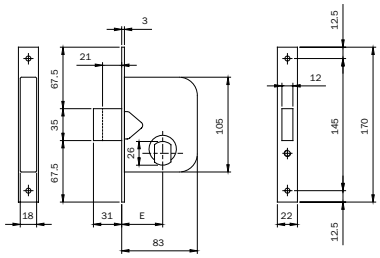


Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
1 THROW 10 mm AND BUILT-IN LATCHBOLT.
Backset mm 45. Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder. (Key blank ref. 020259) **603450** 2 10 10




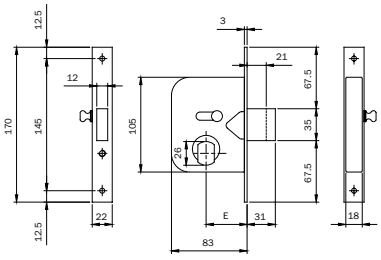

Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
Built-in latchbolt and deadbolt. **1 THROW 10 mm.** Latchlocking by key or internal knob
Backset mm 45. Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder. (Key blank ref. 020259) **604450** 2 10 10

Gate locks




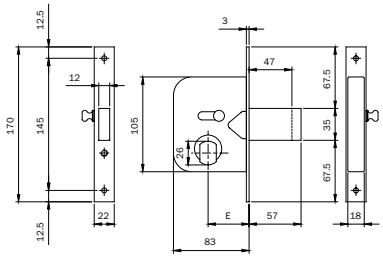

Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
EXTENDED DEADBOLT AND BUILT-IN LATCHBOLT. **1 THROW 10 mm.** Latchlocking by key or internal knob.
Supplied with cylinder 842028287 and 3 KEYS. 2 nylon escutcheons for cylinder.
(Key blank ref. 020259). Backset mm 45.


Code	Single package	Multiple package	Min. ord.
604451	2	10	10




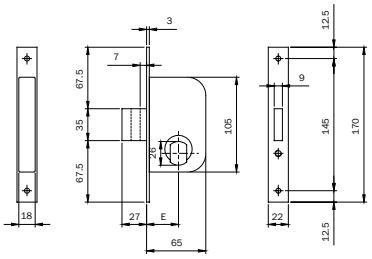

Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
1 THROW 10 mm AND BUILT-IN LATCHBOLT.
Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder. (Key blank ref. 020259). Backset mm 35.

Code	Single package	Multiple package	Min. ord.
605350	2	10	10



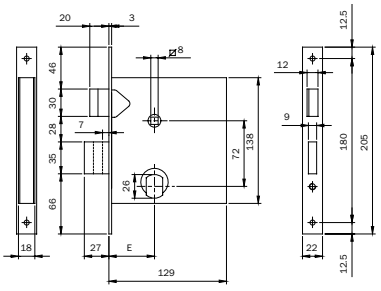



Gate lock. Tropicalised, zinc-plated square case and front plate. Operating with multi-faceted cylinder Ø mm 26.
SEPARATE LATCHBOLT AND DEADBOLT.
2 THROWS 10 mm. Latchlocking by key or handle follower mm 8.
Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder.
(Key blank ref. 020259) Backset mm 50.

Code	Single package	Multiple package	Min. ord.
610500	2	10	10

	Code	Single package	Multiple package	Min. ord.


Gate locks



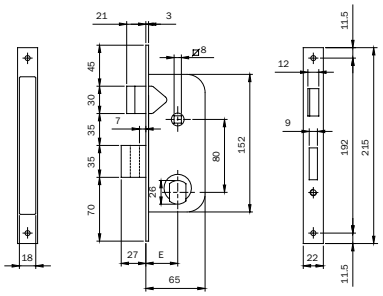

Gate lock. Tropicalised, zinc-plated case and front plate. Operating with multi-faceted cylinder Ø mm 26.
SEPARATE LATCHBOLT AND DEADBOLT. **2 THROWS 10 mm.**
Latchlocking by handle follower mm 8. Supplied with cylinder 842028287 and 3 KEYS.
2 nylon escutcheons for cylinder.
(Key blank ref. 020259). Backset mm 35. **620350** 2 10 10




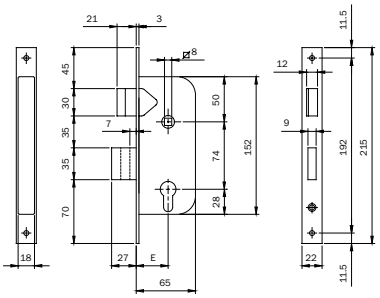

Gate lock. Tropicalised, zinc-plated case and front plate. Operating with European profile cylinder
SEPARATE LATCHBOLT AND DEADBOLT. **2 THROWS 10 mm.**
Latchlocking by handle follower mm 8.
Cylinder to be ordered separately. Backset mm 35. **630350** 2 10 10

Locks for shutters and garage doors




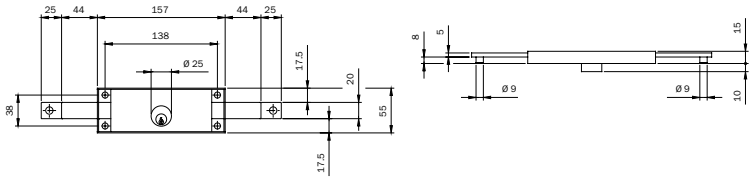

Shutter lock. Horizontal **CENTRAL** installation. Painted case. Zinc-plated deadbolts, one throw mm 25. ROD-CONNECTING PINS Ø mm 9x8. Round cylinder Ø mm 25 protruding by 10 mm from the lock case,
2 CENTRAL-PROFILE KEYS (Key blank ref. 020409).

Code	Single package	Multiple package	Min. ord.
641010	1	10	10




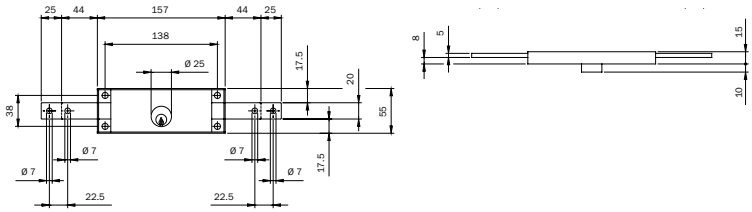

Shutter lock. Horizontal **CENTRAL** installation. Painted case. Zinc-plated deadbolts, each with 2 HOLES Ø 7 FOR RODS CONNECTION, one throw mm 25.
Round cylinder Ø mm 25 protruding by 10 mm from the lock case,
2 CENTRAL-PROFILE KEYS (Key blank ref. 020409). 2 pins.

Code	Single package	Multiple package	Min. ord.
641014	1	10	10



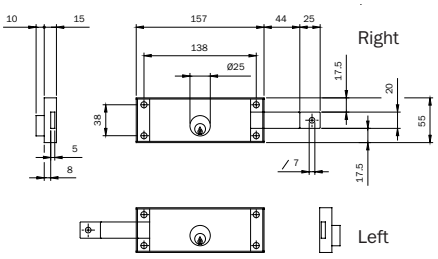


Shutter lock. Horizontal **RIGHT-HAND** installation. Painted case.
Zinc-plated deadbolts, each with 2 THREADED HOLES Ø 7 FOR RODS CONNECTION, one throw mm 25. Round cylinder Ø mm 25 protruding by 10 mm from the lock case,
2 CENTRAL-PROFILE KEYS (Key blank ref. 020409). 2 pins.

Code	Single package	Multiple package	Min. ord.
642001	2	10	10


Locks for shutters and garage doors


Code	Single package	Multiple package	Min. ord.



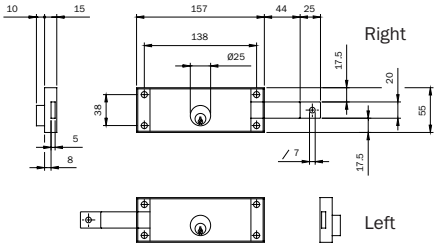


Shutter lock. **LEFT-HAND**, horizontal lateral installation. Painted case.
Zinc-plated DEADBOLT with D7 HOLE FOR RODS CONNECTION, one throw mm 25.
Round cylinder Ø mm 25 protruding by 10 mm from the lock case.
2 CENTRAL-PROFILE KEYS (Key blank ref. 020409). **642002** 2 10 10



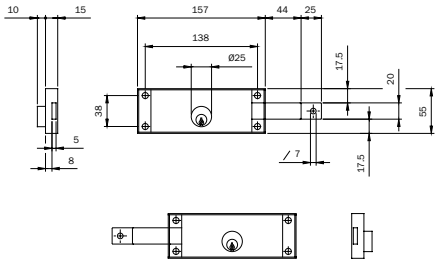

Pair of keyed-alike shutter locks. **RIGHT- AND LEFT-HAND**, horizontal lateral installation.
Painted case. Zinc-plated DEADBOLT with HOLE Ø 7 FOR RODS CONNECTION,
one throw mm 25. Round cylinder Ø mm 25 protruding by 10 mm from the lock case.
2 CENTRAL-PROFILE KEYS (Key blank ref. 020409). **642003** 1 5 5






Shutter gate. **VERTICAL** installation. Painted case. Zinc-plated DEADBOLT with PIN Ø MM 9X8
FOR ROD CONNECTION. 1 throw mm 25 with handle, handle follower mm 8, handle unlocked by
round cylinder Ø mm 25 from outside and by lever from inside. Cylinder protruding from lock case.
2 STANDARD-PROFILE KEYS (Key blank ref. 020259).
cylinder projection mm 14 **643150** 2 10 10
cylinder projection mm 30 **643300** 2 10 10

Code	Single package	Multiple package	Min. ord.

Locks for shutters and garage doors






Shutter gate. **VERTICAL** installation. Painted case. Zinc-plated DEADBOLT with M8 THREADED HOLE FOR ROD CONNECTION. 1 throw mm 25 with handle, handle follower mm 8, handle unlocked by round cylinder Ø mm 25 from outside and by lever from inside. Cylinder protruding from lock case by 14 mm
2 STANDARD-PROFILE KEYS (Key blank ref. 020259).

Code	Single package	Multiple package	Min. ord.
644150	2	10	10






Shutter gate. **VERTICAL** installation. Painted case. Zinc-plated DEADBOLT with M6 THREADED HOLE FOR ROD CONNECTION. 1 throw mm 25 with handle, handle follower mm 8, handle unlocked by round cylinder Ø mm 25 from outside and by lever from inside. Cylinder protruding from lock case by 14 mm
2 STANDARD-PROFILE KEYS (Key blank ref. 020259).
PACKED IN NYLON BAGS.

Code	Single package	Multiple package	Min. ord.
645150W	1	10	10








Shutter gate. **VERTICAL** installation. Painted case. Operating with European profile cylinder.
Zinc-plated DEADBOLT with PIN Ø MM 10X8 FOR ROD CONNECTION. 1 throw mm 25 with handle, handle follower mm 8, handle unlocked by cylinder from outside and by lever from inside.
Fixing screw for cylinder.

Code	Single package	Multiple package	Min. ord.
646000	2	10	10

Code	Single package	Multiple package	Min. ord.

Locks for shutters and garage doors








Shutter gate. **VERTICAL** installation. Painted case. Operating with European profile cylinder.
Zinc-plated DEADBOLT with M8 THREADED HOLE FOR ROD CONNECTION.
1 throw mm 25 with handle, handle follower mm 8, handle unlocked by
cylinder from outside and by lever from inside.
Fixing screw for cylinder.

647000	2	10	10



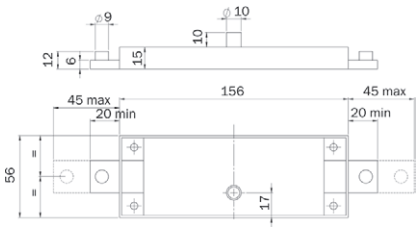

Shutter gate.
One throw, central lock.
3 keys for cross-key cylinder Ref. 0000000910175

■ **0000010910003**	2	-	2


Shutter gate.
Two throws, central.
3 keys for cross-key cylinder Ref. 0000000910110

■ **0000010910013**	2	-	2

■ = Discontinued

Multi-purpose locks




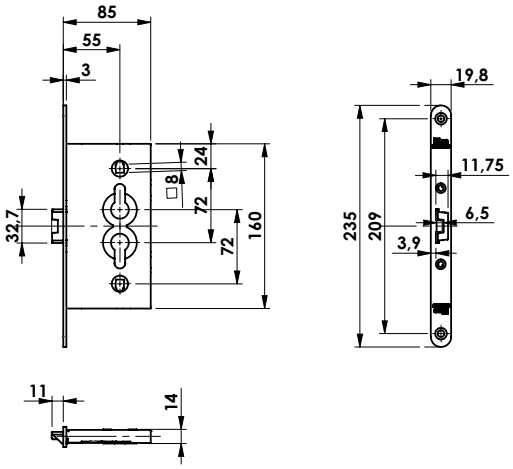

Multi-purpose mortise lock. **LATERAL** locking.
Case size mm 55. Centre distance 72. Handle follower mm 8.
Faceplate mm 19,8 x 3 x 235. Latchbolt centered (height mm 3,9).
Latchbolt mm 11 with built-in deadbolt mm 10
Latchlocking by key or handle. Key operated deadbolt.
European profiled cylinder must be ordered separately.

	Code		Single package	Multiple package	Min. ord.
Zinc plated, industrial pack format	**651201554I**	-		25	25



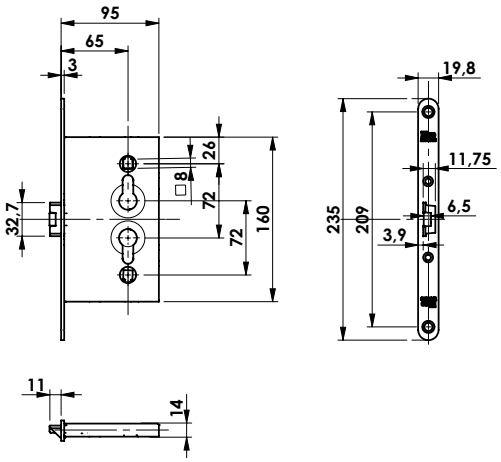


Multi-purpose mortise lock. **LATERAL** locking.
Case size mm 65. Centre distance 72. Handle follower mm 8.
Faceplate mm 19,8 x 3 x 235. Latchbolt centered (height mm 3,9).
Latchbolt mm 11 with built-in deadbolt mm 10.
Latchlocking by key or handle. Key operated deadbolt.
European profiled cylinder must be ordered separately.

	Code		Single package	Multiple package	Min. ord.
Zinc plated, industrial pack format	**651202654I**	-		25	25
RAL7035 paint finish, industrial pack format	**65120265GI**	-		25	25

Multi-purpose locks






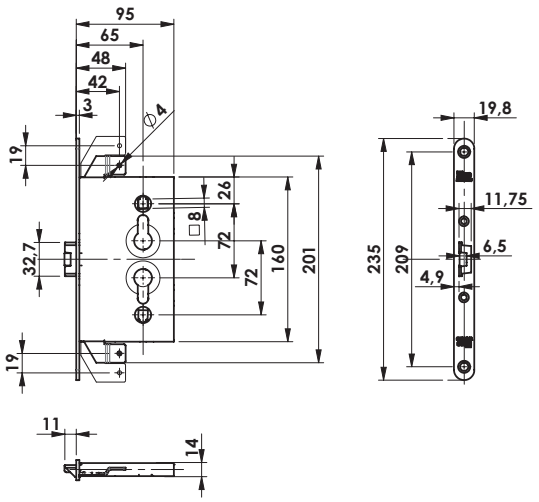


Multi-purpose mortise lock. **THREE-POINT** closure.
Case size 65 mm. Centre distance 72. Handle follower mm 8.
Faceplate mm 19,8 x 3 x 235. Rods excursion mm 19.
Decoupled latchbolt (height mm 4,9).
Latchbolt mm 11 with built-in deadbolt mm 10.
Latchlocking by key or handle. Rods operated only by handle.
Deadbolt by key only with rods outside (then the handle remains locked).
European profiled cylinder must be ordered separately.

	Code	Fe	Single package	Multiple package	Min. ord.
Zinc plated, industrial pack format	**653204654I**	-		25	25

Locks for electric cabins



***NOTE**
Knob not included
to be ordered separately
cod. A00025

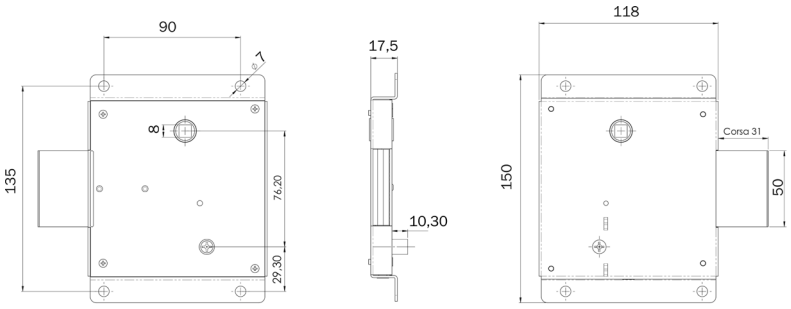


Locks for electric cabins.
Ref. DS 988-225091 (approved by Enel)
in stainless steel and brass, free key code.
On request: Zone key code or national
3 keys for cross-key cylinder Ref. 91.01.75


Code	Single package	Multiple package	Min. ord.
81.8811.31	1	-	1

Locks for electric cabins.
Ref. DS 988-225091 (approved by Enel)
Free key code.
On request: Zone key code or national
2 keys for cross-key cylinder Ref. 91.01.75
Zinc-plate steel version.

Code	Single package	Multiple package	Min. ord.
86.8811.21	1	-	1



***NOTE**
Knob not included
to be ordered separately
cod. A00025

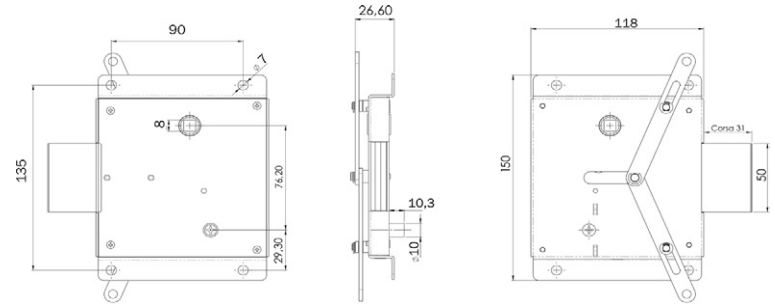


Locks for electric cabins.
Ref. DS 988-22509 (approved by Enel)
in stainless steel and brass, free key code.
On request: Zone key code or national
3 keys for cross-key cylinder Ref. 91.01.75


Code	Single package	Multiple package	Min. ord.
81.8811.33	1	-	1

Locks for electric cabins.
Ref. DS 988-22509 (approved by Enel)
Free key code.
On request: Zone key code or national
2 keys for cross-key cylinder Ref. 91.01.75
Zinc-plate steel version.

Code	Single package	Multiple package	Min. ord.
86.8811.23	1	-	1


Locks for electric cabins




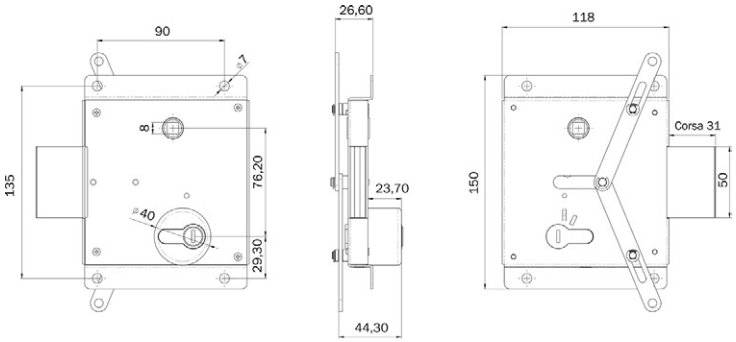

***NOTE**
Knob not included
to be ordered separately
cod. A00025

	Code	Single package	Multiple package	Min. ord.
Locks for electric cabins, operating with European profile cylinder. In stainless steel and brass (approved by Enel), free key code, 3 keys	**81.8811.33EPC**	1	-	1










Cross key cylinder, free key code or by zone 3 keys for cross-key cylinder Ref. 91.00.75 For item 8811/8811 Lateral	**8170.11.03**	10	-	10
Cross key cylinder, free key code or by zone 2 keys for cross-key cylinder Ref. 91.00.75 For item 8811/8811 Lateral	**8170.11.02**	10	-	10








Knob for electrical cabin lock with brass square handle pin For item 8811/8811 Lateral	**0000A00025**	5	-	5




Accessories

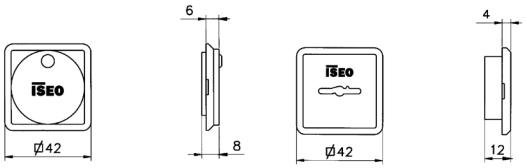	Code	Single package	Multiple package	Min. ord.
 Deadbolt with gorges, assembled, for locks for metal frames series 981-983. Three mm 79 keys.	**980000**	10	-	10
 Roller for double-bit modular lock. With nylon insert for adjustable striking plates. Spring. Spring plate.	**040820**	10	-	10
 Cap for double-bit modular locks. In nickel-plated zamak. To be fitted instead of the latchbolt for only deadbolt version. Screw.	**040830**	10	-	10
  Pair of nylon key-guides for locks series 961-963-981-983.	**990808**	30	-	30
 Pair of key-guiding escutcheons for double-bit locks. In zinc-plated steel mm 55x35. For locks series 661-663-961-963-981-983	**990846**	10	-	10
 Brass floor socket with antidust spring cap for rods. Inside hole Ø 12.	**990807**	10	-	10
 Roller nylon insert for adjustable striking plates 0386*. For locks series 78*.	**040880**	10	-	10




Accessories

	Code	Single package	Multiple package	Min. ord.
 Zinc-plated striking plate 240x25x3 for locks series 661-663-6663.	**990817**	20	-	20
 Pair of internal deviated rods. Zinc-plated tube Ø 8. For locks with clutch connections series 782-783-963-983	**990810**	1	10	10
 Pair of internal stright rods. Zinc-plated tube Ø 8. For locks with clutch connections series 782-783-963-983	**990811**	1	10	10
 D10 rod/tip-guiding upper plate in zinc-plated steel. Nylon bush.	**990816**	10	-	10
 Kit for internal deviated or straight Ø 8 with rods clutch connection. Two tips carbonitrided Ø 8. One rod connection. Two zamak rod guides. Two nylon rod guides. Two lock-fixing plates. One antidust floor socket hole Ø 12. For locks series 782-783-793-963-983.	**990827**	10	-	10
 Kit for external rods for frames with clutch connection. Two external rod-connecting plates Screws. Two lock-fixing plates. One antidust floor socket hole Ø 12. For locks series 782-783-793 Front plate with 2 holes.	**990828**	10	-	10
 Threaded connection M8 for threaded rod. For use with 3-point locks for metal frames series 663-782-783-963-983. To be used with clutch or screwed connection.	**990823**	20	-	20
 Pair of Ø 10 tips in zinc-plated steel for M8 threaded rods.	**990836**	10	-	10



Accessories

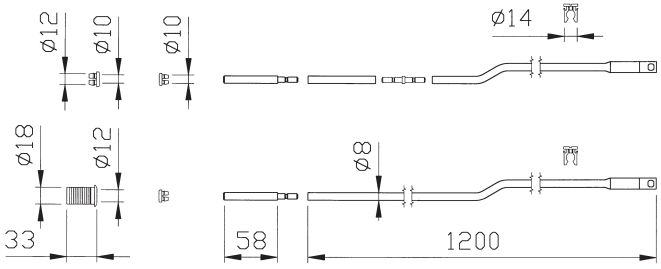	Code	Single package	Multiple package	Min. ord.
 Kit for internal straigth rods Ø 8 for use with M8 threaded connection. Two carbonitrided tips Ø 10. Two threaded pins for fixing to connection. Two rod-guiding plates with nylon bushes.	**990837**	10	-	10
   Pair of plates with pin to connect the lock or the deviators with screwd connections M4 and external rods. In zinc-plated steel.	**990853**	10	-	10
 Kit for internal straight or deviated rods Ø 8. Two tips Ø 8. One rod connection. Two zamak rod guides. Two lock-fixing plates. Screws.	**990857**	10	-	10
 Pair of internal deviated rods. Zinc-plate tube Ø 8 with slotted hole for screwed connection M4. Two tips Ø 8. Striker for nylon tip Ø 8. Two noiseproof nylon bushes. One rod connection. Two nylon rod guides. Two lock-fixing plates. One antidust floor socket hole Ø 12. For locks with rods screwed connection series 7820-783*-963*	**990850**	1	5	5






Accessories

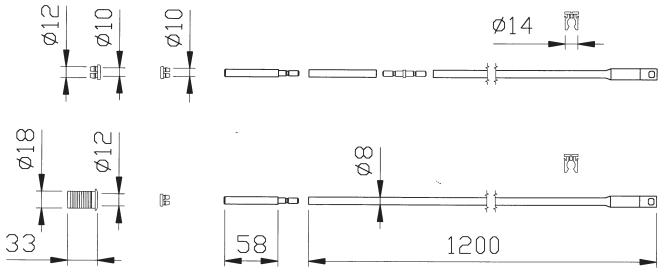	Code	Single package	Multiple package	Min. ord.
 Pair of internal straight rods. Zinc-plate tube Ø 8 with slotted hole for screwed connection M4. Two tips Ø 8. Striker for nylon tip Ø 8. Two noiseproof nylon bushes. One rod connection. Two nylon rod guides. One antidust floor socket hole Ø 12. For locks with rods screwed connection series 7820-783*-963*	**990851**	1	5	5
 Pair of front plate supports in NYLON 22x8 for locks operating with European profile cylinder for double-bit aluminium locks.	**038019**	10	-	10
 Latchbolt-guiding slide for aluminium frames for external opening. Three spacers. In nylon.	**990842**	10	-	10
 Pair of pressure electric contacts for electric locks 12V. Six spacers mm 2x22. Four spacers mm 2x16. One spacer mm 5. Instructions.	**050060**	10	-	10
 Preassembled pushbutton for electric rim locks 12V.	**050041**	1	-	1

Accessories



	Code	Single package	Multiple package	Min. ord.
 Pair of standard coils **12Vac 15W** for electric rim locks series 500-505-510	**050020**	10	-	10
 Pair of standard coils for double-bit electric locks for metal frames **12Vac 15W** series 78**-96**	**050024**	10	-	10
 Pair of standard coils **12Vac 15W** for oval-cylinder electric locks for metal frames series 550-551	**050030**	10	-	10
 Pair of standard coils **12Vac 15W** for electric rim locks series 51N*-52N*-53N*	**050035**	10	-	10
 Support for right/left-hand electric locks series 500-505-510. Lock backplate. and keep plate in zinc-plated steel. Screws.	**050010**	5	-	5
 Support for right/left-hand locks with handle follower series 481-482-485-486 and with internal zinc-plated rod 431-432. Lock backplate and keep plate in zinc-plated steel. Screws.	**050011**	5	-	5

Accessories

	Code	Single package	Multiple package	Min. ord.
 Support for right/left-hand electric locks series 51N*-52N*-53N*. Lock backplate and keep plate in zinc-plated steel. Screws.	**050012**	6	-	6
 Support for right/left-hand electric locks in stainles steel art. 52N012. Lock backplate and keep plate in STAINLESS STEEL. Screws.	**052012**	6	-	6
 Keep in STAINLESS STEEL for electric locks series art. 52N012. STAINLESS STEEL sliding plate. **CODES REPLACED BY 050154 (AMBIDEXTROUS)**				
RIGHT	■ **050108**	5	-	5
LEFT	■ **050109**	5	-	5
 Keep in grey painted steel for electric locks series 52N*. STAINLESS STEEL sliding plate. **CODES REPLACED BY 050153**				
RIGHT	■ **050112**	5	-	5
LEFT	■ **050113**	5	-	5
 Keep in STAINLESS STEEL for electric locks series 53**. STAINLESS STEEL sliding plate.				
RIGHT	■ **050128**	5	-	5
LEFT	■ **050129**	5	-	5

■ = Discontinued

Accessories

	Code	Single package	Multiple package	Min. ord.
 Keep in grey painted steel for electric locks series 530*-532*-535*. STAINLESS STEEL sliding plate. **CODES REPLACED BY 050156 (R) - 050157 (L)**				
RIGHT	■ **050132**	5	-	5
LEFT	■ **050133**	5	-	5
 Painted steel U-keep. Standard version for series 3105-3106	**035005**	10	-	10

■ = Discontinued




Match

Electric strikers

Match Radiale




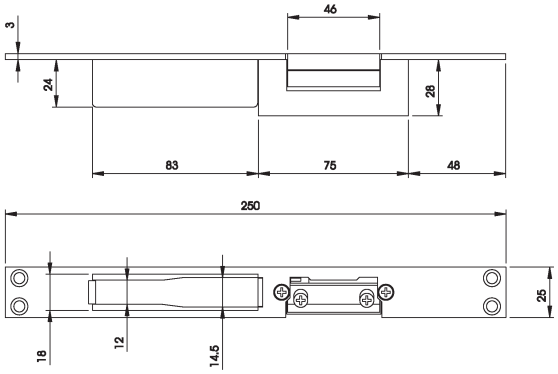

* **dc: max. power supply time 10 seconds**

	Code	Single package	Multiple package	Min. ord.
Electric striker with closed **REVERSIBLE** striking plate, satin STAINLESS STEEL, flat front plate mm 250X25X3, for locks 78*-96*7-96*9-98. Can be used with electric strikers series 0400*0 and 0401*0. **AUTOMATIC-UNLATCHING VERSION AFTER ELECTRIC PULSE,** with hold-open lever. Voltage: **6-12Vac/dc*** Absorption: da 0,5 a 1,5 A. with nylon case	**5661900**	1	6	1







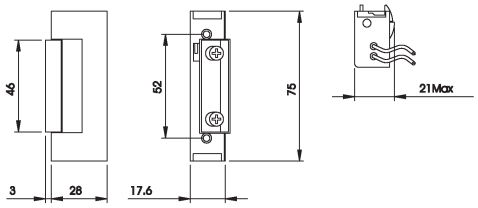

* **dc: max. power supply time 10 seconds**

Electric striker without front plate, **UNLATCHED DURING ELECTRIC PULSE ONLY,** with hold-open lever. Voltage: **6-12Vac/dc*** Absorption: 0,5 to 1,5 A. REVERSIBLE.	**040010**	1	6	6
Voltage: **24Vac/dc*** Absorption: 0,5 A. REVERSIBLE	**040050**	1	6	6
Electric striker without front plate, **UNLATCHED DURING ELECTRIC PULSE ONLY,** without hold-open lever. Voltage: **6-12Vac/dc*** Absorption: 0,5 to 1,5 A. REVERSIBLE	**040020**	1	6	6
Voltage: **24Vac/dc*** Absorption: 0,5 A. REVERSIBLE	**040060**	1	6	6
Electric striker without front plate, **PERMANENT UNLATCHING AFTER ELECTRIC PULSE** with hold-open lever. Voltage: **6-12Vac/dc*** Absorption: 0,5 to 1,5 A. REVERSIBLE	**040030**	1	6	6
Voltaggio: **24Vac/dc*** Assorbimento: 0,5 A. REVERSIBILE	**040070**	1	6	6
Electric striker without front plate, **PERMANENT UNLATCHING AFTER ELECTRIC PULSE,** without hold-open lever. Voltage: **6-12Vac/dc*** Absorption: 0,5 to 1,5 A. REVERSIBLE	**040040**	1	6	6
Voltage: **24Vac/dc*** Absorption: 0,5 A. REVERSIBLE	**040080**	1	6	6


Match Radiale

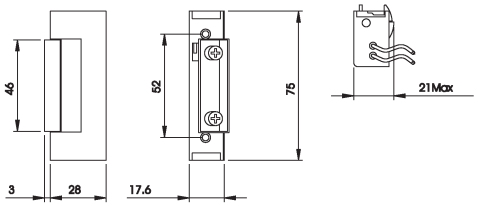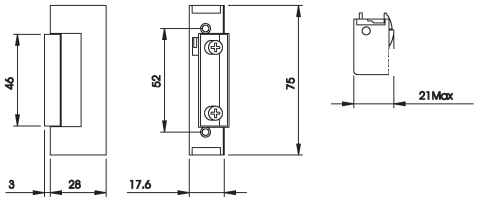	Code	Single package	Multiple package	Min. ord.
 				
Electric striker without front plate, **FAIL-SAFE VERSION.** Without hold-open lever. Voltage: **12V dc.** Absorption: 0,3A. REVERSIBLE	**040100**	1	6	6
Voltage: **24V dc.** Absorption: 0,2A. REVERSIBLE	**040110**	1	6	6
 				
MECHANICAL striker without front plate, version **WITHOUT COIL** with hold-open lever. REVERSIBLE.	**040090**	1	6	6
 				
ADJUSTABLE RIGHT-HAND electric striker for MULTIBLINDO central striking plates series 033160-033162-033173-033175. **LIMITED UNLATCHING DURING ELECTRIC PULSE ONLY.** Hold-open lever. Voltage: **12Vac 15W**	**040900**	1	10	10
 				
ADJUSTABLE LEFT-HAND electric striker for MULTIBLINDO central striking plates series 033161-033163-033174-033176. **LIMITED UNLATCHING DURING ELECTRIC PULSE ONLY.** Hold-open lever. Voltage: **12Vac 15W**	**040910**	1	10	10

Match Radiale


	Code	Single package	Multiple package	Min. ord.



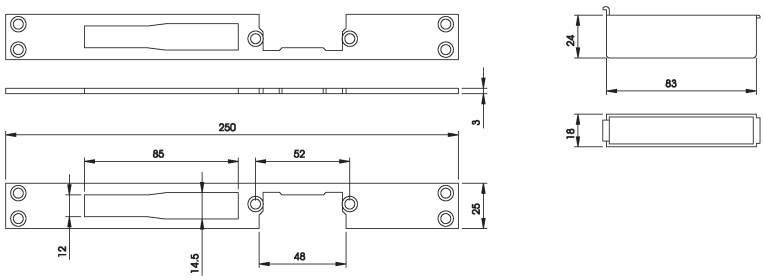


Closed **REVERSIBLE** striking plate, satin STAINLESS STEEL, flat front plate mm **250x25x3,** for locks 78*-96*7-96*9-98. Can be used with electric strikers series 0400*0 and 0401*0. With nylon case. **033190** 1 10 10



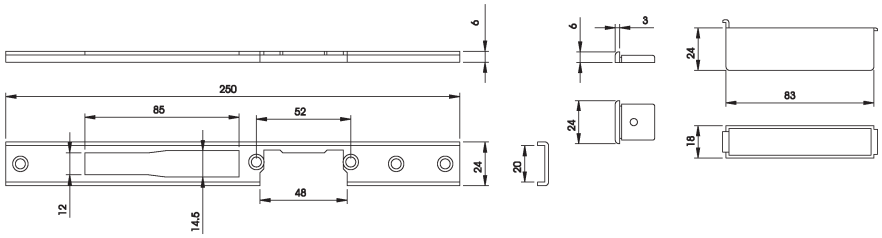


Closed **RIGHT-HAND** striking plate, satin STAINLESS STEEL, U-front plate mm **250x24x6**, for locks 78*-96*7-96*9-98. Can be used with electric strikers series 0400*0 and 0401*0. With nylon caps and case. **033194** 1 10 10



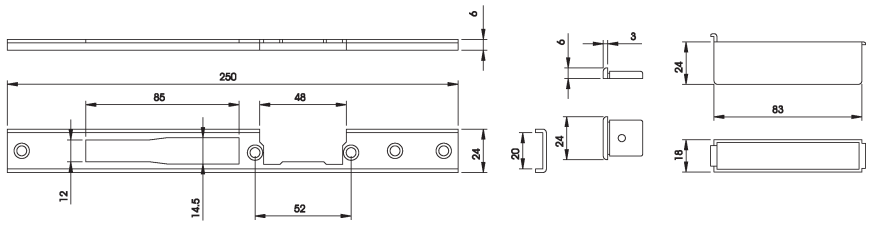

Closed **LEFT-HAND** striking plate, satin STAINLESS STEEL, U-front plate mm **250x24x6**, for locks 78*-96*7-96*9-98. Can be used with electric strikers series 0400*0 and 0401*0. With nylon caps and case. **033195** 1 10 10






REVERSIBLE striking plate in satin STAINLESS STEEL, flat front plate mm **160x25x3**, for locks with latchbolt only. Can be used with electric strikers series 0400*0 and 0401*0. **033196** 1 10 10

Match Radiale


	Code	Single package	Multiple package	Min. ord.



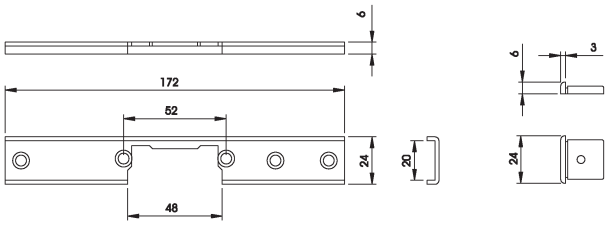


REVERSIBLE striking plate in satin STAINLESS STEEL, U-front plate mm **172x24x6**,
for locks with latchbolt only. Can be used with electric strikers series 0400*0 and 0401*0.
With cap. **033197** 1 10 10



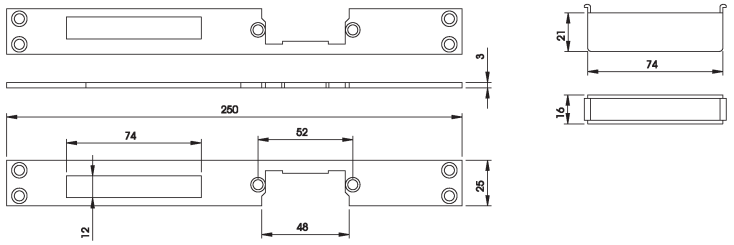


REVERSIBLE closed striking plate in satin STAINLESS STEEL, flat front plate mm **250x25x3**,
for mortice locks for wooden frames series 200-205-210-215-221-240-250-741-291.
Can be used with electric strikers series 0400*0 and 0401*0. With nylon case. **033193** 1 10 10



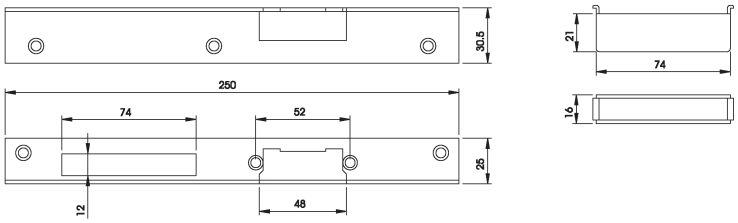

RIGHT-HAND closed angle striking plate, GOLD PAINTED steel mm **250x30,5x25**,
for mortice locks for wooden frames series 200-205-210-215-221-240-250-741-291.
Can be used with electric strikers series 0400*0 and 0401*0. With nylon case. **033191** 1 10 10



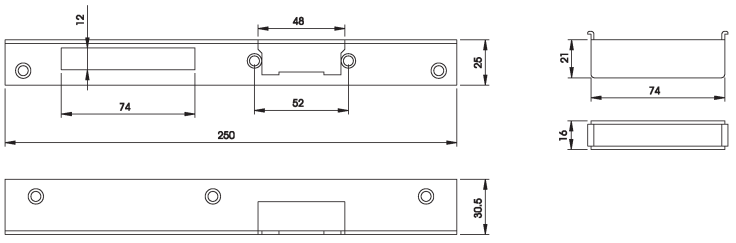


LEFT-HAND closed angle striking plate, GOLD PAINTED steel mm **250x30,5x25**,
for mortice locks for wooden frames series 200-205-210-215-221-240-250-741-291.
Can be used with electric strikers series 0400*0 and 0401*0. With nylon case. **033192** 1 10 10

Match Radiale


	Code	Single package	Multiple package	Min. ord.






Electric striker with flat front plate, STAINLESS STEEL mm **250x24x3**, **RIGHT**- OR **LEFT-HAND** USE, for mortice locks with translating latchbolt and deadbolt for aluminium frames, **PERMANENT UNLATCHING AFTER ELECTRIC PULSE**, with hold-open lever pin for automatic function. Voltage: **12Vac 15W** **5621830** 1 10 10





Electric striker with flat front plate, STAINLESS STEEL mm **160x24x3**, **RIGHT**- OR **LEFT-HAND** USE, for mortice locks for aluminium frames, **PERMANENT UNLATCHING AFTER ELECTRIC PULSE** with hold-open lever, pin for automatic function. Voltage: **12Vac 15W.** **5611830** 1 10 10






Electric striker with flat front plate, STAINLESS STEEL mm **240x24x3**, for mortice locks with tilting deadbolt and latchbolt for aluminium frames. Can be used on: FRAMES WITH INTERNAL **RIGHT-HAND** LOCK, RAIL FRAMES WITH **LEFT-HAND** INTERNAL LOCK, **PERMANENT UNLATCHING AFTER ELECTRIC PULSE,** with hold-open lever, pin for automatic function. Power supply **12Vac 15W.** **5651830** 1 10 10

Electric striker with flat front plate, STAINLESS STEEL mm **240x24x3**, for mortice locks with tilting deadbolt and latchbolt for aluminium frames. Can be used on: FRAMES WITH INTERNAL **LEFT-HAND** LOCK, RAIL FRAMES WITH **RIGHT-HAND** INTERNAL LOCK, **PERMANENT UNLATCHING AFTER ELECTRIC PULSE**, with hold-open lever, pin for automatic function. Power supply **12Vac 15W.** **5661830** 1 10 10

Match for metal frames


	Code	Single package	Multiple package	Min. ord.

Full-size scale

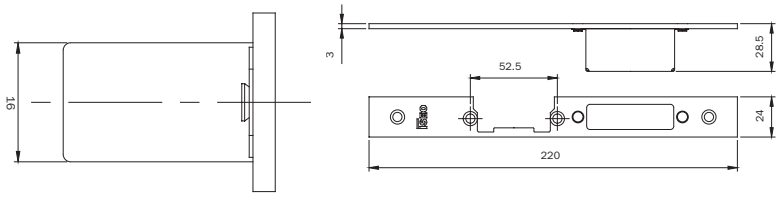


RIGHT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
Flat front plate mm **220x24x3** in STAINLESS STEEL. Can be used with striker series: 040890, 040900, 040910, 0400*0 e 0401*0. With case. **033160** 1 10 10

Full-size scale

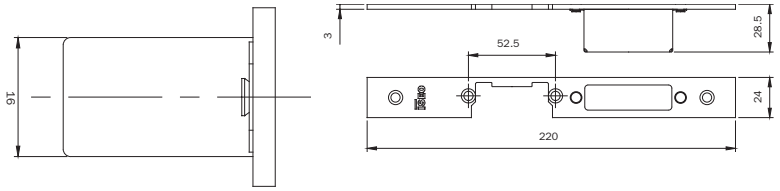


LEFT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
Flat front plate mm **220x24x3** in STAINLESS STEEL. Can be used with striker series: 040890, 040900, 040910, 0400*0 e 0401*0. With case. **033161** 1 10 10

Full-size scale

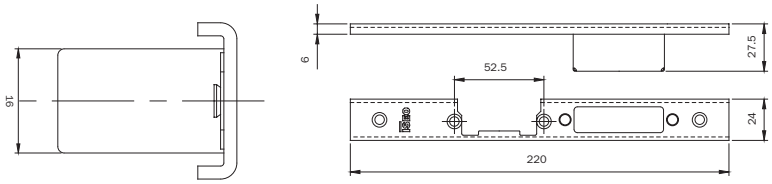

RIGHT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
U-front plate mm **220x24x6** in STAINLESS STEEL. Can be used with striker series: 040890, 040900, 040910, 0400*0 e 0401*0. With caps and case. **033162** 1 10 10

Full-size scale

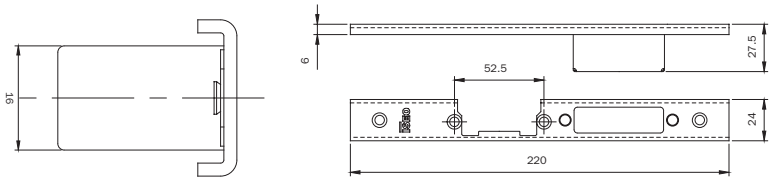


LEFT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
U-front plate mm **220x24x6** in STAINLESS STEEL. Can be used with striker series: 040890, 040900, 040910, 0400*0 and 0401*0. With caps and case. **033163** 1 10 10

Match for metal frames


	Code	Single package	Multiple package	Min. ord.

Full-size scale

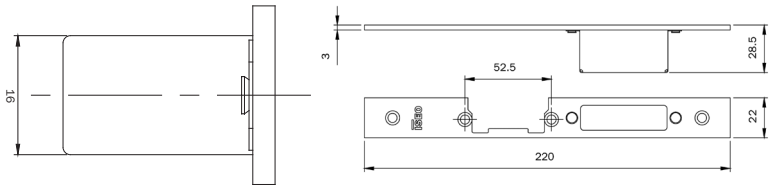


RIGHT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
Flat front plate mm **220x22x3** in STAINLESS STEEL. Can be used with strikers series: 040890, 040900, 040910, 0400*0 and 0401*0. With case. **033173** 1 10 10

Full-size scale

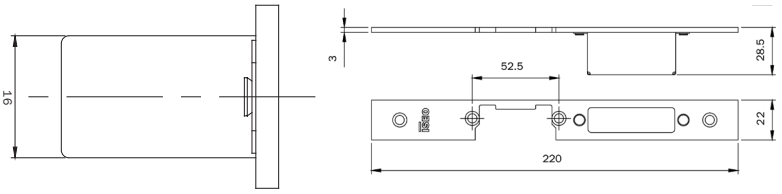


LEFT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
Flat front plate mm **220x22x3** in STAINLESS STEEL. Can be used with strikers series: 040890, 040900, 040910, 0400*0 e 0401*0. With case. **033174** 1 10 10

Full-size scale

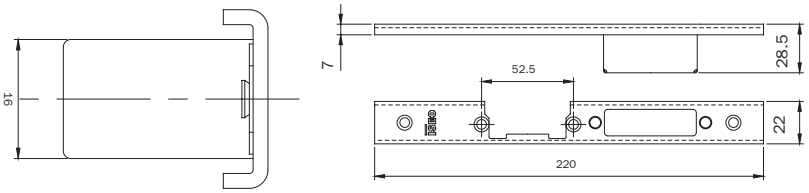

RIGHT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
U-front plate mm **220x22x7** in STAINLESS STEEL. Can be used with strikers series: 040890, 040900, 040910, 0400*0 and 0401*0. With caps and case. **033175** 1 10 10


Full-size scale

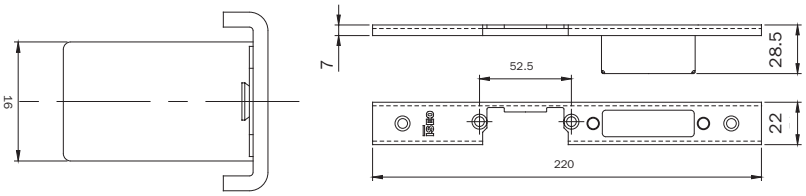


LEFT-HAND striking plate for MULTIBLINDO **CENTRAL LOCK.**
U-front plate mm **220x22x7** in STAINLESS STEEL. Can be used with strikers series: 040890, 040900, 040910, 0400*0 and 0401*0. With caps and case. **033176** 1 10 10

Striking plates for multipoint and mortice locks

Adjustable closed striking plates




Full-size scale

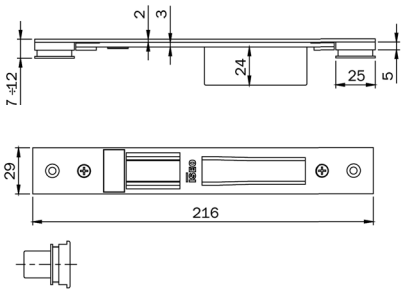


Door profile

ALCAN abithal Keeper Porta 53-60 / Abithal Keeper Porta 61-68
Abithal Porta / Winner Porta
ALCOA fb 12 Blindato / Formula F40 Porta / Formula F40 Tt Porta
Formula F50 Porta / Formula F50 Tt Porta / Formula F60 Tt Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO all.Co 5 Porta / All.Co 5 Tt Porta / Export 50 Porta
Export 50 Tt Porta / Sicurblin 65
ALNOR montreal Porta
ALU-K alublindo / N 45 Porta / N 53 Porta / N 55 Tt Porta
N 62 Tt Porta
ALU-MEC synthesis 57 Porta / Synthesis 60Tt Porta
ALUSUISSE alsec 2000 Porta 59 / Alsec 2000 Porta 69
BODEGA extrablind 70
DOMAL domal Break 52 Porta / Domal Break 70 Porta
Domal Security Porta / Domal Shops Porta / Domal Stopper Pg Porta
ESA blindal 60 Porta 1 Anta / Blindal 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / Blindal 70 Porta 2 Ante
FRESIA global 48 Porta
INDINVEST alpha 445 Porta 2 Ante
METRA nc 45 International Porta / Nc 45 Superthermic Porta
Nc 55 International Porta / Nc 68 Superthermic Porta
Nuovo Nc 50 Porta / Superblindo
NEW TEC new Tec 50 Porta Complanare
New Tec 52 Tt Porta Complanare / New Tec 68 Tt Porta Complanare
OCMA fc 60 Tt Porta / Sv 47 Porta 1 Anta / Sv 47 Porta 2 Ante
Sv 62 Porta 1 Anta / Sv 62 Porta 2 Ante / Sv 62 Tt Porta 1 Anta
Sv 62 Tt Porta 2 Ante
PASSERINI ekip Blindo / Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante / Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante / Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante / Ekip Thermo 53 Porta
PROFILATI"Pe ""Eku 53"" Porta"
"Pe ""Eku 64 Tt"" Porta"
"Pe ""Eku 72 Tt"" Porta"
SCHUCO royal 78 St Blindato / Royal S 50 N / Royal S 55 Tt
Royal S 65 Tt
WICONA I60-A / L70-A

	Code	Single package	Multiple package	Min. ord.
ADJUSTABLE closed striking plate for **CENTRAL LOCK** MULTIBLINDO, all versions, and series 78* - 79*. Material: black-painted steel. Flat front plate **216x29** with vertical adjustment from mm 7 to 12 and horizontal adjustment ± mm 2.	**0386001**	10	-	10



Full-size scale

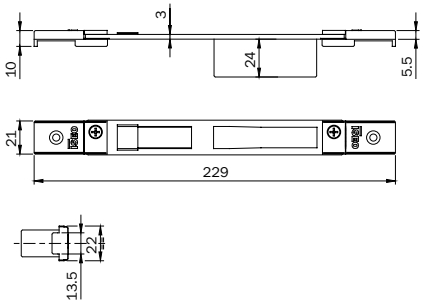

Euro groove


ALCAN abithal Cristal / Abithal Keeper Porta C.E. / Winner Finestra
ALCOA fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
ALL.CO export 40 Finestra / Export 45 Tt Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
ALU-MEC synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
ALUSUISSE alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
BODEGA bga 50 / New Bt 60
DOMAL domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
EQUIPE sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante / Sistema 8000 Tt Finestra 1 Anta
Sistema 8000 Tt Finestra 2 Ante
ESA isola Porta
ESEDRA ga 53 Porta / Tt 63 Porta / Tt 75 Porta
INDINVEST gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto / Gold 600 Complanare
Gold 600 Sormonto
METRA nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Nuovo Nc 40 Sorm. 2 Ante Con Riporto / Nuovo Nc 40 Sormonto 1 Anta
MORELLI ma 8300
OCMA fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
PASSERINI ekip 40 Evoluzione 1 Anta / Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 1 Anta / Ekip 40 Sormonto 2 Ante
Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra
Ekip Maastricht Th 68 Finestra
PROFILATI "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra" /Sistema 1 Pe 40 Comp./Est. 1 Anta
Sistema 1 Pe 40 Sormonto 1 Anta / Sistema 1 Pe 50 Comp./Est. 1 Anta
Sistema 1 Pe 50 Sormonto 1 Anta


	Code	Single package	Multiple package	Min. ord.
ADJUSTABLE closed striking plate for **CENTRAL LOCK** MULTIBLINDO, all versions, and series 78* - 79*. Material: black-painted steel. Flat front plate **229x22** with vertical adjustment through threaded plates and horizontal adjustment ± mm 9.	**0386011**	10	-	10

ISEO ULTIMATE ACCESS TECHNOLOGIES

Code | Single package | Multiple package | Min. ord.


Adjustable closed striking plates




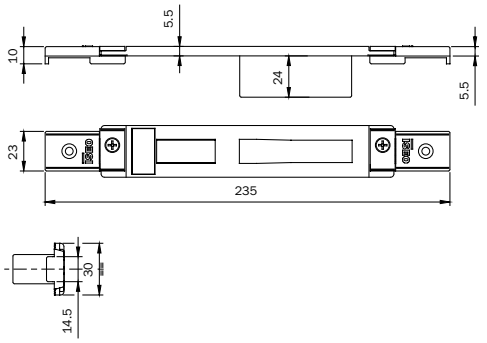

ALCOA alublind / R 40 Reversibile 1 Anta / R 40 Reversibile 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare
ALL.CO all.Co 5 Reversibile / All.Co 5 Sormonto / Ites P4 Sormonto
ALU-K n 45 Reversibile
ESA giuntall Porta
FRESIA global 41 Complanare / Global 41 Sormonto
Global 48 Complanare / Global 48 Sormonto / Global 70 Taglio Termico
METRA nuovo Nc 50 Sormonto 1 Anta / Nuovo Nc 50 Sormonto 2 Ante
New Tecnew Tec 50 Porta Sormonto / New Tec 52 Tt Porta Sormonto
New Tec 60 Tt Porta Sormonto / New Tec 68 Tt Porta Sormonto
PASSERINI ekip 50 Sormonto 1 Anta / Ekip 50 Sormonto 2 Ante


ADJUSTABLE closed striking plate for **CENTRAL LOCK**
MULTIBLINDO, all versions, and series 78* - 79*.
Material: BLACK-painted steel. Flat front plate **235x30** with horizontal adjustment ± mm 9. **0386021** 10 - 10




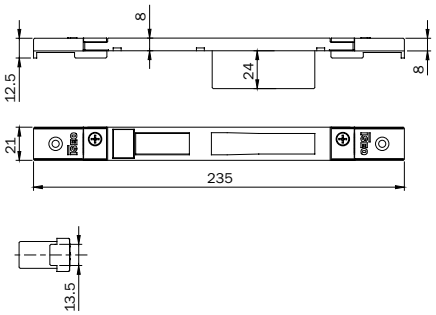

ALL.CO all.Co 5 Complanare / Ites P4 Complanare
ALNOR blindo Block / Montreal G.A.
ALU-K n 53 Complanare / N 55 Tt Complanare
ESA giuntall Complanare
INDINVEST alpha 255 Complanare / Alpha 370 Tt Complanare
Alpha 445 Finestra / Alpha 445 Porta 1 Anta
Alpha 658 Tt Complanare / Alpha Blitz 2000
Alpha Globo 45 / Alpha Globo 55
METRA nuovo Nc 40 Complanare / Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 50 Complanare
PASSERINI ekip 40 Complanare 1 Anta / Ekip 40 Complanare 2 Ante
Ekip 50 Complanare 1 Anta / Ekip 50 Complanare 2 Ante
Ekip Thermo 53 Finestra 1 Anta / Ekip Thermo 53 Finestra 2 Ante
Ekip Thermo 58 Finestra 1 Anta / Ekip Thermo 58 Finestra 2 Ante
PROFILATI sistema 1 Pe 40 Comp./Est. 2 Ante
Sistema 1 Pe 40 Sormonto 2 Ante / Sistema 1 Pe 50 Comp./
Est. 2 Ante
Sistema 1 Pe 50 Sormonto 2 Ante

ADJUSTABLE closed striking plate for **CENTRAL LOCK**
MULTIBLINDO, all versions, and series 78* - 79*.
Material: BLACK-painted steel. Flat front plate **235x21** with horizontal adjustment ± mm 9. **0386031** 10 - 10



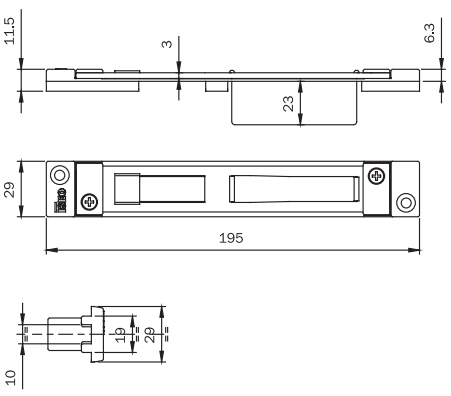


"Erre" profile


ALCOA alublind / R 40 Reversibile 1 Anta / R 40 Reversibile 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare

ADJUSTABLE closed striking plate for **CENTRAL LOCK**
MULTIBLINDO, all versions, and series 78* - 79*.
Material: BLACK-painted steel. Flat front plate **195x29** with horizontal adjustment ± mm 13. **0386041** 10 - 10

Adjustable closed striking plates

Référence | Emballage | Conditionnement multiple | Q.té min. à commander


Full-size scale

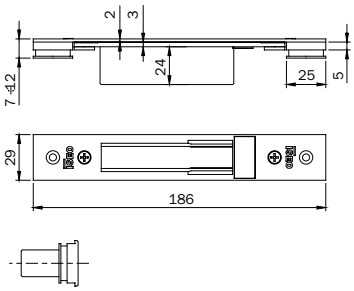



ADJUSTABLE closed striking plate for **LOCK**
WITH ONLY DEADBOLTS AND DEVIATORS MULTIBLINDO
series 78* - 96* - 98* 550 - 551 - 556 - 70* - 71* - 730*
731*. - 736 - 737. Material: BLACK-painted steed. Flat front plate
186x29 with vertical adjustment mm 7 to 12
and horizontal adjustment ± mm 2.
et en horizontale ± 2 mm.

Door profile

ALCAN abithal Keeper Porta 53-60 / Abithal Keeper Porta 61-68
Abithal Porta / Winner Porta
ALCOA fb 12 Blindato / Formula F40 Porta / Formula F40 Tt Porta
Formula F50 Porta / Formula F50 Tt Porta / Formula F60 Tt Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO all.Co 5 Porta / All.Co 5 Tt Porta / Export 50 Porta
Export 50 Tt Porta / Sicurblin 65
ALNOR montreal Porta
ALU-K alublindo / N 45 Porta / N 53 Porta / N 55 Tt Porta
N 62 Tt Porta
ALU-MEC synthesis 57 Porta / Synthesis 60Tt Porta
ALUSUISSE alsec 2000 Porta 59 / Alsec 2000 Porta 69
BODEGA extrablind 70
DOMAL domal Break 52 Porta / Domal Break 70 Porta
Domal Security Porta / Domal Shops Porta / Domal Stopper Pg Porta
ESA blindal 60 Porta 1 Anta / Blindal 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / Blindal 70 Porta 2 Ante
FRESIA global 48 Porta
INDINVEST alpha 445 Porta 2 Ante
METRA nc 45 International Porta / Nc 45 Superthermic Porta
Nc 55 International Porta / Nc 68 Superthermic Porta
Nuovo Nc 50 Porta / Superblindo
NEW TEC new Tec 50 Porta Complanare
New Tec 52 Tt Porta Complanare / New Tec 68 Tt Porta Complanare
OCMAfc 60 Tt Porta / Sv 47 Porta 1 Anta / Sv 47 Porta 2 Ante
Sv 62 Porta 1 Anta / Sv 62 Porta 2 Ante / Sv 62 Tt Porta 1 Anta
Sv 62 Tt Porta 2 Ante
PASSERINI ekip Blindo / Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante / Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante / Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante / Ekip Thermo 53 Porta
PROFILATI"Pe ""Eku 53"" Porta"
"Pe ""Eku 64 Tt"" Porta"
"Pe ""Eku 72 Tt"" Porta"
SCHÜCO royal 78 St Blindato / Royal S 50 N / Royal S 55 Tt
Royal S 65 Tt
WICONA I60-A / L70-A

0387001 | 10 | - | 10


Full-size scale

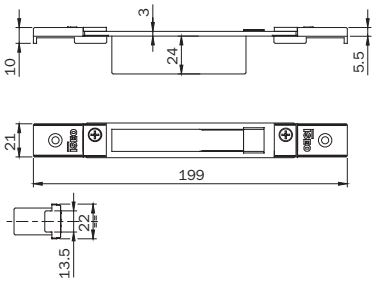



ADJUSTABLE closed striking plate for **LOCK**
WITH ONLY DEADBOLTS AND DEVIATORS MULTIBLINDO
series 78* - 96* - 98* 550 - 551 - 556 - 70* - 71* - 730*
731*. - 736 - 737. Material: BLACK-painted steel. Flat front plate
186x29 with vertical adjustment mm 7 to 12
and horizontal adjustment ± mm 2.

Euro groove

ALCAN abithal Cristal / Abithal Keeper Porta C.E. / Winner Finestra
ALCOA fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
ALL.CO export 40 Finestra / Export 45 Tt Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
ALU-MEC synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
ALUSUISSE alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
BODEGA bga 50 / New Bt 60
DOMAL domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
EQUIPE sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante / Sistema 8000 Tt Finestra 1 Anta
Sistema 8000 Tt Finestra 2 Ante
ESA isola Porta
ESEDRA ga 53 Porta / Tt 63 Porta / Tt 75 Porta
INDINVEST gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto / Gold 600 Complanare
Gold 600 Sormonto
METRA nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Nuovo Nc 40 Sorm. 2 Ante Con Riporto / Nuovo Nc 40 Sormonto 1 Anta
MORELLI ma 8300
OCMA fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
PASSERINI ekip 40 Evoluzione 1 Anta / Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 1 Anta / Ekip 40 Sormonto 2 Ante
Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra
Ekip Maastricht Th 68 Finestra
PROFILATI "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra" /Sistema 1 Pe 40 Comp./Est. 1 Anta
Sistema 1 Pe 40 Sormonto 1 Anta / Sistema 1 Pe 50 Comp./Est. 1 Anta
Sistema 1 Pe 50 Sormonto 1 Anta

0387011 | 10 | - | 10


Full-size scale

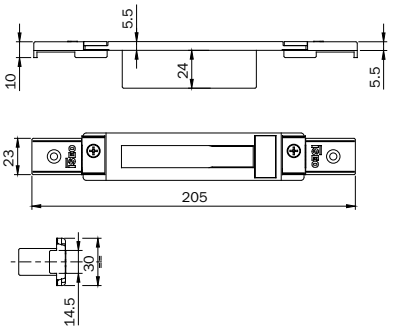

ADJUSTABLE closed striking plate for **LOCK**
WITH ONLY DEADBOLTS AND DEVIATORS MULTIBLINDO
series 78* - 96* 98* - 550 - 551 - 556 - 70* - 71* - 730*
731* - 736 - 737. Material: BLACK-painted steel. Flat front plate **205x30**
with horizontal adjustment ± mm 9.


ALCOA alublind / R 40 Reversibile 1 Anta / R 40 Reversibile 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare
ALL.CO all.Co 5 Reversibile / All.Co 5 Sormonto / Ites P4 Sormonto
ALU-K n 45 Reversibile
ESA giuntall Porta
FRESIA global 41 Complanare / Global 41 Sormonto
Global 48 Complanare / Global 48 Sormonto / Global 70 Taglio Termico
METRA nuovo Nc 50 Sormonto 1 Anta / Nuovo Nc 50 Sormonto 2 Ante
New Tecnew Tec 50 Porta Sormonto / New Tec 52 Tt Porta Sormonto
New Tec 60 Tt Porta Sormonto / New Tec 68 Tt Porta Sormonto
PASSERINI ekip 50 Sormonto 1 Anta / Ekip 50 Sormonto 2 Ante


0387021 | 10 | - | 10

ISEO ULTIMATE ACCESS TECHNOLOGIES

Code | Single package | Multiple package | Min. ord.

Adjustable closed striking plates



Full-size scale

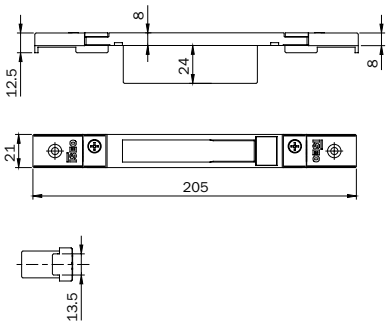


ALL.CO all.Co 5 Complanare / Ites P4 Complanare
ALNOR blindo Block / Montreal G.A.
ALU-K n 53 Complanare / N 55 Tt Complanare
ESA giuntall Complanare
INDINVEST alpha 255 Complanare / Alpha 370 Tt Complanare
Alpha 445 Finestra / Alpha 445 Porta 1 Anta
Alpha 658 Tt Complanare / Alpha Blitz 2000
Alpha Globo 45 / Alpha Globo 55
METRA nuovo Nc 40 Complanare / Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 50 Complanare
PASSERINI ekip 40 Complanare 1 Anta / Ekip 40 Complanare 2 Ante
Ekip 50 Complanare 1 Anta / Ekip 50 Complanare 2 Ante
Ekip Thermo 53 Finestra 1 Anta / Ekip Thermo 53 Finestra 2 Ante
Ekip Thermo 58 Finestra 1 Anta / Ekip Thermo 58 Finestra 2 Ante
PROFILATI sistema 1 Pe 40 Comp./Est. 2 Ante
Sistema 1 Pe 40 Sormonto 2 Ante / Sistema 1 Pe 50 Comp./Est. 2 Ante
Sistema 1 Pe 50 Sormonto 2 Ante

ADJUSTABLE closed striking plate for **LOCK**
WITH ONLY DEADBOLTS AND DEVIATORS MULTIBLINDO series 78* - 96* - 98*
550 - 551 - 556 - 70* - 71* - 730* - 731* - 736 - 737.
Material: BLACK-painted steel. Flat front plate **205x21**
with horizontal adjustment ± mm 9.

0387031 | 10 | - | 10


Full-size scale





"Erre" profile

ALCOA alublind / R 40 Reversibile 1 Anta / R 40 Reversibile 2 Ante
R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare

ADJUSTABLE closed striking plate for **LOCK**
WITH ONLY DEADBOLTS AND DEVIATORS MULTIBLINDO series 78* - 96* - 98*
550 - 551 - 556 - 70* - 71* - 730* - 731* - 736 - 737.
Material: BLACK-painted steel. Flat front plate **165x29**
with horizontal adjustment ± mm 13.

0387041 | 10 | - | 10


Full-size scale

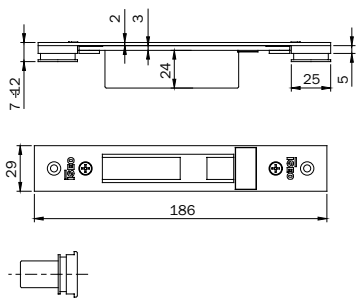


Door profile


ALCAN abithal Keeper Porta 53-60 / Abithal Keeper Porta 61-68
Abithal Porta / Winner Porta
ALCOA fb 12 Blindato / Formula F40 Porta / Formula F40 Tt Porta
Formula F50 Porta / Formula F50 Tt Porta / Formula F60 Tt Porta
Plana 1 Anta / Plana 2 Ante
ALL.CO all.Co 5 Porta / All.Co 5 Tt Porta / Export 50 Porta
Export 50 Tt Porta / Sicurblin 65
ALNOR montreal Porta
ALU-K alublindo / N 45 Porta / N 53 Porta / N 55 Tt Porta / N 62
Tt Porta
ALU-MEC synthesis 57 Porta / Synthesis 60Tt Porta
ALUSUISSE alsec 2000 Porta 59 / Alsec 2000 Porta 69
BODEGA extrablind 70
DOMAL domal Break 52 Porta / Domal Break 70 Porta
Domal Security Porta / Domal Shops Porta / Domal Stopper Pg Porta
ESA blindal 60 Porta 1 Anta / Blindal 60 Porta 2 Ante
Blindal 70 Porta 1 Anta / Blindal 70 Porta 2 Ante
FRESIA global 48 Porta
INDINVEST alpha 445 Porta 2 Ante
METRA nc 45 International Porta / Nc 45 Superthermic Porta
Nc 55 International Porta / Nc 68 Superthermic Porta / Nuovo Nc 50
Porta / Superblindo
NEW TEC new Tec 50 Porta Complanare
New Tec 52 Tt Porta Complanare / New Tec 68 Tt Porta Complanare
OCMA Sv 47 / 62 / 62 Tt Porta 1 Anta / 2 Ante / FC 60 Tt Porta
PASSERINI ekip Blindo / Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante / Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante / Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante / Ekip Thermo 53 Porta
PROFILATI "Pe ""Eku 53"" Porta" / "Pe ""Eku 64 Tt"" Porta"
"Pe ""Eku 72 Tt"" Porta"
SCHÜCO royal 78 St Blindato / Royal S 50 N / Royal S 55 Tt
Royal S 65 Tt
WICONA L60-A / L70-A

ADJUSTABLE closed striking plate for **HOOK DEVIATORS**
MULTIBLINDO. Material: BLACK-painted steel. Flat front plate
186x29 with vertical adjustment from mm 7 to 12
horizontal adjustment ± mm 2.

038710 | 10 | - | 1

Adjustable closed striking plates



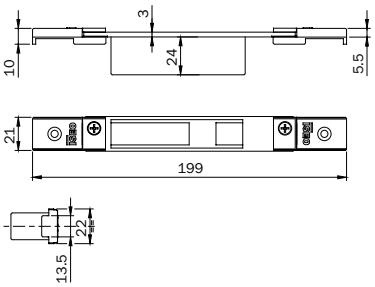



ADJUSTABLE closed striking plate for **HOOK DEVIATORS** MULTIBLINDO. Material: BLACK-painted steel. Flat front plate **197x21** with vertical adjustment through threaded plates and horizontal adjustment ± mm 9.

Euro groove

ALCAN abithal Cristal / Abithal Keeper Porta C.E. / Winner Finestra
ALCOA fb 12 GA / Europa GA / Fb 12 Tt / R35 Reversibile R35 Sormonto
ALL.CO export 40 / 45Tt / 50 / 50 Tt Finestra / Final 40 finestra Sicurblin C.E.
ALU-MEC synthesis 45 / 57 / 60 Tt Finestra
ALUSUISSE alsec 2000 Finestra 59 / 69
BODEGA bga 50 / New Bt 60
DOMAL domal Break 52 / 70 Finestra Domal Stopper Pg Finestra
EQUIPE sistema 8000 G.A. Finestra 1 Anta Sistema 8000 G.A. Finestra 2 ante
ESA isola porta
ESEDRA g.a. 53 Porta / Tt 63 Porta / Tt 65 Porta
INDINVEST gold 400 Complanare / Gold 400 Sormonto / Gold 500 Complanare / Gold 500 Sormonto / Gold 600 Complanare / Gold 600 Sormonto
METRA nc 45 International Finestra / Nc 45 Superthermic Finestra Nc 55 International Finestra / Nc 68 Superthermic Finestra / Nuovo Nc 40 Sormonto 2 Ante con Riporto / Nuovo Nc 40 Sormonto 1 Anta Porta / Superblindo
MORELLI ma 8300
OCMA fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
PASSERINI Ekip 40 Evoluzione 1 Anta / Ekip 40 Sormonto 1 Anta Ekip 40 Sormonto 2 Ante / Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
PROFILATI "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra" "Pe ""Eku 72 Tt"" Finestra" / Sistema Pe 1 40 Comp./Est. 1 Anta Sistema Pe 1 40 Sormonto 1 Anta / Sistema Pe 1 50 Comp./Est. 1 Anta Sistema Pe 1 50 Sormonto 1 Anta

Code	Single package	Multiple package	Min. ord.
038711	10	-	1





ADJUSTABLE closed striking plate for **HOOK DEVIATORS** MULTIBLINDO. Material: BLACK-painted steel. Flat front plate **165x29** horizontal adjustment ± mm 13.

"Erre" profile


ALCOA alublind / R 40 Reversibile 1 Anta / R 40 Reversibile 2 Ante R 40 Sormonto 1 Anta / R 40 Sormonto 2 Ante R 50 Sormonto 1 Anta / R 50 Sormonto 2 Ante R 50 Tt Sormonto 1 Anta / R 50 Tt Sormonto 2 Ante R 60 Tt Complanare


Code	Single package	Multiple package	Min. ord.
038712	10	-	1

ISEO ULTIMATE ACCESS TECHNOLOGIES



For Electa locks

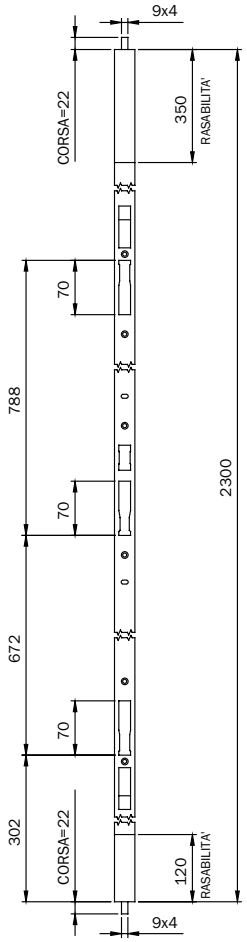





Full-size scale

ALCAN: WINNER PORTA
ALL.CO: All.Co 5 PORTA
All.Co 5 TT PORTA
SICURBLIN 65
FINAL: EXPORT 50 PORTA
ALNOR: MONTREAL PORTA
ALU. K: ALUBLINDO
N 45 PORTA
N 53 PORTA
Alu-mec: SYNTHESIS 57 PORTA
SYNTHESIS 60TT PORTA
DOMAL: Domal SECURITY
Domal STOPPER PG PORTA
METRA: NC 45 INTERNATIONAL PORTA
NC 55 INTERNATIONAL PORTA
NC 68 SUPERTHERMIC PORTA
NUOVO NC 50 PORTA
SUPERBLINDO
SCHÜCO : ROYAL 78 ST BLINDATO
PASSERINI: EKIP THERMO 53 PORTA

	Code	Single package	Multiple package	Min. ord.
Black-painted aluminium 22,5X10 mm	**038070**	1	-	1





Full-size scale


ALCAN: HABITAT PORTA
ALCOA: F40 PORTA
F40 TT PORTA
F50 PORTA
F50 TT PORTA
F60 TT PORTA
ALUSUISSE: ALSEC 2000 PORTA 59
ALSEC 2000 PORTA 69
BODEGA: EXTRABLIND 70
DOMAL: Domal BREAK 52 PORTA
Domal BREAK 70 PORTA
Domal SHOPS
NEW-TEC: NEW-TEC 52 PORTA COMP.
NEW-TEC 68 PORTA COMP.
OCMA : SV 47 PORTA 1 ANTA
SV 62 PORTA 1 ANTA
SV 62 TT PORTA


Striking plate for multi-point locks, **FOR TWO-WINGED DOORS WITH TIPS, WITH 3 DEADBOLT SEATS**,
same length as front plate. Material: BLACK-painted ALUMINIUM
Built-in TOP/BOTTOM TIPS.
Zamak upper striker.
STAINLESS STEEL floor keep.
Screws. Instruction sheet.

	Code	Single package	Multiple package	Min. ord.
Black-painted aluminium 20,5X12 mm	**038071**	1	-	1



For Electa locks

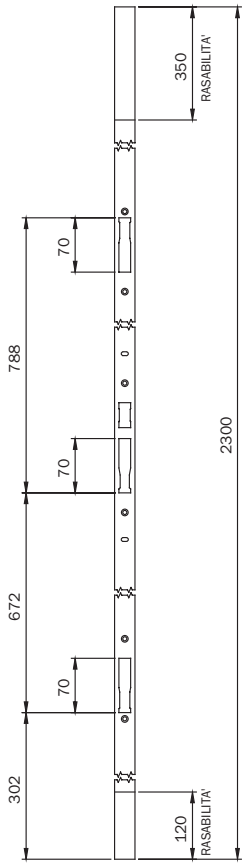




Full-size scale

ALCAN: WINNER PORTA
ALL.CO: All.Co 5 PORTA
All.Co 5 TT PORTA
SICURBLIN 65
FINAL: EXPORT 50 PORTA
ALNOR: MONTREAL PORTA
ALU. K: ALUBLINDO
N 45 PORTA
N 53 PORTA
Alu-mec: SYNTHESIS 57 PORTA
SYNTHESIS 60TT PORTA
DOMAL: Domal SECURITY
Domal STOPPER PG PORTA
METRA: NC 45 INTERNATIONAL PORTA
NC 55 INTERNATIONAL PORTA
NC 68 SUPERTHERMIC PORTA
NUOVO NC 50 PORTA
SUPERBLINDO
SCHÜCO : ROYAL 78 ST BLINDATO
PASSERINI: EKIP THERMO 53 PORTA

	Code	Single package	Multiple package	Min. ord.
Black-painted aluminium 22,5X10 mm	**038072**	1	-	1



Full-size scale


ALCOA: FB12 GA / FB 12 TT
SE GA / GR9
ALL.CO: VZ 400 / VZ 500
ALNOR: 400 / 500
Alu-mec: ELEGANT
BODEGA: 40 / 50 / 900
DOMAL: Domal BREAK 52 FINESTRA
Domal BREAK 70 FINESTRA
Domal STOPPER PG FIN.
ESA: BLINDAL 60
FINAL: EXPORT 50
EXPORT 50 TT
ITES: EXPORT 40
METRA: NC 40 / NC 50 B
NC 45 INTERNATIONAL FIN.
NC 55 INTERNATIONAL FIN.
NUOVO NC 50 PORTA
SUPERBLINDO
PASSERINI: EKIP 40 S / EKIP TT
TGP 40 / TGP 50

Striking plate for multi-point locks, same length as front plate.
FOR 1-WINGED DOORS WITHOUT TIPS,
WITH 3 DEADBOLT SEATS.
Black-painted. Screws. Instruction sheet.


	Code	Single package	Multiple package	Min. ord.
Black-painted steel 24X3 mm	**038074**	1	-	1

In steel for metal frames

	Code	Single package	Multiple package	Min. ord.




Full-size scale




Striking plate for European cylinder frames and double-bit rail frames
In STAINLESS STEEL **132x24x3**.
For locks with **DEADBOLT, HOOK AND**
per alluminio serie 78 - 96

ALCOA Fb 12 Blindato
Fb 12 Trad./Revamping
Gr 9
Plana 1 Anta
ESA Blindal 60 Porta 1 Anta
Blindal 60 Porta 2 Ante
ESA Blindal 70 Porta 1 Anta
Blindal 70 Porta 2 Ante
SCHÜCO Royal S 50 N
Royal S 55 Tt
Royal S 65 Tt

Code	Single package	Multiple package	Min. ord.
038020	10	-	10




Full-size scale




Striking plate for European cylinder frames and double-bit rail frames In zinc-plated steel **132x24x3**.
For locks with **DEADBOLT, HOOK AND DEVIATORS ONLY**
for aluminium frames series 78* - 96*

Code	Single package	Multiple package	Min. ord.
038022	10	-	10




Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic
Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra
"Pe" Eku 72 Tt Finestra

Striking plate for European cylinder frames and double-bit rail frames In STAINLESS STEEL **133x22x3**.
For locks with **DEADBOLT, HOOK AND DEVIATORS ONLY**
for aluminium frames series 78* - 96*

Code	Single package	Multiple package	Min. ord.
038021	10	-	10



Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic
Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra
"Pe" Eku 72 Tt Finestra


Striking plate for European cylinder frames and double-bit rail frames. In STAINLESS STEEL **132x22x1,5**.
For locks with **DEADBOLT, HOOK AND DEVIATORS ONLY**
for aluminium frames series 78* - 96*

Code	Single package	Multiple package	Min. ord.
038025	10	-	10

In steel for metal frames

	Code	Single package	Multiple package	Min. ord.







Full-size scale

Striking plate for frames and rail frames.
In STAINLESS STEEL **132x20x3** for series 77* - 78* - 96*
ONLY DEADBOLT, HOOK AND DEVIATORS

038027 | 1 | 10 | 10

METRA PARETI MOBILI







Full-size scale

Striking plate for frames and rail frames.
In STAINLESS STEEL **180x20x3** for series 77* - 78*
with **DEADBOLT, LATCHBOLT/ROLLER** and electric locks with handle
FOR SERIES 96* WITH DEADBOLT AND LATCHBOLT

038028 | 1 | 10 | 10

METRA PARETI MOBILI







Full-size scale

Striking plate for European cylinder frames and double-bit rail frames STAINLESS STEEL **180x24x3**. For aluminium frames series 77* - 78* with **DEADBOLT, LATCHBOLT/ROLLER** and electric locks with handle **FOR SERIES 96* WITH DEADBOLT AND LATCHBOLT**

038030 | 10 | - | 10

ALCOA Fb 12 Blindato
Fb 12 Trad./Revamping
Gr 9
Piana 1 Anta
ESA Blindal 60 Porta 1 Anta
Blindal 60 Porta 2 Ante
ESA Blindal 70 Porta 1 Anta
Blindal 70 Porta 2 Ante
SCHÜCO Royal S 50 N
Royal S 55 Tt
Royal S 65 Tt







Full-size scale

Striking plate for European cylinder frames and double-bit rail frames STAINLESS STEEL **180x22x3**. For aluminium frames series 77* 78* with **DEADBOLT, LATCHBOLT/ROLLER** and electric locks with handle **FOR SERIES 96* WITH DEADBOLT AND LATCHBOLT**

038031 | 10 | - | 10

Alcan Abithal Cristal / Abithal Keeper Porta C.E.
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta
Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra
Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe ""Eku 53"" Finestra" / "Pe ""Eku 64 Tt"" Finestra"
"Pe ""Eku 72 Tt"" Finestra"






Full-size scale


Striking plate for European cylinder frames.
In stainless steel **180x24x3**. For **LATCHBOLT AND HOOK LOCKS** for aluminium frames series 77*- 78*

038033 | 10 | - | 10

ALCOA fb 12 Blindato
Fb 12 Trad./Revamping
Gr 9
Piana 1 Anta
ESA blindal 60 Porta 1 Anta
Blindal 60 Porta 2 Ante
ESA blindal 70 Porta 1 Anta
Blindal 70 Porta 2 Ante
SCHÜCO royal S 50 N
Royal S 55 Tt
Royal S 65 Tt

In steel for metal frames



Full-size scale




ADJUSTABLE striking plate for European cylinder frames and double-bot rail frames. STAINLESS STEEL **180x22x1,5**. For aluminium frame series 77*-78* For locks with **DEADBOLT AND LATCHBOLT/ROLLER** and electric lock with handle. **FOR SERIES 96* WITH DEADBOLT AND LATCHBOLT**

Alcan Abithal Cristal / Abithal Keeper Porta C.E. Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto Gold 500 Complanare / Gold 500 Sormonto Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra "Pe" Eku 72 Tt Finestra

Code	Single package	Multiple package	Min. ord.
038035	10	-	10



Full-size scale




ADJUSTABLE striking plate for European cylinder frames and double-bit rail frames NICKEL **180x22x3**. For aluminium frames series 77*- 78* with **DEADBOLT, LATCHBOLT/ROLLER** and electric locks with handle. **FOR SERIES 96* WITH DEADBOLT AND LATCHBOLT**

Alcan Abithal Cristal / Abithal Keeper Porta C.E. Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra Export 50 Tt Finestra / Final 40 Finestra / Sicurblin C.E.
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Ga 53 Porta / Tt 63 Porta / Tt 63 Porta Tt 75 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto Gold 500 Complanare / Gold 500 Sormonto Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra / Nc 45 Superthermic Finestra
Nc 55 International Finestra / Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante / Ekip 40 Sormonto 2 Ante Ekip 50 Sormonto 2 Ante / Ekip Maastricht 53 Finestra Ekip Maastricht Th 60 Finestra / Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra "Pe" Eku 72 Tt Finestra

Code	Single package	Multiple package	Min. ord.
038106	10	-	10


Full-size scale







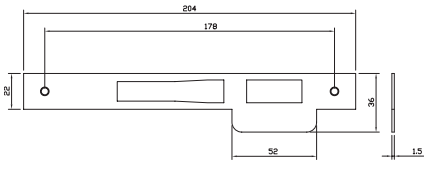


Striking plate for locks for metal frames, stainless steel **204x22x1,5.** For series 77* - 78*, **DEADBOLT AND LATCHBOLT/ROLLER** and electric lock with handle.







FOR SERIES 96* WITH DEADBOLT AND LATCHBOLT

Code	Single package	Multiple package	Min. ord.
038240	1	10	10


In steel for metal frames


		Code	Single package	Multiple package	Min. ord.
Full-size scale	 **ADJUSTABLE** striking plate for European cylinder frames. STAINLESS STEEL **164x22x1**. For locks with **DEADBOLT AND LATCHBOLT** for aluminium frames series 78* - 79*	**038032**	10	-	10
Full-size scale	 **ADJUSTABLE** striking plate for European cylinder frames and double-bot rail frames. STAINLESS STEEL **134x22x1**. For locks with **DEADBOLT AND DEVIATORS ONLY** for aluminium frames series 79* - 96* - 98*	**038034**	10	-	10
Full-size scale	 **ADJUSTABLE** closed striking plate **FOR HOOK DEVIATORS** STAINLESS STEEL **134x22x1**. for aluminium frames 79*	**038036**	10	-	10
Full-size scale	 Striking plate for mechanical double-bit rail frames. STAINLESS STEEL **150x24x3**. For **DEADBOLT AND LATCHBOLT LOCKS** for aluminium frames series 981* - 983* **ALCOA:** FB 12 GA / FB 12 TT SE GA / GR9 **ALL.CO:** VZ 400 / 500 **ALNOR:** 400 / 500 **Alu-mec:** Elegant **BODEGA:** BO 40 / 50 / 900 **ESA:** Blindal 60 / 70 NT 40 G / 50 G **DOMAL:** Domal Stopper PG fin. Domal Break 52 / 70 finestra Domal 40 sormonto 1 anta **METRA:** NC 40 / NC 50 B NC 45 / 55 international finestra **PASSERINI:** TGP 40 / TGP 50 Ekip 40 / 50 sormonto 2 ante **PANDOLFO SCHUCO:** Royal S 50 / Royal S 55 TT Royal S 65 T	**038050**	10	-	10
Full-size scale	 Striking plate for double-bit rail frames with **DEADBOLT AND LATCHBOLT**. **150x24x3**. **Zinc-plated** steel. For locks series 981 - 983	**038080**	10	-	10
Full-size scale	 Striking plate for double-bit rail frames electric locks. STAINLESS STEEL **150x24x3**. For **ELECTRIC LOCKS** for aluminium frames series 981* - 983* **ALCOA:** FB 12 GA / FB 12 TT SE GA / GR9 **ALL.CO:** VZ 400 / 500 **ALNOR:** 400 / 500 **Alu-mec:** Elegant **BODEGA:** BO 40 / 50 / 900 **ESA:** Blindal 60 / 70 NT 40 G / 50 G **DOMAL:** Domal Stopper PG fin. Domal Break 52 / 70 finestra Domal 40 sormonto 1 anta **METRA:** NC 40 / NC 50 B NC 45 / 55 international finestra **PASSERINI:** TGP 40 / TGP 50 Ekip 40 / 50 sormonto 2 ante **PANDOLFO SCHUCO:** Royal S 50 / Royal S 55 TT Royal S 65 T	**038060**	10	-	10
	 Striking plate for oval-cylinder frames. For LOCKS with **LATCHBOLT OR ROLLER ONLY** 762 - 764 CHROME-PLATED steel **88x16x3 mm**	**033003**	10	-	10
	CHROME-PLATED steel **88x20x3 mm**	**033004**	10	-	10

In steel for metal frames


	Code	Single package	Multiple package	Min. ord.
				
Striking plate for oval-cylinder frames.				
For locks with **LATCHBOLT AND DEADBOLT OR ROLLER** only 750 - 751 - 752 - 753				
CHROME-PLATED steel **170x16x3 mm**	**033013**	10	-	10
CHROME-PLATED steel **170x20x3 mm**	**033014**	10	-	10
				
Striking plate for oval-cylinder frames.				
For LOCKS with **DEADBOLT ONLY** series 758 - 759 - 760 - 761				
CHROME-PLATED steel **95x16x3 mm**	**033033**	10	-	10
CHROME-PLATED steel **95x20x3 mm**	**033034**	10	-	10
				
Striking plate for European cylinder frames.				
For locks with **DEADBOLT AND LATCHBOLT** series 741 - 743 - 745				
STAINLESS STEEL **238x22x3 mm**	**033080**	10	-	10
CHROME-PLATED steel **238x22x3 mm**	**033083**	10	-	10
GOLD-PAINTED steel **238x22x3 mm**	**033086**	10	-	10
				
Striking plate for oval-cylinder frames. In chrome-plated steel 180x16x3.				
For locks with **LATCHBOLT AND DEADBOLT OR ROLLER** only 754 - 755 - 756 - 757				
CHROME-plated steel **180x16x3 mm**	**033091**	10	-	10
CORROSION-RESISTANT CHROME-plated brass **180x16x3 mm**	**033091.9**	10	-	10
CHROME-plated steel **180x20x3 mm**	**033092**	10	-	10
CORROSION-RESISTANT chrome-plated brass **180x20x3 mm**	**033092.9**	10	-	10
				
Striking plate for oval-cylinder frames.				
For locks with **DEADBOLT ONLY** series 766 - 767				
CHROME-plated steel **110x16x3 mm**	**033093**	10	-	10
CORROSION-RESISTANT chrome-plated brass **180x20x3 mm**	**033093.9**	10	-	10
CHROME-plated steel **110x20x3 mm**	**033094**	10	-	10
				
Striking plate for oval-cylinder frames.				
For **HOOK** locks series 768 - 769				
CHROME-plated steel **97x20x3 mm**	**033095**	10	-	10

In aluminium for metal frames



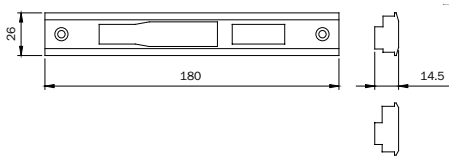

Alu-k: N45 reversibile
METRA: Nuovo NC 50 porta
PASSERINI:
Ekip Thermo 53 fin. 1 anta




Full-size scale

Striking plate for European cylinder frames and double-bit rail frames
In black anodised **ALUMINIUM**. For **LOCKS**
WITH DEADBOLT AND ROLLER series 78* - 96* - 98*

	Code	Single package	Multiple package	Min. ord.
DISCONTINUED	**038111**	10	-	10



Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Tt 63 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra
Nc 45 Superthermic Finestra / Nc 55 International Finestra
Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 2 Ante / Ekip 50 Sormonto 2 Ante
Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra
Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra
"Pe" Eku 72 Tt Finestra


European cylinder striking plate for frames.
In **ZAMAK.** For LOCKS with
DEADBOLT AND LATCHBOLT, ROLLER AND ELECTRIC LOCKS
with handle for series 741 - 781

	Code	Single package	Multiple package	Min. ord.
	033149	10	-	10

In nylon for metal frames




Full-size scale




All.Co **All.Co** 5 Porta
All.Co 5 Tt Porta
Export 50 Porta
Export 50 Tt Porta
Sicurblin 65
Alcan Abithal Porta
Winner Porta
Alnor Montreal Porta
Alu-k Alublindo
N 45 Porta
N 53 Porta
N 55 Tt Porta
N 62 Tt Porta
Alu-mec Synthesis 60Tt Porta
Alusuisse Alsec 2000 Porta 59
Alsec 2000 Porta 59
Alsec 2000 Porta 69
Bodega Extrablind 70
Domal Domal Break 52 Porta
Domal Security Porta
Domal Shops Porta
Domal Stopper Pg Porta
Metra Nc 45 International Porta
Nc 45 Superthermic Porta
Nc 55 International Porta
Nc 68 Superthermic Porta
Nuovo Nc 50 Porta
Superblindo
Ocma Sv 47 Porta 1 Anta
Sv 47 Porta 2 Ante
Sv 62 Porta 1 Anta
Sv 62 Porta 2 Ante
Sv 62 Tt Porta 1 Anta
Sv 62 Tt Porta 2 Ante
Passerini Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante
Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante
Ekip Thermo 53 Porta
Schüco Royal 78 St Blindato
Wicona L60-A
L70-A

European cylinder striking plate for frames. In **NYLON**. For **LOCKS WITH DEADBOLT, LATCHBOLT, ROLLER AND ELECTRIC LOCKS** for aluminium frames series 78*-79*

	Code	Single package	Multiple package	Min. ord.
Alcoa Alublind R 40 Reversibile 1 Anta	**038011**	10	-	10



Full-size scale




R 40 Reversibile 2 Ante
R 40 Sormonto 1 Anta
R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta
R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta
R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare
Alu-mec Synthesis 57 Porta
Metra 50 Porta Sormonto
Metra 52 Tt Porta Sormonto
Metra 60 Tt Porta Sormonto
Metra 68 Tt Porta Sormonto

European cylinder striking plate for frames. In **NYLON**. For **LOCKS WITH DEADBOLT, LATCHBOLT, ROLLER AND ELECTRIC LOCKS** for aluminium frames series 78*-79*


	Code	Single package	Multiple package	Min. ord.
	038012	10	-	10

In nylon for metal frames

	Code	Single package	Multiple package	Min. ord.




Full-size scale




Alcoa Fb 12 Blindato
Gr 9
Plana 1 Anta
Esa Blindal 60 Porta 1 Anta
Blindal 60 Porta 2 Ante

European cylinder striking plate for frames. In **NYLON**.
For **LOCKS WITH DEADBOLT, LATCHBOLT, ROLLER AND ELECTRIC LOCKS**
for aluminium frames series 78*-79* — **038015** | 10 | - | 10




Full-size scale




Alcan Abithal Cristal / Abithal Keeper Porta C.E
Winner Finestra
Alcoa Fb 12 Ga / Europa Ga / Fb 12 T.T. / R 35 Reversibile
R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Tt Finestra / Final 40 Finestra
Alu-mec Synthesis 45 Finestra / Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Alusuisse Alsec 2000 Finestra 59 / Alsec 2000 Finestra 69
Bodega Bga 50 / New Bt 60
Domal Domal Break 52 Finestra / Domal Break 70 Finestra
Domal Stopper Pg Finestra
Equipe Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esa Isola Porta
Esedra Ga 53 Porta / Tt 63 Porta / Tt 75 Porta
Indinvest Gold 400 Complanare / Gold 400 Sormonto
Gold 500 Complanare / Gold 500 Sormonto
Gold 600 Complanare / Gold 600 Sormonto
Metra Nc 45 International Finestra
Nc 45 Superthermic Finestra / Nc 55 International Finestra
Nc 68 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 2 Ante / Ekip 50 Sormonto 2 Ante
Ekip Maastricht 53 Finestra / Ekip Maastricht Th 60 Finestra
Ekip Maastricht Th 68 Finestra
Profilati "Pe"Eku 53 Finestra / "Pe" Eku 64 Tt Finestra
"Pe" Eku 72 Tt Finestra

European cylinder striking plate for frames. In **NYLON**.
For **LOCKS WITH DEADBOLT, LATCHBOLT,**
ROLLER AND ELECTRIC LOCKS
with handle for aluminium frames series 78* — **038319** | 10 | - | 10

In nylon for metal frames




Full-size scale




Alcoa Formula F40 Porta
Formula F40 Tt Porta
Formula F50 Porta
Formula F50 Tt Porta
Formula F60 Tt Porta
All.Co All.Co 5 Complanare
Ites P4 Complanare
Alnor Blindo Block
Montreal G.A.
Alu-k N 53 Complanare
N 55 Tt Complanare
Bodega Extrablind 70
Domal Domal Break 70 Porta
Esa Giuntall Porta
Indinvest Alpha 445 Finestra
Alpha 445 Porta 1 Anta
Alpha Globo 45
Metra Nuovo Nc 40 Complanare
Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 50 Complanare
New TecMetra 50 Porta Complanare
Metra 52 Tt Porta Complanare
Metra 68 Tt Porta Complanare
Ocma Fc 60 Tt Porta
Passerini Ekip 40 Complanare 1 Anta
Ekip 40 Complanare 2 Ante
Ekip Thermo 53 Finestra 2 Ante
Profilati "Pe ""Eku 53"" Porta"
"Pe ""Eku 64 Tt"" Porta"
"Pe ""Eku 72 Tt"" Porta"
Sistema Pe 1 40 Comp./Est. 2 Ante
Sistema Pe 1 40 Sormonto 2 Ante
Sistema Pe 1 50 Comp./Est. 2 Ante
Sistema Pe 1 50 Sormonto 2 Ante

European cylinder striking plate for frames. In **NYLON**. For **LOCKS WITH DEADBOLT, LATCHBOLT, ROLLER AND ELECTRIC LOCKS** with handle for aluminium frames series 78*-79*

Code	Single package	Multiple package	Min. ord.
038321	10	-	10



Full-size scale




All.Co All.Co 5 Reversibile
All.Co 5 Sormonto
Esa Giuntall Complanare


European cylinder striking plate for frames. In **NYLON**. For **LOCKS WITH DEADBOLT, LATCHBOLT, ROLLER AND ELECTRIC LOCKS** with handle for aluminium frames series 78*

Code	Single package	Multiple package	Min. ord.
038322	10	-	10

In nylon for metal frames



Full-size scale




All.Co **All.Co** 5 Porta
All.Co 5 Tt Porta, Export 50 Porta
Export 50 Tt Porta, Sicurblin 65
Alcan Abithal Porta
Winner Porta
Alnor Montreal Porta
Alu-k Alublindo
N 45 Porta, N 53 Porta


N 55 Tt Porta, N 62 Tt Porta
Alu-mec Synthesis 60Tt Porta
Alusuisse Alsec 2000 Porta 59
Alsec 2000 Porta 59
Alsec 2000 Porta 69
Bodega Extrablind 70
Domal Domal Break 52 Porta
Domal Security Porta
Domal Shops Porta
Domal Stopper Pg Porta
Metra Nc 45 International Porta
Nc 45 Superthermic Porta
Nc 55 International Porta
Nc 68 Superthermic Porta
Nuovo Nc 50 Porta
Superblindo
Ocma Sv 47 Porta 1 Anta
Sv 47 Porta 2 Ante
Sv 62 Porta 1 Anta
Sv 62 Porta 2 Ante
Sv 62 Tt Porta 1 Anta
Sv 62 Tt Porta 2 Ante
Passerini Ekip Maastricht 53 Porta 1 Anta
Ekip Maastricht 53 Porta 2 Ante
Ekip Maastricht Th 60 Porta 1 Anta
Ekip Maastricht Th 60 Porta 2 Ante
Ekip Maastricht Th 68 Porta 1 Anta
Ekip Maastricht Th 68 Porta 2 Ante
Ekip Thermo 53 Porta
Schüco Royal 78 St Blindato
Wicona L60-A, L70-A

European cylinder striking plate for frames. In **NYLON**.
For LOCKS with **DEADBOLT AND DEVIATORS ONLY**
for aluminium frames series 77* - 78*

Code	Single package	Multiple package	Min. ord.
038511	10	-	10



Full-size scale




Alcoa Alublind
R 40 Reversibile 1 Anta
R 40 Reversibile 2 Ante
R 40 Sormonto 1 Anta
R 40 Sormonto 2 Ante
R 50 Sormonto 1 Anta
R 50 Sormonto 2 Ante
R 50 Tt Sormonto 1 Anta
R 50 Tt Sormonto 2 Ante
R 60 Tt Complanare
Alu-mec Synthesis 57 Porta
New Tec
Metra 50 Porta Sormonto
Metra 52 Tt Porta Sormonto
Metra 60 Tt Porta Sormonto
Metra 68 Tt Porta Sormonto


European cylinder striking plate for frames. In **NYLON**.
For locks with **DEADBOLT AND DEVIATORS ONLY**
for aluminium frames series 77* - 78*

Code	Single package	Multiple package	Min. ord.
038512	10	-	10

In nylon for locks with oval cylinder



Full-size scale




Tipo GR 9


Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 70* - 71* - 730 - 731

Code	Single package	Multiple package	Min. ord.
033025	10	-	10

In nylon for metal frames

	Code	Single package	Multiple package	Min. ord.



Full-size scale

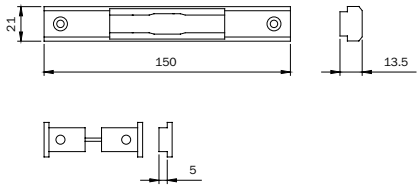


All.Co All.Co 5 Complanare / **All.Co** 5 Complanare
All.Co 5 Complanare / Ites P4 Complanare
Ites P4 Complanare
Alnor Montreal G.A.
Alu-k N 45 Complanare / N 53 Complanare
N 55 Tt Complanare
Esa Giuntall Complanare / Giuntall Complanare
Giuntall Complanare / Giuntall Complanare
Giuntall Sormonto / Giuntall Sormonto
Giuntall Sormonto / Giuntall Sormonto
Isola Complanare / Isola Sormonto
Indinvest Alpha 445 Finestra
Alpha 445 Finestra
Alpha Globo 45
Alpha Globo 45
Metra Nuovo Nc 40 Complanare
Nuovo Nc 40 Complanare
Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 40 Sormonto 2 Ante
Nuovo Nc 50 Complanare
Nuovo Nc 50 Complanare
Passerini Ekip Thermo 53 Finestra 2 Ante
Ekip Thermo 53 Finestra 2 Ante

Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 70* - 71* - 730 - 731

033026 10 - 10



Full-size scale

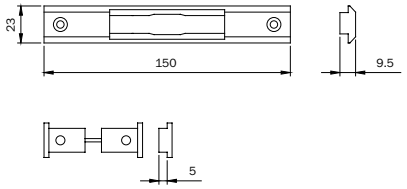


Alcan Abithal Finestra / Abithal Finestra
Abithal Finestra / Winner Finestra
Alcoa Fb 12 Ga / Europa Ga
Fb 12 Ga / Europa Ga / Fb 12 T.T. /
Fb 12 T.T.
R 35 Reversibile / R 35 Sormonto
All.Co Export 40 Finestra / Export 50 Finestra
Export 50 Finestra
Alu-mec Synthesis 45 Finestra
Synthesis 57 Finestra
Synthesis 60 Tt Finestra
Bodega Bga 50 / Bga 50 / Bga 50
Domal Domal Break 52 Finestra
Domal Stopper Pg Finestra
Equipe Emal 40 W
Sistema 8000 G.A. Finestra 1 Anta
Sistema 8000 G.A. Finestra 2 Ante
Esedra Ga 53 Porta / Ga 53 Porta
Ga 53 Porta / Tt 63 Porta
Indinvest Gold 400 Complanare
Gold 400 Sormonto
Gold 500 Complanare
Gold 500 Sormonto
Metra Nc 45 International Finestra
Nc 45 International Finestra
Nc 45 International Finestra
Nc 45 Superthermic Finestra
Nc 45 Superthermic Finestra
Nc 45 Superthermic Finestra
Morelli Ma 8300
Ocma Fc 47 Finestra / Fc 55 Finestra
Fc 55 Finestra / Fc 60 Tt Finestra
Passerini Ekip 40 Evoluzione 2 Ante
Ekip 40 Evoluzione 2 Ante
Ekip 40 Sormonto 2 Ante
Ekip 40 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante
Ekip 50 Sormonto 2 Ante
Ekip Maastricht 53 Finestra

Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 70* - 71*
730 - 731 - 736 - 737

033027 10 - 10



Full-size scale

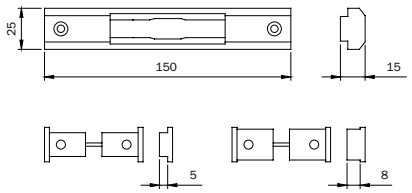


Alcoa Piana 2 Ante
Piana 2 Ante
Domal Domal 40 Sormonto 2 Ante
Domal 40 Sormonto 2 Ante
Indinvest Alpha 255 Complanare
Alpha 255 Complanare
Alpha Globo 55
Alpha Globo 55

Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 70* - 71*
730 - 731 - 736 - 737

033028 10 - 10


Full-size scale

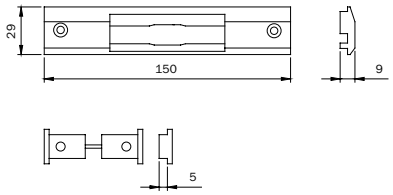


All.Co Ites P4 Sormonto
Ites P4 Sormonto
Domal Domal 40 Sormonto 1 Anta
Domal 40 Sormonto 1 Anta
Metra Nuovo Nc 40 Sormonto 1 Anta
Nuovo Nc 40 Sormonto 1 Anta
Nuovo Nc 40 Sormonto 1 Anta
Passerini Ekip 40 Evoluzione 1 Anta
Ekip 40 Evoluzione 1 Anta
Ekip 40 Sormonto 1 Anta
Ekip 40 Sormonto 1 Anta
Ekip 50 Sormonto 1 Anta
Ekip 50 Sormonto 1 Anta


Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 556 - 70* - 71*
730 - 731 - 736 - 737

033029 10 - 10

In nylon for metal frames

	Code	Single package	Multiple package	Min. ord.




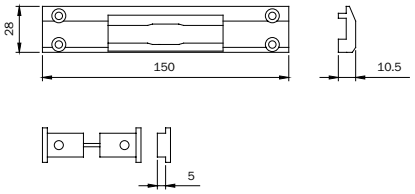


All.Co All.Co 5 Reversibile
All.Co 5 Reversibile
All.Co 5 Reversibile
All.Co 5 Sormonto
All.Co 5 Sormonto
All.Co 5 Sormonto
Metra Nuovo Nc 50 Sormonto 1 Anta / 2 Ante
Nuovo Nc 50 Sormonto 1 Anta / 2 Ante
Nuovo Nc 50 Sormonto 1 Anta / 2 Ante

Full-size scale

Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 70* - 71*
730 - 731 - 736 - 737 — **033030** | 10 | - | 10







da mm 40

ALL.CO:
VZ 400/400S
ALNOR:
400
Alu-mec:
F 40
BODEGA:
BO 40/900
ESA:
NT 40G
METRA:
NC 40

Oval-cylinder striking plate for frames. In **NYLON**.
For LOCKS with **DEADBOLT AND LATCHBOLT OR ROLLER**
series 750 - 751 - 752 - 753 — **033040** | 10 | - | 10

Full-size scale







Alcoa Piana 1 Anta / Piana 1 Anta
All.Co Vz 500 / Vz 400 P / Vz 500 /
Vz 400 P
Vz 500 / Vz 400 P / Vz 500 / Vz 400 P
Alnor 500 / 500 / 500
Alu-mec F 50 / F 50 / F 50
Bodega Bo 40 / 900
Bo 40 / 900
Esa Nt 50 G
Nt 50 G
Esedra 50 Piano
50 Piano
50 Piano
Fresia Ft 50
Indinvest Te 50
Te 50
Te 50
Te 50
Metra Nc 50 B
Nc 50 B
Nc 50 B
Nc 50 B
Passerini T.G.P. 50
T.G.P. 50
T.G.P. 50

Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 556 -70* - 71* - 730 - 731 — **033050** | 10 | - | 10

Full-size scale






Alcoa Fb 12 Trad./Revamping
Fb 12 Trad./Revamping
Fb 12 Trad./Revamping
Gr 9
Gr 9
All.Co Vz 400 / Vz 400 S
Vz 400 / Vz 400 S
Alnor 400
400
Alu-mec F 40
F 40
Bodega Bo 50
Bo 50
Esa Nt 40 G
Nt 40 G
Esedra 40 Piano
Fresia Ft 40
Ft 40
Indinvest Te 40/45
Te 40/45
Metra Nc 40 / 40 L
Nc 40 / 40 L
Passerini T.G.P. 40
T.G.P. 40


Full-size scale

Oval-cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 70* - 71* - 730 - 731 — **033051** | 10 | - | 10

ISEO ULTIMATE ACCESS TECHNOLOGIES

In nylon for metal frames



Full-size scale

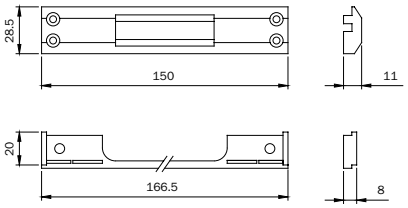


Alcoa R 40 Reversibile 1 Anta / 2 Ante
R 40 Reversibile 1 Anta / 2 Ante
R 40 Reversibile 1 Anta / 2 Ante
R 40 Sormonto 1 Anta / 2 Ante
R 40 Sormonto 1 Anta / 2 Ante
R 40 Sormonto 1 Anta / 2 Ante
R 50 Sormonto 1 Anta / 2 Ante
R 50 Sormonto 1 Anta / 2 Ante
R 50 Tt Sormonto 1 Anta / 2 Ante
R 50 Tt Sormonto 1 Anta / 2 Ante
R 60 Tt Complanare
Esa Nt 45 G 1 Anta
Nt 45 G 1 Anta
Nt 45 G 1 Anta

Oval cylinder striking plate for rail frames. In **NYLON**.
For LOCKS series 550 - 551 - 556 - 70 - 71 - 73
730 - 731

Code	Single package	Multiple package	Min. ord.
033065	10	-	10


Full-size scale

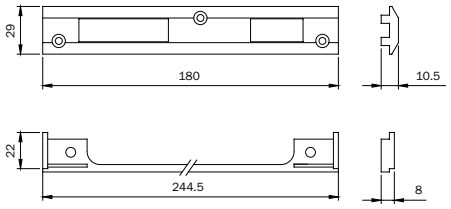



da mm 50

ALCOA: R 40 / R 50

European cylinder striking plate for frames.
In **NYLON**. For LOCKS with **DEADBOLT and LATCHBOLT**
series 741 - 743 - 745 - 749 - 200 - 205 - 221 - 240 - 250

Code	Single package	Multiple package	Min. ord.
033066	10	-	10


Full-size scale








camera europea

Alcan Winner finestra
ALCOA: FB 12 TT / SE G.A.
Alu-mec: Synthesis 45 / 57 /60TT
ALUSUISSE: Alsec 2000 fin.59/69
BODEGA BGA 50 /New BT60
DOMAL: Domal Stopper PG fin.
Domal Break 52 finestra
Domal Break 70 finestra
EQUIPE Sistema 8000-Emal 40 W
ESA Isola porta
ESEDRA G 53 comp.
TT63 comp. - TT 75 comp.
FINAL: Export 50 finestra
Export 50TT finestra
INDINVEST: Gold 400 / 500 / 600
ITES: Export 40finestra
MORELLI MA 8300
OCMA FC 55 finestra
PASSERINI: Ekip 40 sorm.. 2 ante
Ekip 40 evoluzione 2 ante
Ekip 50 sormonto 2 ante
Ekip thermo

European cylinder striking plate for frames.
In **NYLON**. For LOCKS with **DEADBOLT and LATCHBOLT**
series 741 - 743 - 745 - 749 - 200 - 205 - 221 - 240 - 250

Code	Single package	Multiple package	Min. ord.
033067	10	-	10

In nylon for metal frames

	Code	Single package	Multiple package	Min. ord.
 Oval cylinder front plate support for rail frames with front plate mm 16. In **NYLON**.	**033071**	10	-	10
 Front plate support in **NYLON 290x25** for LOCKS for European cylinder aluminium frames.	**038002**	10	-	10
 Pair of front plate support spacers in **NYLON 25x6**, For locks with European profile cylinder aluminium frames and double-bit rail frames.	**038004**	10	-	10
 Pair of front plate support spacers in **NYLON 25x6**, For locks with European profile cylinder aluminium frames and double-bit rail frames.	**990841**	10	-	10
 **NYLON** insert to be used with roller locks series 78 and striking plates 03860*	**040880**	10	-	10